

# ABERDEEN




Sophisticated, yet robust, public realm area-lighting post top. High IP and IK resistance with elegant lines and commanding technical optical performance choices to meet any lighting brief.




## Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency PMMA lens
- Clear acrylic PMMA diffuser


### Feature

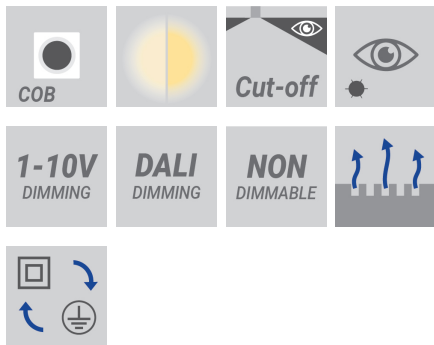


### Optic

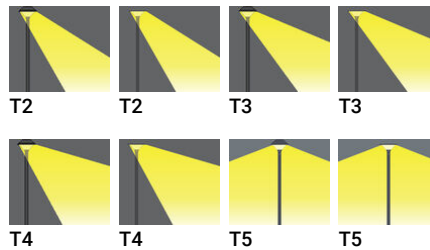

### Product colour

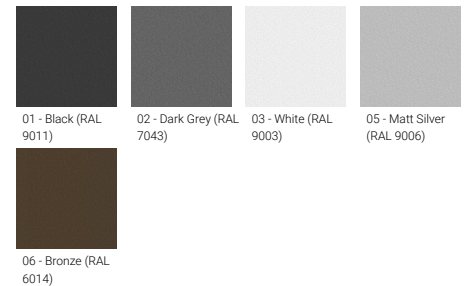

### Special finishes upon request

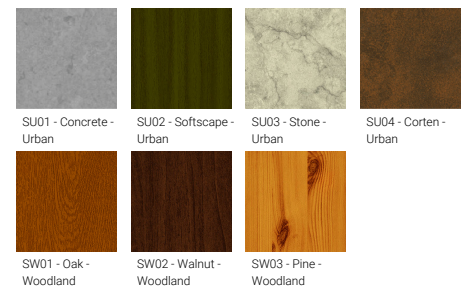



# ABERDEEN



## Technical information

	Model number	Light source	Power	Lumen	Optic	CCT / CRI	Dimming type	Weight	
<b>Top Ø700 mm</b>									
ABERDEEN 1	<b>ABA-20001</b>	24 LED	45 W	5627 - 6228 lm	T2 [142°x59°], T3 [142°x72°], T4 [102°x63°], T5 [119°x147°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	16.5 kg	
ABERDEEN 1	<b>ABA-20002</b>	24 LED	61 W	7212 - 7996 lm	T2 [142°x59°], T3 [142°x72°], T4 [102°x63°], T5 [119°x147°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	16.5 kg	
<b>Top Ø700 mm - LIGHTCONNECT™</b>									
ABERDEEN 1	<b>ABA-20001-LC</b>	24 LED	45 W	5627 - 6228 lm	T2 [142°x59°], T3 [142°x72°], T4 [102°x63°], T5 [119°x147°]	3000K CRI80, 4000K CRI80	DALI	16.5 kg	
ABERDEEN 1	<b>ABA-20002-LC</b>	24 LED	61 W	7212 - 7996 lm	T2 [142°x59°], T3 [142°x72°], T4 [102°x63°], T5 [119°x147°]	3000K CRI80, 4000K CRI80	DALI	16.5 kg	
<b>Top Ø740 mm</b>									
ABERDEEN 2	<b>ABA-20011</b>	24 LED	45 W	5627 - 6228 lm	T2 [142x59], T3 [142x72], T4 [102x63], T5 [119°x147°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	15.0 kg	

## Accessory

	 NEMA 7 socket <b>A90891</b>	 Zhaga Book 18 socket (Up) <b>A90991-U</b>	 DALI Control System <b>Control-DALI</b>
ABA-20001			•
ABA-20001-LC	•	•	•
ABA-20002			•
ABA-20002-LC	•	•	•
ABA-20011			•

ABA-20001, ABA-20002

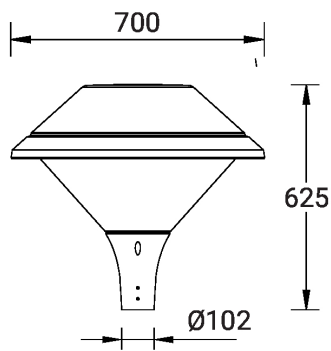

ABA-20011

