



# AMOS



Recessed, recessed low-glare downlight family. Perfect controlled lighting environments and no fuss.

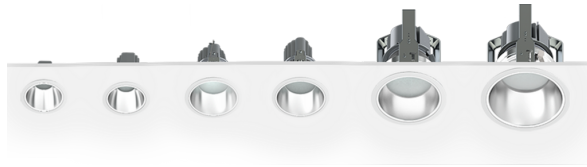


## Luminaire Structure

- Die-cast aluminium housing with powder coating


- Die-cast aluminium heat sink with excellent thermal management  
- Aluminium reflector with white powder coating

- Remote driver is included

## Feature

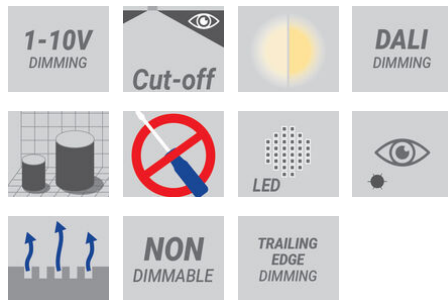

## Optic



## Product colour



## AMOS

## Technical information

	Model number	Light source	Power	Lumen	Optic	CCT / CRI	Dimming type	Weight
<b>Ø107 mm</b>								
AMOS 1	<b>AM-80001</b>	5 LED	9 W	633 - 817 lm	N [35°], M [43°], W [52°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI, Trailing edge	0.51 kg
AMOS 1	<b>AM-80011</b>	7 LED	12 W	1036 - 1204 lm	N [35°], M [41°], W [49°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI, Trailing edge	0.51 kg
<b>Ø138 mm</b>								
AMOS 2	<b>AM-80021</b>	9 LED	15 W	1044 - 1398 lm	N [33°], M [40°], W [46°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI, Trailing edge	0.95 kg
AMOS 2	<b>AM-80031</b>	12 LED	20 W	1308 - 1680 lm	N [35°], M [35°], W [41°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI, Trailing edge	0.95 kg
<b>Ø160 mm</b>								
AMOS 3	<b>AM-80041</b>	18 LED	29 W	2336 - 3009 lm	N [26°], M [32°], W [41°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	1.59 kg
<b>Ø203 mm</b>								
AMOS 4	<b>AM-80051</b>	24 LED	39 W	3438 - 4020 lm	N [26°], M [33°], W [43°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	2.10 kg.

## Accessories



DALI Control System  
**Control-DALI**

AM-80001	•
AM-80011	•
AM-80021	•
AM-80031	•
AM-80041	•
AM-80051	•

**AMOS**

