

# ANESTI




Technical post top. Deceptively urban aesthetic post top packs a punch with street lighting type precise optic options.




## Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency PMMA lens
- Clear acrylic PMMA diffuser
- Driver is to be installed within the pole-head. Please contact the factory for pole compatibility.


## Feature

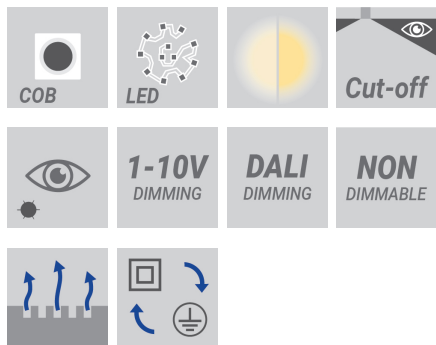


## Optic

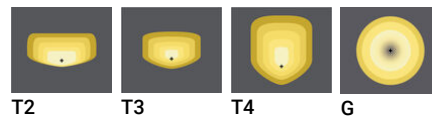

## Product colour

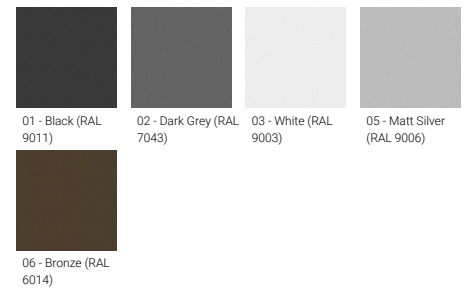


## Special finishes upon request

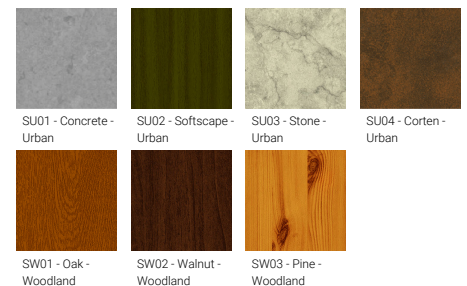









# ANESTI

## Technical information

	Model number	Light source	Power	Lumen	Optic	CCT / CRI	Dimming type	Weight
<b>Supplied with a cylindrical, straight aluminium pole - Height options: 3 - 6 m</b>								
ANESTI 1	<b>AN-20595</b>	1 COB	41 W	956 - 1005 lm	G [360°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	26.9 kg
ANESTI 1	<b>AN-20597</b>	24 LED	51 W	6697 - 7102 lm	T2 [143°x58°], T3 [129°x77°], T4 [106°x73°]	3000K CRI80, 4000K CRI80	On/Off	29.8 kg 


## Accessory

	 Root mount kit <b>A20491</b>	 Root mount kit <b>A20691</b>	 Circuit breaker box IP44 <b>A21291</b>	 3 m - Cylindrical, straight aluminium pole DIA. 102 mm <b>APD130102-ASP</b>	 4 m - Cylindrical, straight aluminium pole DIA. 102 mm <b>APD140102-ASP</b>	 5 m - Cylindrical, straight aluminium pole DIA. 127 mm <b>APD150127-ASP</b>	 6 m - Cylindrical, straight aluminium pole DIA. 127 mm <b>APD160127-ASP</b>
AN-20595	•	•	•	•	•	•	•
AN-20597	•	•	•	•	•	•	•

	 DALI Control System <b>Control-DALI</b>
AN-20595	•
AN-20597	

**ANESTI**

**AN-20595**

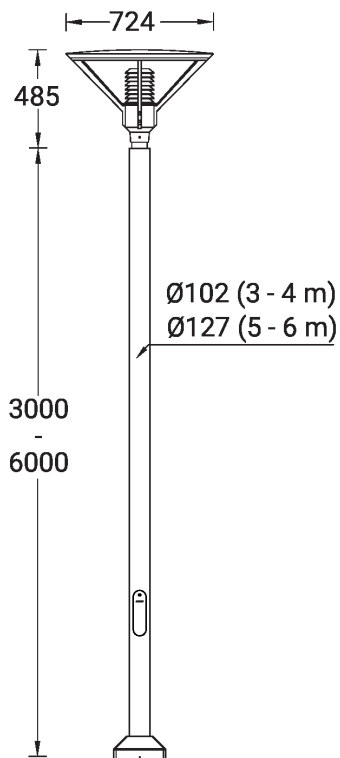

**AN-20597**

