

AQUA




Modern underwater narrow projector and floodlight family. Your high power, professional flexible recessed pool and water-feature solution.




Luminaire Structure

- Stainless steel body in grade 316
- Single cable entry
- Stainless steel fasteners in grade 316
- Durable silicone rubber gasket
- Clear toughened glass
- Remote driver is included for constant current (CC) products and is not IP-rated
- Remote driver is not included for constant voltage (CV) products
- Remote box IP-rated is not included and is to be ordered separately for constant current (CC) products
- Recessing box in PVC is included
- Luminaire must be submerged when operational
- Maximum depth 2 m
- Outdoor cable needs to be ordered with a specific length


Feature

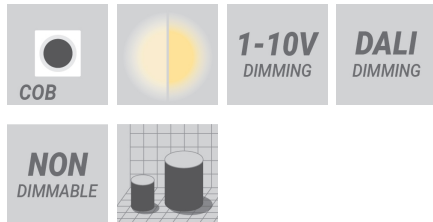

Optic

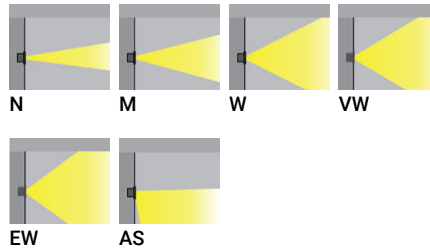

Product colour













AQUA

Technical information

	Model number	Light source	Power	Lumen	Optic	CCT / CRI	Dimming type	Weight
Without remote box IP-rated - With remote driver / recessing box - Constant current (CC) 1050 mA								
AQUA 2	AQ-60011	1 COB	21 W	1555 - 1648 lm	M [26°], W [42°], VW [60°]	3000K CRI80, 4000K CRI80	On/Off	2.2 kg
Without remote box IP-rated - With remote driver / recessing box - Constant current (CC) 2670 mA								
AQUA 3	AQ-60021	1 COB	38 W	3140 - 3380 lm	N [24°], M [36°], W [39°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V	3.8 kg
Without remote box IP-rated - With remote driver / recessing box - Constant current (CC) 700 mA								
AQUA 1	AQ-60001	1 COB	14 W	881 - 1057 lm	M [33°], W [42°], VW [53°], EW [67°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V	1.1 kg
Without remote driver - With recessing box - Constant voltage (CV) 24 V								
AQUA 4	AQ-60031	1 COB	12 W	884 - 1004 lm	M [37°], W [44°], VW [52°], EW [67°]	3000K CRI80, 4000K CRI80	On/Off	1.1 kg
AQUA 5	AQ-60041	1 COB	18 W	1344 - 1498 lm	M [28°], W [45°], VW [73°]	3000K CRI80, 4000K CRI80	On/Off	1.2 kg
AQUA 6	AQ-60051	1 COB	27 W	2043 - 2151 lm	AS [41°x31°]	3000K CRI80, 4000K CRI80	On/Off	3.8 kg


Accessory

	 Driver (CV) - On/Off - 36 W - IP67 - 24 V A34491-ND	 Driver (CV) - On/Off - 60 W - IP67 - 24 V A34591-ND	 Driver (CV) - On/Off - 100 W - IP67 - 24 V A34791-ND	 Driver (CV) - On/Off - 150 W - IP67 - 24 V A34891-ND	 Driver (CV) - On/Off - 200 W - IP67 - 24 V A34991-ND	 Driver (CV) - On/Off - 350 W - IP67 - 24 V A35091-ND	 Remote box IP65 A61851
AQ-60001							
AQ-60011							
AQ-60021							
AQ-60031	•	•	•	•	•	•	
AQ-60041	•	•	•	•	•	•	
AQ-60051	•	•	•	•	•	•	



	 Remote box IP65 A80191	 Remote box IP65 A80291	 DALI Control System Control-DALI
AQ-60001			•
AQ-60011	•		
AQ-60021			•
AQ-60031			
AQ-60041			
AQ-60051			

AQUA

AQ-60001, AQ-60031

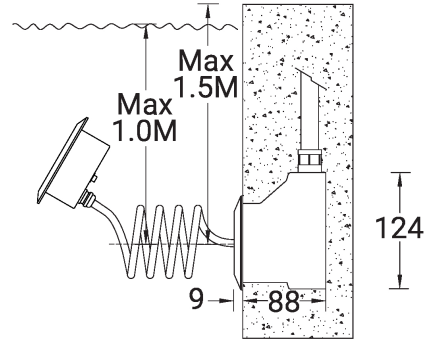

AQ-60011, AQ-60041

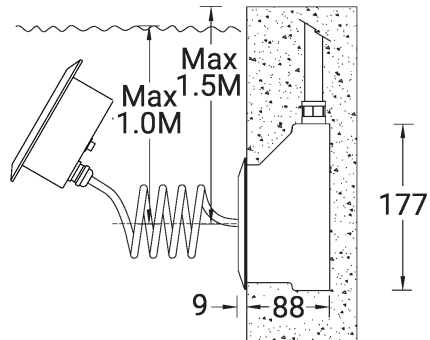

AQ-60021, AQ-60051

