



ARIZONA



Streamlined multi function. Clean-lined, smooth round decorative ambient lighting column with either lateral diffuser optic or triple or quadruple-internal adjustable projector options.

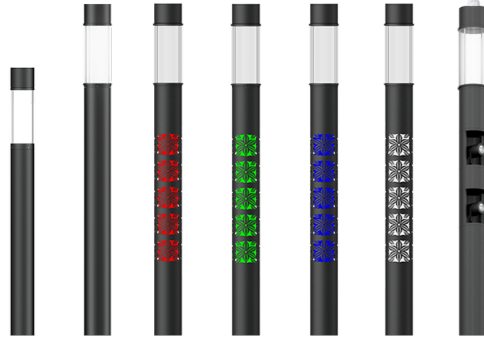


Luminaire Structure

- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear acrylic PMMA diffuser
- High-efficiency optical reflector or PMMA lens
- Maximum wind load resistance is 140 km/h
- Surge protection 10kV
- For ARIZONA 8, the luminaire and the lighting pole with illuminated decorative graphic are controlled separately. Upon request, they can be controlled together by the same protocol, either DMX or DALI.


Feature




Optic

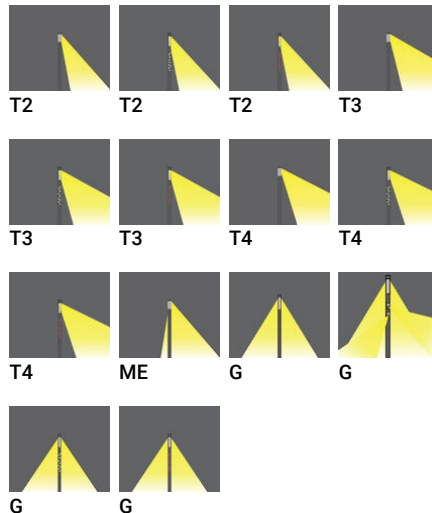

Product colour

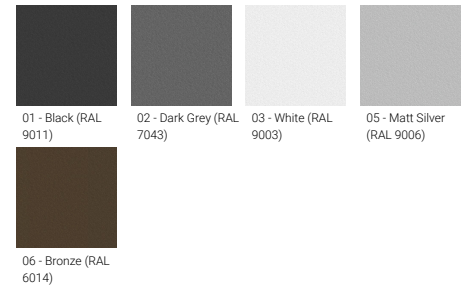



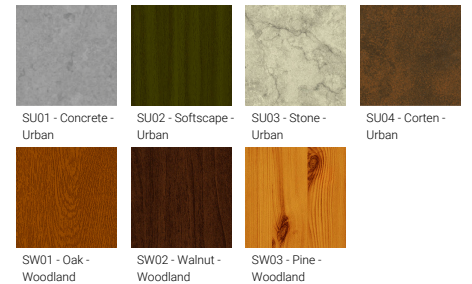




Special finishes upon request



ARIZONA

Technical information

	Model number	Light source	Power	Lumen	Optic	CCT / CRI	Dimming type	Weight	
Ø160 mm - Supplied with specific 2.5 m cylindrical, straight aluminium pole: APD125160-AR-21012- IP55 - IK07									
ARIZONA 1	AR-21012	1 COB	28 W	1639 - 1826 lm	G [52°x 73°]	2700K CRI80, 3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	23.3 kg	
Ø225 mm - Supplied with specific 3 m cylindrical, straight aluminium pole: APD130225-AR-20973 - IP65 - IK06									
ARIZONA 2	AR-20973	1 COB	34 W	2848 - 3123 lm	G [60°x69°]	2700K CRI80, 3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	34.8 kg	
Ø225 mm - Supplied with specific 3 m cylindrical, straight aluminium pole: APD130225-AR-20973 - LIGHTCONNECT™									
ARIZONA 2	AR-20973-LC	1 COB	34 W	2848 - 3123 lm	G [60°x69°]	2700K CRI80, 3000K CRI80, 4000K CRI80	DALI	34.8 kg	
Ø225 mm - Supplied with specific 3 m cylindrical, straight aluminium pole: APD130225-AR-20974 - IP65 - IK06									
ARIZONA 2	AR-20974	16 LED	35 W	3288 - 3697 lm	T2 [142°x 52°], T3 [137°x 65°], T4 [93°x 64°], ME [135°x 60°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	34.8 kg	
Ø225 mm - Supplied with specific 3 m cylindrical, straight aluminium pole: APD130225-AR-20974 - LIGHTCONNECT™									
ARIZONA 2	AR-20974-LC	16 LED	35 W	3156 - 3697 lm	T2 [142°x 52°], T3 [137°x 65°], T4 [93°x 64°], ME [135°x 60°]	2700K CRI80, 3000K CRI80, 4000K CRI80	DALI	34.8 kg	 
Ø225 mm - Supplied with specific 3 m cylindrical, straight aluminium pole: APD130225-AR-21131 - 2 projectors - IP65 - IK06									
ARIZONA 6	AR-21131	3 COB	74 W	2967 - 6367 lm	G [60°x69°]	3000K CRI80, 4000K CRI80, 2700K CRI80	On/Off, 1-10V, DALI	48.0 kg	
Ø225 mm - Supplied with specific 3 m cylindrical, straight aluminium pole: APD130225-AR-21131 - 2 projectors - LIGHTCONNECT™									
ARIZONA 6	AR-21131-LC	3 COB	74 W	2697 - 6367 lm	G [60°x69°]	3000K CRI80, 4000K CRI80, 2700K CRI80	DALI	48.0 kg	
Ø225 mm - Supplied with specific 3.675 m cylindrical, straight aluminium lighting poles with illuminated decorative graphic: APG130225-001-8030, APG130225-001-8040 (45W - On/Off) - IP65 - IK07									
ARIZONA 8	AR-21151	1 COB, 3 x 15 LED	34 W	2848 - 3123 lm	G [60°x69°]	2700K CRI80, 3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	85.3 kg	
ARIZONA 8	AR-21152	16 LED, 3 x 15 LED	82 W	2756 - 3519 lm	T2 [142°x 52°], T3 [137°x 65°], T4 [93°x 64°]	2700K CRI80, 3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	85.3 kg	
Ø225 mm - Supplied with specific 3.675 m cylindrical, straight aluminium lighting poles with illuminated decorative graphic: APG130225-001-RGBW (45W - DMX/DMXRDM) - IP65 - IK07									
ARIZONA 8	AR-21161	1 COB, 3 x 16 LED	87 W	3419 - 3657 lm	G [360°]	RGBW30, RGBW40	DMX, DMX/RDM	84.8 kg	
ARIZONA 8	AR-21162	16 LED, 3 x 16 LED	85 W	2911 - 3519 lm	T2 [142°x 52°], T3 [137°x 65°], T4 [93°x 64°]	RGBW30, RGBW40	DMX, DMX/RDM	84.8 kg	

Accessory

We reserve the right to make technical and design changes.








07:15, 08-04-2026




<https://www.ligman.com/arizona-light-columns-ari-li3/>

THAILAND
LIGMAN Lighting Co.,Ltd.
17/2 Moo 4, Monthong, Bang Nam Prio, 24150 Chachoengsao - Thailand
info@ligman.com




ARIZONA

	 Root mount kit A20691	 Root mount kit A20791	 Circuit breaker box IP44 A21291	 Custom decorative graphic A23291	 NEMA 7 socket A90891	 Zhaga Book 18 socket (Up) A90991-U	 Smart Pole Accessories Accs-Smart-Pole
AR-20973		•	•				
AR-20973-LC		•	•		•	•	•
AR-20974		•	•				
AR-20974-LC		•	•		•	•	•
AR-21012	•		•				
AR-21131		•	•				
AR-21131-LC		•	•		•	•	•
AR-21151		•	•	•			
AR-21152		•	•	•			
AR-21161		•	•	•			
AR-21162		•	•	•			


	 DALI Control System Control-DALI	 DMX Control System Control-DMX	 DMX/RDM Control System Control-DMX- RDM
AR-20973	•		
AR-20973-LC	•		
AR-20974	•		
AR-20974-LC	•		
AR-21012	•		
AR-21131	•		
AR-21131-LC	•		
AR-21151	•		
AR-21152	•		
AR-21161	•	•	•
AR-21162	•	•	•

ARIZONA


AR-21012

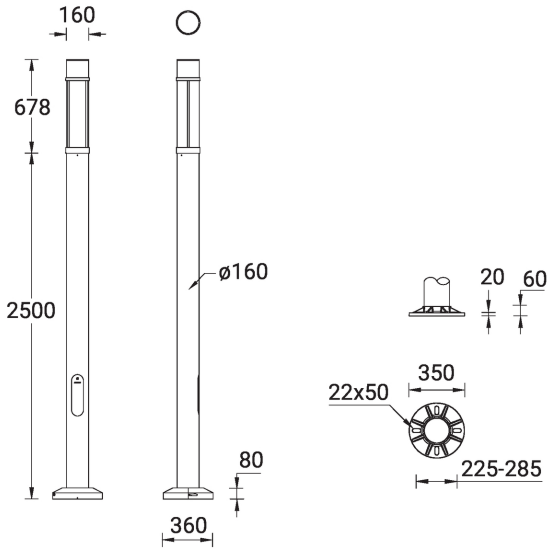


AR-21131

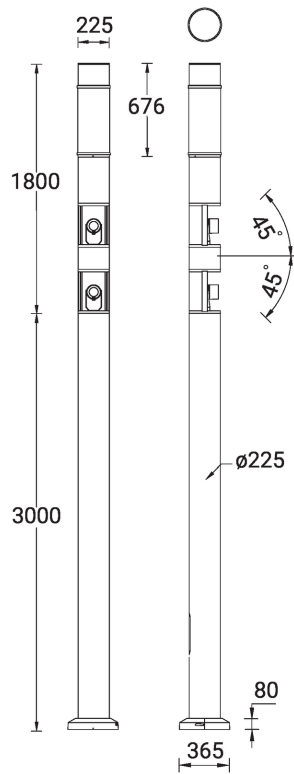

AR-20973, AR-20974

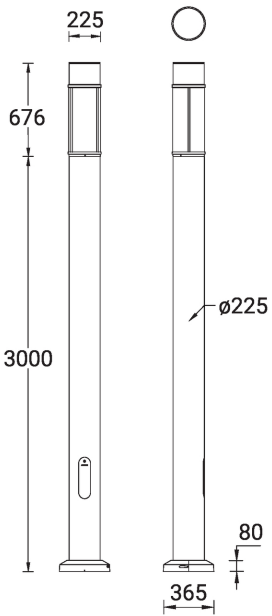

AR-21151, AR-21152
AR-21161, AR-21162

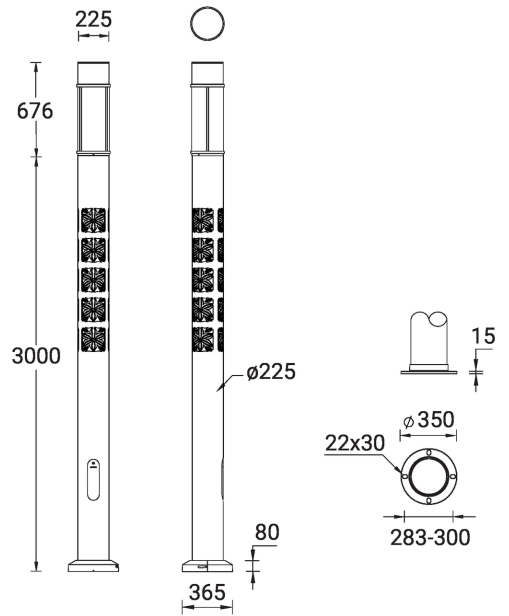

ARIZONA



ARIZONA
Post top luminaires

Streamlined lighting post top. Clean-lined, smooth round decorative ambient lighting post top with clear PMMA diffuser

<https://www.ligman.com/arizona-post-top-luminaires-ar-po3/>