

AUSTIN




Contemporary, angular wall-mounted downlight. Diverse glare-free optical range, high performance and high output make AUSTIN a versatile option for multiple applications.




Luminaire Structure

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Stainless steel fasteners in grade 316
- Durable silicone rubber gasket
- High-efficiency PMMA lens
- Clear toughened glass
- Integral control gear

Feature

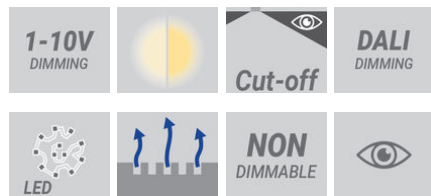


Light symbol

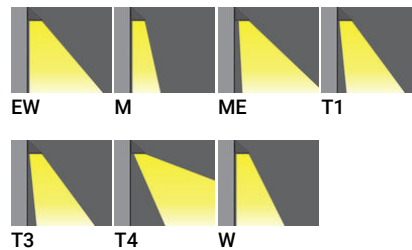

Product colour



Special finishes upon request

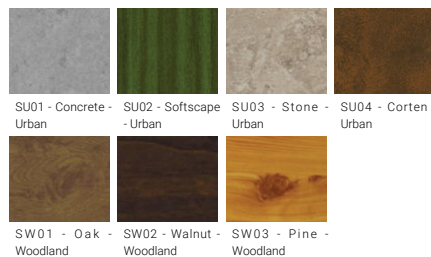

We reserve the right to make technical and design changes.

01:41, 22-09-2021



<https://www.ligman.com/austin-surface-facade-luminaires-aus-su3/>

Europe
LIGMAN EUROPE s.r.o.
VGP Park Ústí nad Labem
P 2 120
40317, Přestanov
Czech Republic
+420 477 071 500
sales.cz@ligman.com

ASIA PACIFIC
LIGMAN Lighting Co.,Ltd.
17/2 Moo4 Monthong
Bangnampreaw
24150, Chachoengsao
Thailand
+66 2 108 6700
info@ligman.com

AUSTIN

Technical information

	Model number	Light source	Power	Lumen	Optic	CCT / CRI	Dimming type	Weight	
AUSTIN 1	AU-30601	24 LED	37 W	4454 - 5121 lm	EW [112°], M [30°], ME [140°x63°], T1 [145°x75°], T2 [136°x58°], T3 [123°x93°], T4 [105°x69°], W [56°]	3000K CRI80, 4000K CRI80	DALI, 1-10V, On/Off	5.9 kg	
AUSTIN 1	AU-30602	24 LED	53 W	6244 - 7178 lm	EW [112°], M [30°], ME [140°x63°], T1 [145°x75°], T2 [136°x58°], T3 [123°x93°], T4 [105°x69°], W [56°]	3000K CRI80, 4000K CRI80	DALI, 1-10V, On/Off	5.9 kg	

We reserve the right to make technical and design changes.

01:41, 22-09-2021

<https://www.ligman.com/austin-surface-facade-luminaires-aus-su3/>

Europe
LIGMAN EUROPE s.r.o.
VGP Park Ústí nad Labem
P 2 120
40317, Přestanov
Czech Republic
+420 477 071 500
sales.cz@ligman.com

ASIA PACIFIC
LIGMAN Lighting Co.,Ltd.
17/2 Moo4 Monthong
Bangnampreaw
24150, Chachoengsao
Thailand
+66 2 108 6700
info@ligman.com