


BAKER



Recessed low-glare asymmetric wall washers. Invisible wall lighting with perfect glare control.



Luminaire Structure


- Die-cast aluminium housing with powder coating

- Die-cast aluminium heat sink with excellent thermal management


- Remote driver is included

- Aluminium reflector with white powder coating

Feature

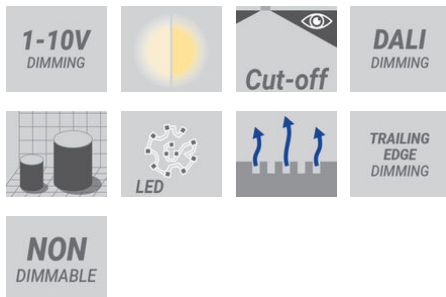

Optic



Product colour



BAKER

Technical information

	Model number	Light source	Power	Lumen	Optic	CCT / CRI	Dimming type	Weight
Ø107 mm								
BAKER 1	BK-80001	5 LED	9 W	344 - 481 lm	N [19°], M [25°], W [34°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI, Trailing edge	0.66 kg.
BAKER 1	BK-80011	7 LED	12 W	537 - 674 lm	N [19°], M [25°], W [34°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI, Trailing edge	0.66 kg.
Ø138 mm								
BAKER 2	BK-80021	9 LED	15 W	592 - 728 lm	N [19°], M [25°], W [34°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI, Trailing edge	0.98 kg.
BAKER 2	BK-80031	12 LED	20 W	814 - 998 lm	N [19°], M [25°], W [34°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI, Trailing edge	0.98 kg.
Ø160 mm								
BAKER 3	BK-80041	18 LED	29 W	1319 - 1695 lm	N [19°], M [25°], W [34°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	1.45 kg.
Ø203 mm								
BAKER 4	BK-80051	24 LED	39 W	1842 - 2271 lm	N [19°], M [25°], W [34°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	2.10 kg.

Accessories



DALI Control
System
Control-DALI

BK-80001	•
BK-80011	•
BK-80021	•
BK-80031	•
BK-80041	•
BK-80051	•

BAKER

