


CAPSULE



Shielded, wall-mounted bulkhead range.
Classic utilitarian bulkheads with numerous options and a contemporary twist.

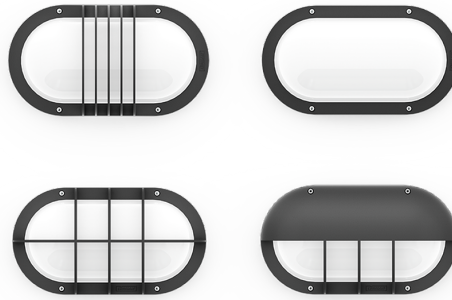


Luminaire Structure

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Opal UV-stabilised polycarbonate diffuser
- Integral control gear

Feature




Optic

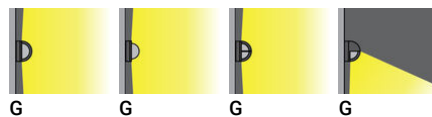

Product colour



Special finishes upon request

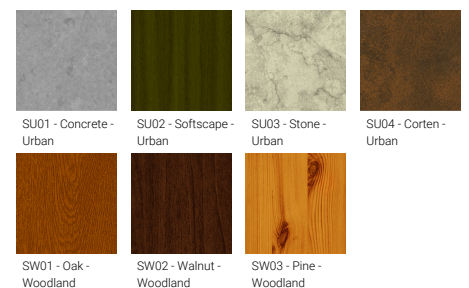

CAPSULE


Technical information

	Model number	Light source	Power	Lumen	Optic	CCT / CRI	Dimming type	Weight
CAPSULE 1	CA-30305	96 LED	15 W	1247 - 1313 lm	G [99°x165°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	2.5 kg
CAPSULE 3	CA-30325	96 LED	15 W	1518 - 1597 lm	G [126°x163°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	2.2 kg
CAPSULE 4	CA-30596	96 LED	15 W	1355 - 1427 lm	G [106°x172°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	2.5 kg
CAPSULE 5	CA-30606	96 LED	15 W	670 - 705 lm	G [101°x22°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	2.6 kg
Tunable white								
CAPSULE 1	CA-30306	192 LED	16 W	1188 lm	G [99°x164°]	TW (2700K - 6500K)	DALI	2.5 kg
CAPSULE 3	CA-30326	192 LED	16 W	1455 lm	G [125°x161°]	TW (2700K - 6500K)	DALI	2.2 kg
CAPSULE 4	CA-30597	192LED	16 W	1224 lm	G [108°x169°]	TW (2700K - 6500K)	DALI	2.5 kg
CAPSULE 5	CA-30607	192 LED	16 W	632 lm	G [102°x23°]	TW (2700K - 6500K)	DALI	2.6 kg
With integrated motion sensor								
CAPSULE 1	CA-30305-1MS	96 LED	15 W	1247 - 1313 lm	G [99°x165°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V	2.5 kg
CAPSULE 3	CA-30325-1MS	96 LED	15 W	1518 - 1597 lm	G [126°x163°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V	2.2 kg
CAPSULE 4	CA-30596-1MS	96 LED	15 W	1355 - 1427 lm	G [106°x172°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V	2.5 kg
CAPSULE 5	CA-30606-1MS	96 LED	15 W	670 - 705 lm	G [101°x22°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V	2.6 kg

Accessory



Remote controller for the motion sensor - 1-10V (A34191)
A34391




DALI Control System
Control-DALI



CA-30305		•
CA-30305-1MS	•	•
CA-30306		•
CA-30325		•
CA-30325-1MS	•	•
CA-30326		•
CA-30596		•
CA-30596-1MS	•	•
CA-30597		•
CA-30606		•
CA-30606-1MS	•	•
CA-30607		•

CAPSULE


CA-30305
CA-30305-1MS
CA-30306

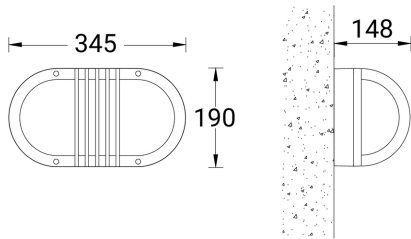



CA-30325
CA-30325-1MS
CA-30326

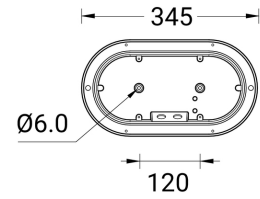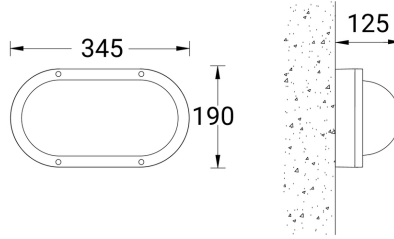

CA-30596
CA-30596-1MS
CA-30597

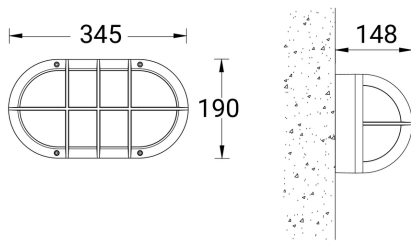

CA-30606
CA-30606-1MS
CA-30607

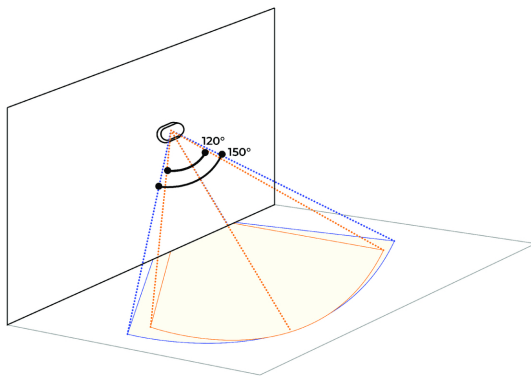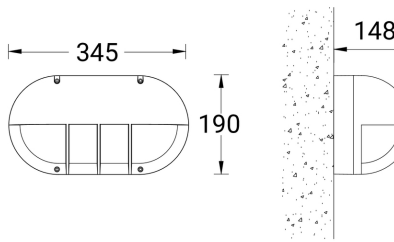

CAPSULE

- ***** Motion sensor - Microwave - 1-10 V

Adjustable sensor: (10 seconds - 15 minutes)

150° Sensitivity

Sensor detection area:

 - CA-30305-1MS (2.7 - 6.8 m)
 - CA-30325-1MS (3.0 - 7.0 m)
 - CA-30596-1MS (3.0 - 6.5 m)
 - CA-30606-1MS (1.6 - 4.0 m)

- ***** Motion sensor - Microwave - On/Off

Adjustable sensor: (5 seconds - 30 minutes)

120° Sensitivity

Sensor detection area:

 - CA-30305-1MS (2.3 - 5.5 m)
 - CA-30325-1MS (2.6 - 7.0 m)
 - CA-30596-1MS (1.4 - 5.5 m)
 - CA-30606-1MS (1.3 - 2.4 m)