


FORREY




High efficiency meets the classic form factor. Complete range of decorative lighting solutions packing a punch with multiple beam distributions and superior efficacies.

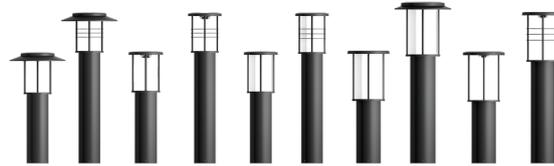


Luminaire Structure

- Die-cast aluminium housing and frame
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Models with shade will have colour white coating at inside of shade luminaire and outside surface coating according to colour of luminaire
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- With or without opal UV-stabilised polycarbonate diffuser or high-efficiency PMMA lens
- Integral control gear
- FORREY luminaires with opal lens and colder than 3000K CCT do not meet the IDA certification requirements

Feature

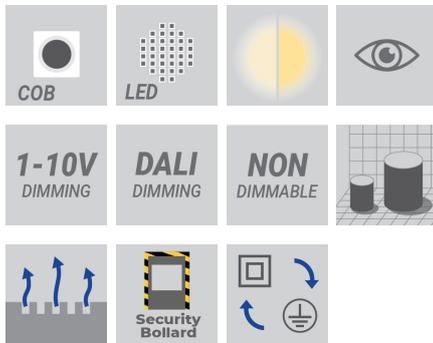


Optic

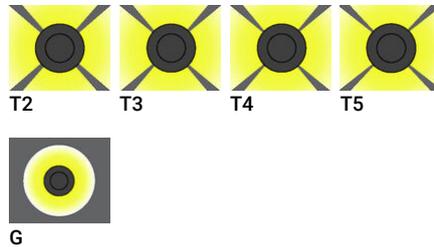

Product colour



Special finishes upon request

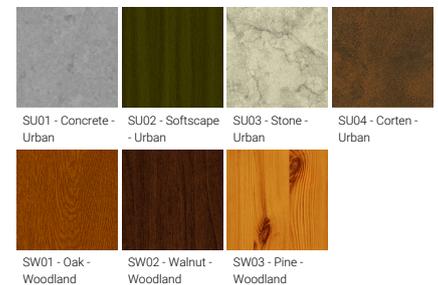

FORREY

Technical information

	Model number	Light source	Power	Lumen	Optic	CCT / CRI	Dimming type	Weight	
Ø160 - 1129 mm									
FORREY 5	FOR-10051	1 COB	45 W	5338 - 6113 lm	T2 [138°x99°], T3 [137°x107°], T4 [133°x107°], T5 [142°x124°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	9.0 kg	
Ø160 - 1129 mm - With louver									
FORREY 6	FOR-10052	1 COB	45 W	4970 - 5431 lm	T2 [138°x99°], T3 [137°x107°], T4 [131°x104°], T5 [142°x124°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	7.5 kg	
Ø160 - 1129 mm - With louver & opal diffuser									
FORREY 6	FOR-10072	160 LED	50 W	3279 - 3526 lm	G [360°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	11.2 kg	
Ø160 - 1129 mm - With opal diffuser									
FORREY 5	FOR-10071	160 LED	50 W	4237 - 4556 lm	G [360°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	10.5 kg	
Ø160 - 1129 mm - With shade									
FORREY 1	FOR-10011	1 COB	48 W	4012 - 4755 lm	T2 [137°x101°], T3 [132°x106°], T4 [131°x116°], T5 [74°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	10.5 kg	
Ø160 - 1129 mm - With shade & louver									
FORREY 2	FOR-10012	1 COB	48 W	3235 - 3527 lm	T2 [140°x100°], T3 [132°x103°], T4 [137°x117°], T5 [73°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	8.9 kg	
Ø160 - 1129 mm - With shade & louver & opal diffuser									
FORREY 2	FOR-10032	160 LED	50 W	3126 - 3361 lm	G [360°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	12.7 kg	
Ø160 - 1129 mm - With shade & opal diffuser									
FORREY 1	FOR-10031	160 LED	50 W	4036 - 4340 lm	G [360°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	12.0 kg	
Ø160 - 824 mm									
FORREY 5	FOR-10041	1 COB	45 W	5338 - 6113 lm	T2 [138°x99°], T3 [137°x107°], T4 [133°x107°], T5 [142°x124°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	8.3 kg	
Ø160 - 824 mm - With louver									
FORREY 6	FOR-10042	1 COB	45 W	4970 - 5431 lm	T2 [138°x99°], T3 [137°x107°], T4 [131°x104°], T5 [142°x124°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	6.7 kg	
Ø160 - 824 mm - With louver & opal diffuser									
FORREY 6	FOR-10062	160 LED	50 W	3279 - 3526 lm	G [360°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	9.7 kg	
Ø160 - 824 mm - With opal diffuser									
FORREY 5	FOR-10061	160 LED	50 W	4237 - 4556 lm	G [360°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	12.0 kg	
Ø160 - 824 mm - With shade									
FORREY 1	FOR-10001	1 COB	48 W	4012 - 4755 lm	T2 [137°x101°], T3 [132°x106°], T4 [131°x116°], T5 [74°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	9.7 kg	

FORREY

Ø160 - 824 mm - With shade & louver									
FORREY 2	FOR-10002	1 COB	48 W	3234 - 3527 lm	T2 [140°x100°], T3 [132°x103°], T4 [137°x117°], T5 [73°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	8.2 kg	
Ø160 - 824 mm - With shade & louver & opal diffuser									
FORREY 2	FOR-10022	160 LED	50 W	3126 - 3361 lm	G [360°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	11.2 kg	
Ø160 - 824 mm - With shade & opal diffuser									
FORREY 1	FOR-10021	160 LED	50 W	4036 - 4340 lm	G [360°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	10.5 kg	
Ø186 - 1179 mm									
FORREY 7	FOR-10131	1 COB	48 W	4221 - 4780 lm	T2 [142°x87°], T3 [131°x100°], T4 [128°x118°], T5 [143°x89°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	11.7 kg	
Ø186 - 1179 mm - With integrated security core (Anti-traffic)									
FORREY 7	FOR-10131-SB	160 LED	48 W	4221 - 4780 lm	T2 [142°x87°], T3 [131°x100°], T4 [128°x118°], T5 [143°x89°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	37.5 kg	
Ø186 - 1179 mm - With louver									
FORREY 8	FOR-10132	1 COB	48 W	3191 - 3711 lm	T2 [140°x100°], T3 [132°x103°], T4 [137°x117°], T5 [73°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	12.5 kg	
Ø186 - 1179 mm - With louver & opal diffuser									
FORREY 8	FOR-10152	160 LED	50 W	3279 - 3526 lm	G [360°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	14.9 kg	
Ø186 - 1179 mm - With louver & opal diffuser - With integrated security core (Anti-traffic)									
FORREY 8	FOR-10152-SB	160 LED	50 W	3279 - 3526 lm	G [360°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	40.9 kg	
Ø186 - 1179 mm - With louver - With integrated security core (Anti-traffic)									
FORREY 8	FOR-10132-SB	160 LED	48 W	3191 - 3711 lm	T2 [140°x100°], T3 [132°x103°], T4 [137°x117°], T5 [73°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	39.0 kg	
Ø186 - 1179 mm - With opal diffuser									
FORREY 7	FOR-10151	160 LED	50 W	4237 - 4556 lm	G [360°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	13.2 kg	
Ø186 - 1179 mm - With opal diffuser - With integrated security core (Anti-traffic)									
FORREY 7	FOR-10151-SB	160 LED	50 W	4237 - 4556 lm	G [360°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	39.2 kg	
Ø186 - 1179 mm - With shade									
FORREY 3	FOR-10091	1 COB	48 W	4012 - 4755 lm	T2 [137°x101°], T3 [132°x106°], T4 [131°x116°], T5 [74°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	13.2 kg	
Ø186 - 1179 mm - With shade & louver									
FORREY 4	FOR-10092	1 COB	48 W	3235 - 3527 lm	T2 [140°x100°], T3 [132°x103°], T4 [137°x117°], T5 [73°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	14.0 kg	
Ø186 - 1179 mm - With shade & louver & opal diffuser									
FORREY 4	FOR-10112	160 LED	50 W	3126 - 3361 lm	G [360°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	16.4 kg	
Ø186 - 1179 mm - With shade & louver & opal diffuser - With integrated security core (Anti-traffic)									

FORREY

FORREY 4	FOR-10112-SB	1 COB	50 W	lm	G [360°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	38.5 kg	
Ø186 - 1179 mm - With shade & opal diffuser									
FORREY 3	FOR-10111	160 LED	50 W	4036 - 4340 lm	G [360°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	14.7 kg	
Ø186 - 1179 mm - With shade & opal diffuser - With integrated security core (Anti-traffic)									
FORREY 3	FOR-10111-SB	1 COB	50 W	4036 - 4340 lm	G [360°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	38.0 kg	
Ø186 - 1179 mm - With shade - With integrated security core (Anti-traffic)									
FORREY 3	FOR-10091-SB	1 COB	48 W	4012 - 4755 lm	T2 [137°x101°], T3 [132°x106°], T4 [131°x116°], T5 [74°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	36.0 kg	
Ø186 - 1179mm - With shade & louver - With integrated security core (Anti-traffic)									
FORREY 4	FOR-10092-SB	1 COB	48 W	3235 - 3527 lm	T2 [140°x100°], T3 [132°x103°], T4 [137°x117°], T5 [73°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	37.0 kg	
Ø186 - 874 mm									
FORREY 7	FOR-10121	1 COB	48 W	4221 - 4780 lm	T2 [142°x87°], T3 [131°x100°], T4 [128°x118°], T5 [143°x89°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	10.0 kg	
Ø186 - 874 mm - With integrated security core (Anti-traffic)									
FORREY 7	FOR-10121-SB	160 LED	48 W	4221 - 4780 lm	T2 [142°x87°], T3 [131°x100°], T4 [128°x118°], T5 [143°x89°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	32.7 kg	
Ø186 - 874 mm - With louver									
FORREY 8	FOR-10122	1 COB	48 W	3191 - 3711 lm	T2 [140°x100°], T3 [132°x103°], T4 [137°x117°], T5 [73°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	10.8 kg	
Ø186 - 874 mm - With louver & opal diffuser									
FORREY 8	FOR-10142	160 LED	50 W	3279 - 3526 lm	G [360°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	13.0 kg	
Ø186 - 874 mm - With louver & opal diffuser - With integrated security core (Anti-traffic)									
FORREY 8	FOR-10142-SB	160 LED	50 W	3279 - 3526 lm	G [360°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	36.1 kg	
Ø186 - 874 mm - With louver - With integrated security core (Anti-traffic)									
FORREY 8	FOR-10122-SB	160 LED	48 W	3191 - 3711 lm	T2 [140°x100°], T3 [132°x103°], T4 [137°x117°], T5 [73°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	34.2 kg	
Ø186 - 874 mm - With opal diffuser									
FORREY 7	FOR-10141	160 LED	50 W	4237 - 4556 lm	G [360°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	11.5 kg	
Ø186 - 874 mm - With opal diffuser - With integrated security core (Anti-traffic)									
FORREY 7	FOR-10141-SB	160 LED	50 W	4237 - 4556 lm	G [360°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	34.4 kg	
Ø186 - 874 mm - With shade									
FORREY 3	FOR-10081	1 COB	48 W	4012 - 4755 lm	T2 [137°x101°], T3 [132°x106°], T4 [131°x116°], T5 [74°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	11.5 kg	
Ø186 - 874 mm - With shade & louver									

FORREY

FORREY 4	FOR-10082	1 COB	48 W	3234 - 3527 lm	T2 [140°x100°], T3 [132°x103°], T4 [137°x117°], T5 [73°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	12.3 kg	
Ø186 - 874 mm - With shade & louver & opal diffuser									
FORREY 4	FOR-10102	160 LED	50 W	3126 - 3361 lm	G [360°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	14.5 kg	
Ø186 - 874 mm - With shade & louver & opal diffuser - With integrated security core (Anti-traffic)									
FORREY 4	FOR-10102-SB	1 COB	50 W	lm	G [360°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	34.0 kg	
Ø186 - 874 mm - With shade & louver - With integrated security core (Anti-traffic)									
FORREY 4	FOR-10082-SB	1 COB	48 W	3234 - 3527 lm	T2 [140°x100°], T3 [132°x103°], T4 [137°x117°], T5 [73°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	32.0 kg	
Ø186 - 874 mm - With shade & opal diffuser									
FORREY 3	FOR-10101	160 LED	50 W	4036 - 4340 lm	G [360°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	13.0 kg	
Ø186 - 874 mm - With shade & opal diffuser - With integrated security core (Anti-traffic)									
FORREY 3	FOR-10101-SB	1 COB	50 W	4036 - 4340 lm	G [360°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	32.0 kg	
Ø186 - 874 mm - With shade - With integrated security core (Anti-traffic)									
FORREY 3	FOR-10081-SB	1 COB	48 W	4012 - 4755 lm	T2 [137°x101°], T3 [132°x106°], T4 [131°x116°], T5 [74°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	31.2 kg	

Accessory

	 Anchor bolt A10291	 Anchor bolt A10391	 DALI Control System Control-DALI	 Power connection box (IP65) modification upon request POWER-BOX-IP65
FOR-10001	•		•	
FOR-10002	•		•	
FOR-10011	•		•	•
FOR-10012	•		•	•
FOR-10021	•		•	
FOR-10022	•		•	
FOR-10031	•		•	•
FOR-10032	•		•	•
FOR-10041	•		•	
FOR-10042	•		•	
FOR-10051	•		•	•
FOR-10052	•		•	•
FOR-10061	•		•	
FOR-10062	•		•	
FOR-10071	•		•	•
FOR-10072	•		•	•
FOR-10081		•	•	
FOR-10081-SB			•	
FOR-10082		•	•	
FOR-10082-SB			•	
FOR-10091		•	•	•
FOR-10091-SB			•	

We reserve the right to make technical and design changes.

01:17, 05-12-2025



<https://www.ligman.com/forrey-bollards-fo-bo3/>

THAILAND
LIGMAN Lighting Co.,Ltd.
17/2 Moo 4, Monthong, Bang Nam Prio, 24150 Chachoengsao - Thailand
info@ligman.com



FORREY

FOR-10092	•	•	•
FOR-10092-SB		•	
FOR-10101	•	•	
FOR-10101-SB		•	•
FOR-10102	•	•	
FOR-10102-SB		•	•
FOR-10111	•	•	•
FOR-10111-SB		•	•
FOR-10112	•	•	•
FOR-10112-SB		•	•
FOR-10121	•	•	
FOR-10121-SB		•	
FOR-10122	•	•	
FOR-10122-SB		•	
FOR-10131	•	•	•
FOR-10131-SB		•	
FOR-10132	•	•	•
FOR-10132-SB		•	
FOR-10141	•	•	
FOR-10141-SB		•	•
FOR-10142	•	•	
FOR-10142-SB		•	•
FOR-10151	•	•	•
FOR-10151-SB		•	•
FOR-10152	•	•	•
FOR-10152-SB		•	•

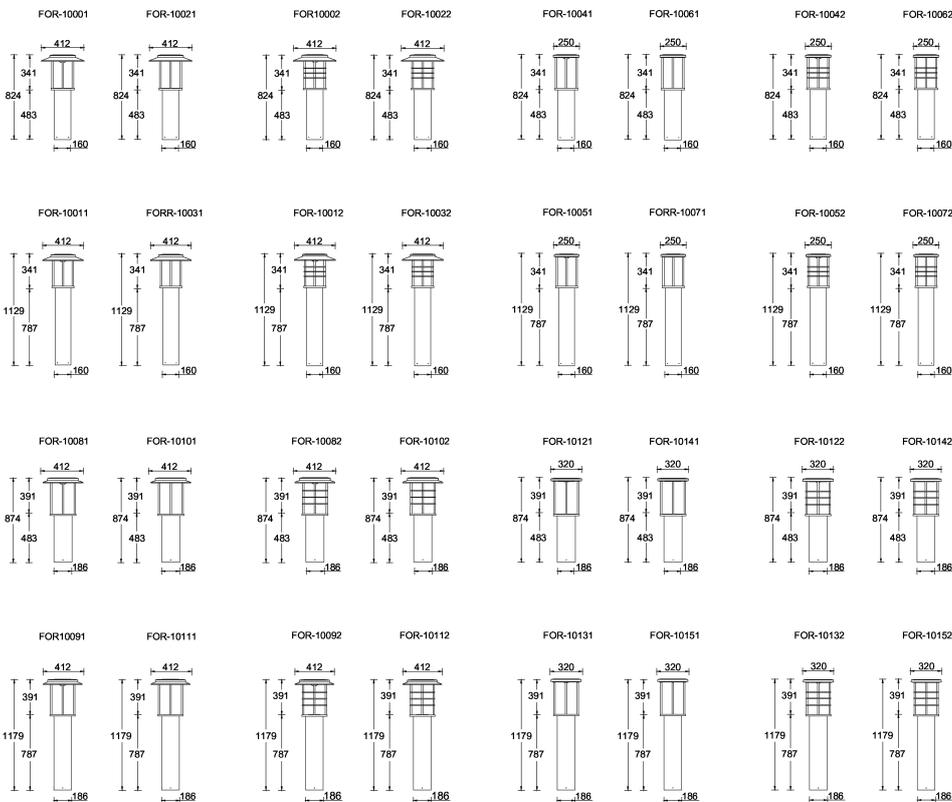

We reserve the right to make technical and design changes.

01:17, 05-12-2025

<https://www.ligman.com/forrey-bollards-fo-bo3/>

THAILAND
LIGMAN Lighting Co.,Ltd.
17/2 Moo 4, Monthong, Bang Nam Prio, 24150 Chachoengsao - Thailand
info@ligman.com




FORREY

FORREY
Post top luminaires

High efficiency meets the classic form factor. Complete range of decorative lighting solutions packing a punch with multiple beam distributions and superior efficacies.


<https://www.ligman.com/forrey-post-top-luminaires-fo-po3/>

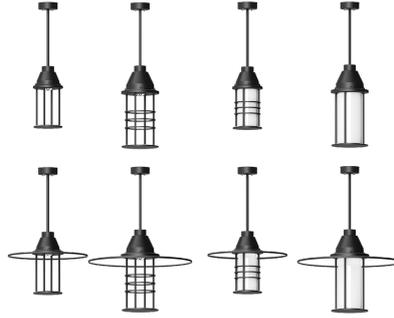

FORREY
Pendant luminaires

High efficiency meets the classic form factor. Complete range of decorative lighting solutions packing a punch with multiple beam distributions and superior efficacies.

<https://www.ligman.com/forrey-pendant-luminaires-fo-pe3/>



FORREY
Surface facade luminaires

High efficiency meets the classic form factor. Complete range of decorative lighting solutions packing a punch with multiple beam distributions and superior efficacies.

<https://www.ligman.com/forrey-surface-facade-luminaires-fo-su3/>