


# FORREY



High efficiency meets the classic form factor. Complete range of decorative lighting solutions packing a punch with multiple beam distributions and superior efficacies.

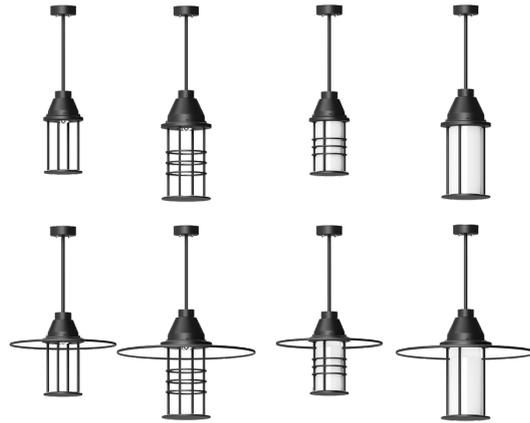


microPrim™


## Luminaire Structure

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Models with shade will have colour white coating at inside of shade luminaire and outside surface coating according to colour of luminaire
- Two cable entries for through wiring
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Downward light distribution type without external optical lenses
- With or without opal UV-stabilised polycarbonate diffuser or high-efficiency PMMA lens
- Integral control gear
- FORREY luminaires with opal lens and colder than 3000K CCT do not meet the IDA certification requirements


## Feature

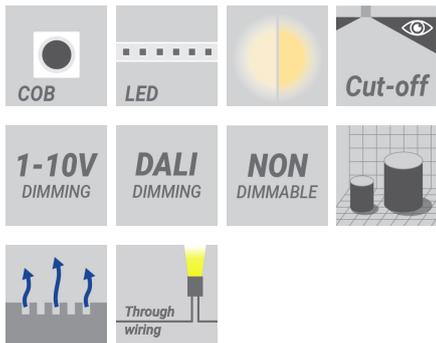


## Optic

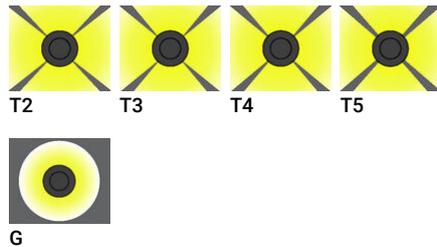

## Product colour

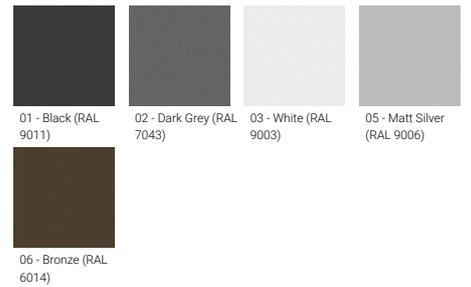

## Special finishes upon request

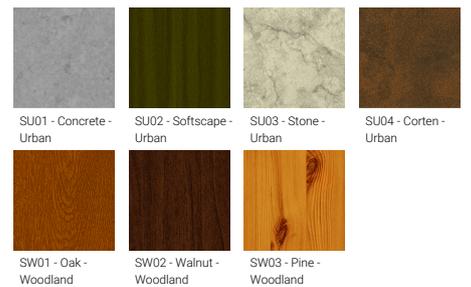

# FORREY

## Technical information

	Model number	Light source	Power	Lumen	Optic	CCT / CRI	Dimming type	Weight	
<b>Ø224 - 1027 mm - With louver &amp; opal diffuser</b>									
	FORREY 30	<b>FOR-95032</b>	160 LED	50 W	3279 - 3526 lm	G [360°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	8.2 kg
<b>Ø224 - 1027 mm - With opal diffuser</b>									
	FORREY 29	<b>FOR-95031</b>	160 LED	50 W	4237 - 4556 lm	G [360°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	7.5 kg
<b>Ø250 - 1046 mm</b>									
	FORREY 29	<b>FOR-95021</b>	1 COB	48 W	4221 - 4780 lm	T2 [142°x87°], T3 [131°x100°], T4 [128°x118°], T5 [161°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	6.2 kg
<b>Ø250 - 1046 mm - With louver</b>									
	FORREY 30	<b>FOR-95022</b>	1 COB	48 W	3191 - 3711 lm	T2 [140°x100°], T3 [132°x103°], T4 [137°x117°], T5 [73°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	6.8 kg
<b>Ø268 - 1203 mm - With louver &amp; opal diffuser</b>									
	FORREY 32	<b>FOR-95072</b>	180 LED	60 W	3469 - 4053 lm	G [360°]	3000K, 4000K	On/Off, 1-10V, DALI	12.0 kg
<b>Ø268 - 1203 mm - With opal diffuser</b>									
	FORREY 31	<b>FOR-95071</b>	180 LED	60 W	4234 - 4553 lm	G [360°]	3000K, 4000K	On/Off, 1-10V, DALI	11.1 kg
<b>Ø320 - 1224 mm</b>									
	FORREY 31	<b>FOR-95061</b>	1 COB	70 W	7196 - 8415 lm	T2 [145°x87°], T3 [141°x91°], T4 [134°x118°], T5 [145°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	9.6 kg
<b>Ø320 - 1224 mm - With louver</b>									
	FORREY 32	<b>FOR-95062</b>	1 COB	70 W	5976 - 6603 lm	T2 [145°x84°], T3 [126°x106°], T4 [133°x116°], T5 [163°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	10.0 kg
<b>Ø660 - 1027 mm - With shade &amp; louver &amp; opal diffuser</b>									
	FORREY 26	<b>FOR-95012</b>	160 LED	50 W	3046 - 3275 lm	G [360°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	10.4 kg
<b>Ø660 - 1027 mm - With shade &amp; opal diffuser</b>									
	FORREY 25	<b>FOR-95011</b>	160 LED	50 W	3903 - 4197 lm	G [360°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	9.7 kg
<b>Ø660 - 1046 mm - With shade</b>									
	FORREY 25	<b>FOR-95001</b>	1 COB	48 W	4247 - 4813 lm	T2 [143°x86°], T3 [132°x99°], T4 [131°x117°], T5 [119°x134°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	8.3 kg
<b>Ø660 - 1046 mm - With shade &amp; louver</b>									
	FORREY 26	<b>FOR-95002</b>	1 COB	48 W	3413 - 3749 lm	T2 [143°x84°], T3 [141°x89°], T4 [129°x115°], T5 [143°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	9.0 kg
<b>Ø880 - 1203 mm - With shade &amp; louver &amp; opal diffuser</b>									
	FORREY 28	<b>FOR-95052</b>	180 LED	60 W	3469 - 4053 lm	G [360°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	15.9 kg
<b>Ø880 - 1203 mm - With shade &amp; opal diffuser</b>									
	FORREY 27	<b>FOR-95051</b>	180 LED	60 W	4234 - 4553 lm	G [360°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	15.0 kg

# FORREY

Ø880 - 1224 mm - With shade								
FORREY 27	<b>FOR-95041</b>	1 COB	70 W	6476 - 7522 lm	T2 [145°x87°], T3 [141°x91°], T4 [134°x118°], T5 [145°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	13.5 kg
Ø880 - 1224 mm - With shade & louver								
FORREY 28	<b>FOR-95042</b>	1 COB	70 W	5976 - 6603 lm	T2 [145°x84°], T3 [126°x106°], T4 [133°x116°], T5 [163°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	14.3 kg


## Accessory



DALI Control System  
**Control-DALI**

FOR-95001	•
FOR-95002	•
FOR-95011	•
FOR-95012	•
FOR-95021	•
FOR-95022	•
FOR-95031	•
FOR-95032	•
FOR-95041	•
FOR-95042	•
FOR-95051	•
FOR-95052	•
FOR-95061	•
FOR-95062	•
FOR-95071	•
FOR-95072	•

**FORREY**

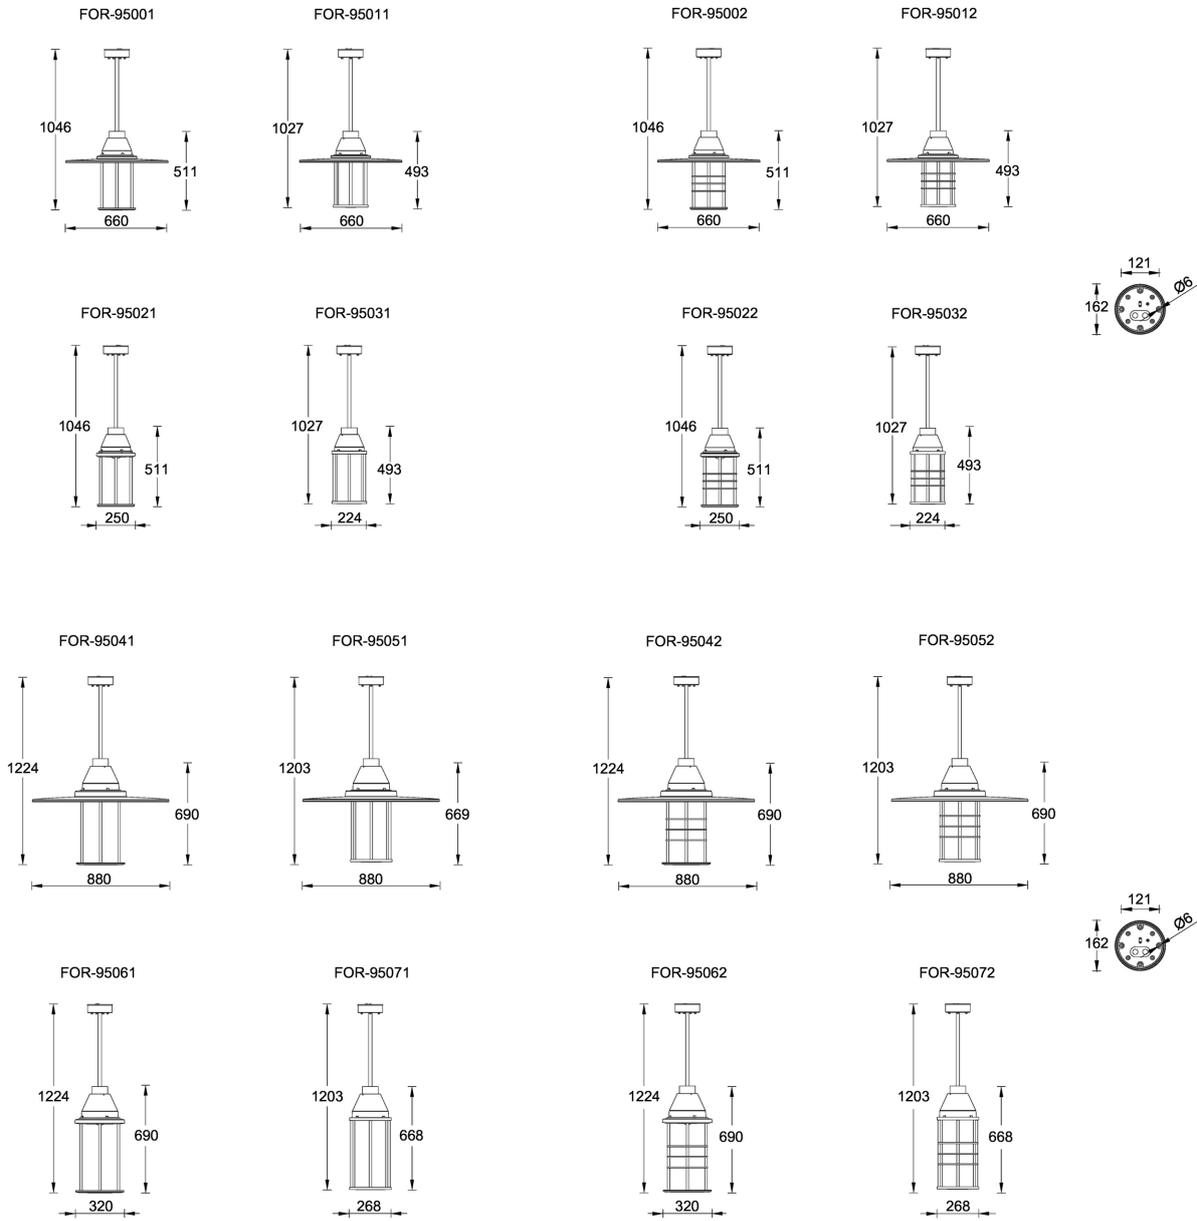

**FORREY**


---

FORREY  
**Post top luminaires**

---

High efficiency meets the classic form factor. Complete range of decorative lighting solutions packing a punch with multiple beam distributions and superior efficacies.

<https://www.ligman.com/forrey-post-top-luminaires-fo-po3/>





---

FORREY  
**Bollards**

---

High efficiency meets the classic form factor. Complete range of decorative lighting solutions packing a punch with multiple beam distributions and superior efficacies.

<https://www.ligman.com/forrey-bollards-fo-bo3/>




---

FORREY  
**Surface facade luminaires**

---

High efficiency meets the classic form factor. Complete range of decorative lighting solutions packing a punch with multiple beam distributions and superior efficacies.

<https://www.ligman.com/forrey-surface-facade-luminaires-fo-su3/>