

FORREY




High efficiency meets the classic form factor. Complete range of decorative lighting solutions packing a punch with multiple beam distributions and superior efficacies.




Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Extruded aluminium column
- Models with shade will have colour white coating at inside of shade luminaire and outside surface coating according to colour of luminaire
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- With or without opal UV-stabilised polycarbonate diffuser or high-efficiency PMMA lens
- FORREY luminaires with opal lens and colder than 3000K CCT do not meet the IDA certification requirements

Feature

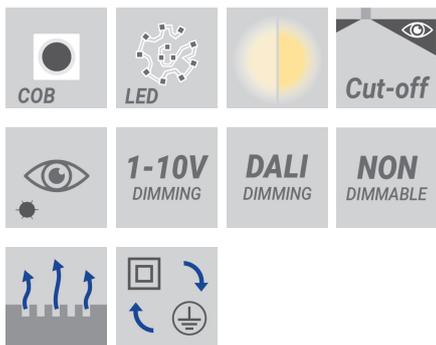

Optic

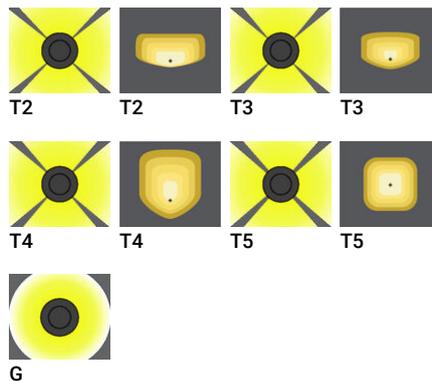

Product colour



Special finishes upon request



FORREY

Technical information

	Model number	Light source	Power	Lumen	Optic	CCT / CRI	Dimming type	Weight	
Top Ø250 mm									
FORREY 13	FOR-20021	1 COB	48 W	4221 - 4780 lm	T2 [142°x87°], T3 [131°x100°], T4 [128°x118°], T5 [161°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	9.3 kg	
Top Ø250 mm - With louver									
FORREY 14	FOR-20022	1 COB	48 W	3191 - 3711 lm	T2 [140°x100°], T3 [132°x103°], T4 [137°x117°], T5 [73°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	10.6 kg	
Top Ø250 mm - With louver & opal diffuser									
FORREY 14	FOR-20032	160 LED	50 W	3279 - 3526 lm	G [360°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	10.9 kg	
Top Ø250 mm - With opal diffuser									
FORREY 13	FOR-20031	160 LED	50 W	4237 - 4556 lm	G [360°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	10.2 kg	
Top Ø320 mm									
FORREY 15	FOR-20061	1 COB	70 W	7196 - 8415 lm	T2 [145°x87°], T3 [141°x91°], T4 [134°x118°], T5 [145°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	13.8 kg	
Top Ø320 mm - With louver									
FORREY 16	FOR-20062	1 COB	70 W	5976 - 6603 lm	T2 [145°x84°], T3 [126°x106°], T4 [133°x116°], T5 [163°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	15.0 kg	
Top Ø320 mm - With louver & opal diffuser									
FORREY 16	FOR-20072	180 LED	60 W	3469 - 4053 lm	G [360°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	16.1 kg	
Top Ø320 mm - With opal diffuser									
FORREY 15	FOR-20071	180 LED	60 W	4234 - 4553 lm	G [360°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	15.2 kg	
Top Ø660 mm - With shade									
FORREY 9	FOR-20001	1 COB	48 W	4247 - 4813 lm	T2 [143°x86°], T3 [132°x99°], T4 [131°x117°], T5 [119°x134°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	11.6 kg	
Top Ø660 mm - With shade & louver									
FORREY 10	FOR-20002	1 COB	48 W	3413 - 3749 lm	T2 [143°x84°], T3 [141°x89°], T4 [129°x115°], T5 [143°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	12.3 kg	
Top Ø660 mm - With shade & louver & opal diffuser									
FORREY 10	FOR-20012	160 LED	50 W	3046 - 3275 lm	G [360°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	13.1 kg	
Top Ø660 mm - With shade & opal diffuser									
FORREY 9	FOR-20011	160 LED	50 W	3903 - 4197 lm	G [360°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	12.4 kg	
Top Ø880 mm - With shade									
FORREY 11	FOR-20041	1 COB	70 W	6476 - 7522 lm	T2 [145°x87°], T3 [141°x91°], T4 [134°x118°], T5 [145°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	17.7 kg	

We reserve the right to make technical and design changes.

09:37, 26-02-2026

<https://www.ligman.com/forrey-post-top-luminaires-fo-p03/>

THAILAND
 LIGMAN Lighting Co.,Ltd.
 17/2 Moo 4, Monthong, Bang Nam Prio, 24150 Chachoengsao - Thailand
info@ligman.com



FORREY

Top Ø880 mm - With shade & louver									
FORREY 12	FOR-20042	1 COB	70 W	5976 - 6603 lm	T2 [145°x84°], T3 [126°x106°], T4 [133°x116°], T5 [163°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	18.8 kg	
Top Ø880 mm - With shade & louver & opal diffuser									
FORREY 12	FOR-20052	180 LED	60 W	3469 - 4053 lm	G [360°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	19.9 kg	
Top Ø880 mm - With shade & opal diffuser									
FORREY 11	FOR-20051	180 LED	60 W	4234 - 4553 lm	G [360°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	18.8 kg	


















Accessory



DALI Control System
Control-DALI

FOR-20001	•
FOR-20002	•
FOR-20011	•
FOR-20012	•
FOR-20021	•
FOR-20022	•
FOR-20031	•
FOR-20032	•
FOR-20041	•
FOR-20042	•
FOR-20051	•
FOR-20052	•
FOR-20061	•
FOR-20062	•
FOR-20071	•
FOR-20072	•

FORREY




FORREY

FORREY
Bollards

High efficiency meets the classic form factor. Complete range of decorative lighting solutions packing a punch with multiple beam distributions and superior efficacies.


<https://www.ligman.com/forrey-bollards-fo-bo3/>

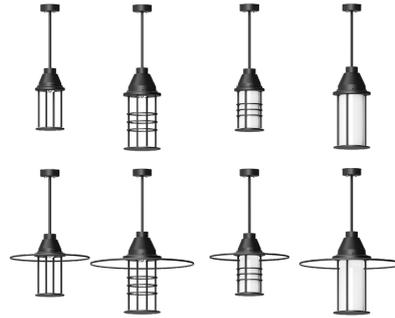

FORREY
Pendant luminaires

High efficiency meets the classic form factor. Complete range of decorative lighting solutions packing a punch with multiple beam distributions and superior efficacies.

<https://www.ligman.com/forrey-pendant-luminaires-fo-pe3/>

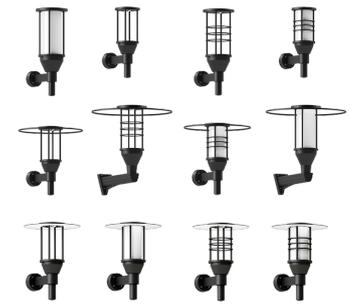

FORREY
Surface facade luminaires

High efficiency meets the classic form factor. Complete range of decorative lighting solutions packing a punch with multiple beam distributions and superior efficacies.

<https://www.ligman.com/forrey-surface-facade-luminaires-fo-su3/>