


FORREY




High efficiency meets the classic form factor. Complete range of decorative lighting solutions packing a punch with multiple beam distributions and superior efficacies.

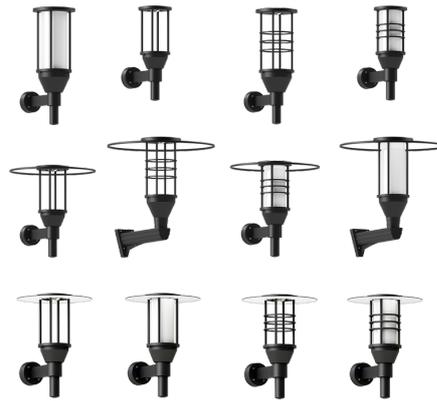


Luminaire Structure

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Models with shade will have colour white coating at inside of shade luminaire and outside surface coating according to colour of luminaire
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- With or without opal UV-stabilised polycarbonate diffuser or high-efficiency PMMA lens
- Integral control gear
- FORREY luminaires with opal lens and colder than 3000K CCT do not meet the IDA certification requirements

Feature

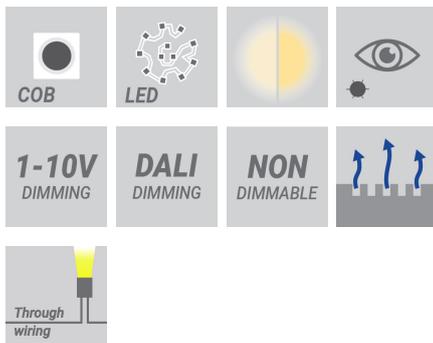


Optic

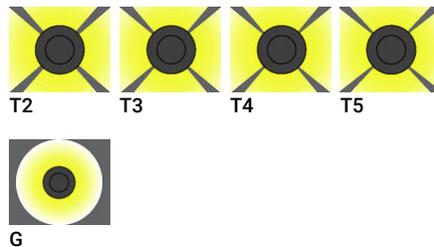

Product colour



Special finishes upon request

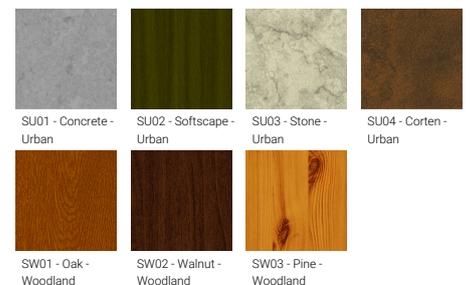

FORREY

Technical information

	Model number	Light source	Power	Lumen	Optic	CCT / CRI	Dimming type	Weight	
Ø250 - 707 mm									
FORREY 21	FOR-30021	1 COB	48 W	4221 - 4780 lm	T2 [142°x87°], T3 [131°x100°], T4 [128°x118°], T5 [161°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	7.4 kg	
Ø250 - 707 mm - With louver									
FORREY 22	FOR-30022	1 COB	48 W	3191 - 3711 lm	T2 [140°x100°], T3 [132°x103°], T4 [137°x117°], T5 [73°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	8.1 kg	
Ø250 - 707 mm - With louver & opal diffuser									
FORREY 22	FOR-30032	160 LED	50 W	3279 - 3526 lm	G [360°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	9.3 kg	
Ø250 - 707 mm - With opal diffuser									
FORREY 21	FOR-30031	160 LED	50 W	4237 - 4556 lm	G [360°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	8.6 kg	
Ø320 - 885 mm									
FORREY 23	FOR-30061	1 COB	70 W	7196 - 8415 lm	T2 [145°x87°], T3 [141°x91°], T4 [134°x118°], T5 [145°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	11.3 kg	
Ø320 - 885 mm - With louver									
FORREY 24	FOR-30062	1 COB	70 W	5976 - 6603 lm	T2 [145°x84°], T3 [126°x106°], T4 [133°x116°], T5 [163°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	12.3 kg	
Ø320 - 885 mm - With louver & opal diffuser									
FORREY 24	FOR-30072	180 LED	60 W	3469 - 4053 lm	G [360°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	13.0 kg	
Ø320 - 885 mm - With opal diffuser									
FORREY 23	FOR-30071	180 LED	60 W	4234 - 4553 lm	G [360°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	12.3 kg	
Ø508 - 707 mm - With shade									
FORREY 33	FOR-30081	1 COB	48 W	4247 - 4813 lm	T2 [143°x86°], T3 [132°x99°], T4 [131°x117°], T5 [119°x134°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	15.0 kg	
Ø508 - 707 mm - With shade & louver									
FORREY 34	FOR-30082	1 COB	48 W	3413 - 3749 lm	T2 [143°x84°], T3 [141°x89°], T4 [129°x115°], T5 [143°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	15.0 kg	
Ø508 - 707 mm - With shade & louver & opal diffuser									
FORREY 36	FOR-30092	160 LED	50 W	3046 - 3275 lm	G [360°]	3000K, 4000K	On/Off, 1-10V, DALI	15.0 kg	
Ø508 - 707 mm - With shade & opal diffuser									
FORREY 35	FOR-30091	160 LED	50 W	3903 - 4197 lm	G [360°]	3000K, 4000K	On/Off, 1-10V, DALI	15.0 kg	
Ø660 - 707 mm - With shade									

We reserve the right to make technical and design changes.

09:37, 26-02-2026

<https://www.ligman.com/forrey-surface-facade-luminaires-fo-su3/>

THAILAND

LIGMAN Lighting Co.,Ltd.
17/2 Moo 4, Monthong, Bang Nam Prio,
24150 Chachoengsao - Thailand
info@ligman.com



FORREY

FORREY 17	FOR-30001	1 COB	48 W	4247 - 4813 lm	T2 [143°x86°], T3 [132°x99°], T4 [131°x117°], T5 [119°x134°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	9.6 kg	
Ø660 - 707 mm - With shade & louver									
FORREY 18	FOR-30002	1 COB	48 W	3413 - 3749 lm	T2 [143°x84°], T3 [141°x89°], T4 [129°x115°], T5 [143°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	10.3 kg	
Ø660 - 707 mm - With shade & louver & opal diffuser									
FORREY 18	FOR-30012	160 LED	50 W	3046 - 3275 lm	G [360°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	11.5 kg	
Ø660 - 707 mm - With shade & opal diffuser									
FORREY 17	FOR-30011	160 LED	50 W	3903 - 4197 lm	G [360°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	10.8 kg	
Ø880 - 933 mm - With shade									
FORREY 19	FOR-30041	1 COB	70 W	6476 - 7522 lm	T2 [145°x87°], T3 [141°x91°], T4 [134°x118°], T5 [145°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	15.8 kg	
Ø880 - 933 mm - With shade & louver									
FORREY 20	FOR-30042	1 COB	70 W	5976 - 6603 lm	T2 [145°x84°], T3 [126°x106°], T4 [133°x116°], T5 [163°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	16.6 kg	
Ø880 - 933 mm - With shade & louver & opal diffuser									
FORREY 20	FOR-30052	180 LED	60 W	3469 - 4053 lm	G [360°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	17.6 kg	
Ø880 - 933 mm - With shade & opal diffuser									
FORREY 19	FOR-30051	180 LED	60 W	4234 - 4553 lm	G [360°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	16.8 kg	

Accessory



DALI Control System
Control-DALI

FOR-30001	•
FOR-30002	•
FOR-30011	•
FOR-30012	•
FOR-30021	•
FOR-30022	•
FOR-30031	•
FOR-30032	•
FOR-30041	•
FOR-30042	•
FOR-30051	•
FOR-30052	•
FOR-30061	•
FOR-30062	•
FOR-30071	•
FOR-30072	•
FOR-30081	•

We reserve the right to make technical and design changes.

09:37, 26-02-2026

<https://www.ligman.com/forrey-surface-facade-luminaires-fo-su>
3/

THAILAND


LIGMAN Lighting Co.,Ltd.
17/2 Moo 4, Monthong, Bang Nam Prioao,
24150 Chachoengsao - Thailand
info@ligman.com




FORREY

FOR-30082	•
FOR-30091	•
FOR-30092	•


FOR-30001




FOR-30011




FOR-30002




FOR-30012




FOR-30081




FOR-30082




FOR-30021




FOR-30031




FOR-30022




FOR-30032




FOR-30091




FOR-30092




FOR-30041





FOR-30051




FOR-30042




FOR-30052




FOR-30061




FOR-30071



FOR-30062



FOR-30072



FORREY

FORREY
Post top luminaires

High efficiency meets the classic form factor. Complete range of decorative lighting solutions packing a punch with multiple beam distributions and superior efficacies.


<https://www.ligman.com/forrey-post-top-luminaires-fo-po3/>



FORREY
Bollards

High efficiency meets the classic form factor. Complete range of decorative lighting solutions packing a punch with multiple beam distributions and superior efficacies.

<https://www.ligman.com/forrey-bollards-fo-bo3/>

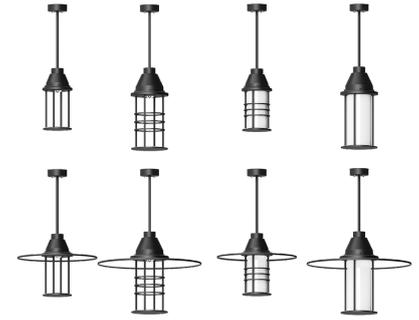

FORREY
Pendant luminaires

High efficiency meets the classic form factor. Complete range of decorative lighting solutions packing a punch with multiple beam distributions and superior efficacies.

<https://www.ligman.com/forrey-pendant-luminaires-fo-pe3/>