


GANDALF




Surface-mounted cost-effective adjustable flood and area lighting. New higher lumen packages and extended family with vast array of flexible performance choices.

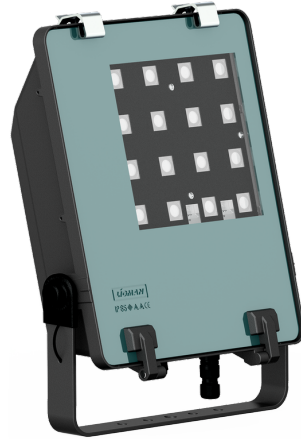


Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry, through wiring upon request
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency PMMA lens
- Clear toughened glass
- Integral control gear
- Hot-dipped galvanised steel mounting bracket allows for ceiling, wall or surface mounting


Feature

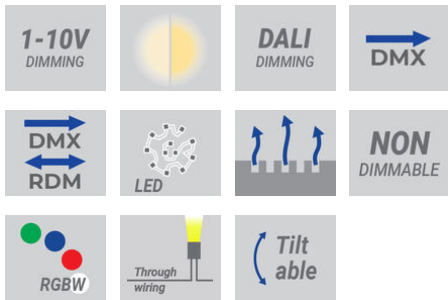


Optic

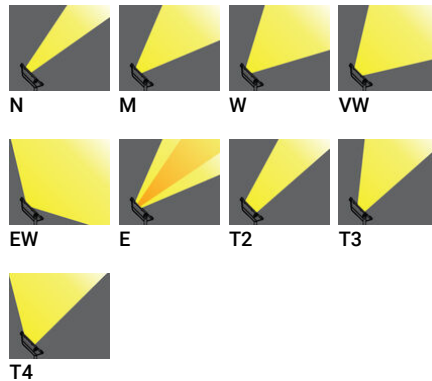

Product colour

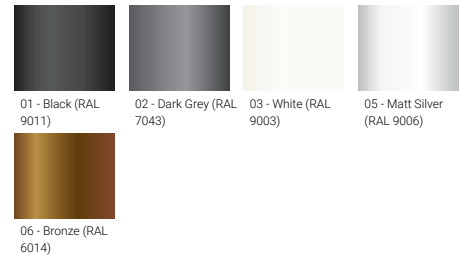

Special finishes upon request

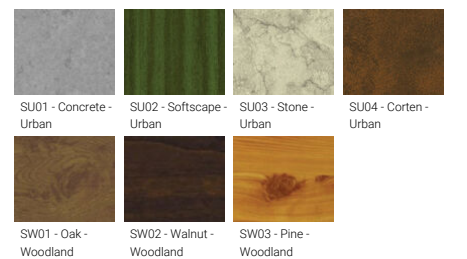

GANDALF

Technical information


	Model number	Light source	Power	Lumen	Optic	CCT / CRI	Dimming type	Weight	
GANDALF 26	GA-51088	24 LED	37 W	4533 - 5207 lm	M [30°], W [52°], EW [108°], T2 [144°x47°], T3 [140°x71°], T4 [100°x81°], ME [139°x59°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	7.0 kg	
GANDALF 26	GA-51089	24 LED	54 W	5777 - 6666 lm	M [30°], W [52°], EW [108°], T2 [144°x47°], T3 [140°x71°], T4 [100°x81°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	7.0 kg	
GANDALF 26	GA-51111	48 LED	54 W	5041 - 6736 lm	N [11°], M [26°], W [52°], VW [66°], EW [101°x114°], T2 [140°x47°], T3 [138°x64°], T4 [99°x77°], ME [136°x38°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	8 kg	
GANDALF 26	GA-51112	2 x 24 LED	74 W	6652 - 8845 lm	N [11°], M [26°], W [52°], VW [66°], EW [101°x114°], T2 [140°x47°], T3 [138°x64°], T4 [99°x77°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	8 kg	
GANDALF 26	GA-51113	2 x 24 LED	92 W	7838 - 10372 lm	N [11°], M [26°], W [52°], VW [66°], EW [101°x114°], T2 [140°x47°], T3 [138°x64°], T4 [99°x77°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	8 kg	
RGBW									
GANDALF 12	GA-51101	16 LED	50 W	1794 - 2148 lm	N [20°], M [35°], E [25°x48°]	RGBW30, RGBW40	DMX, DMX/RDM	7.0 kg	

Accessories


	 Spigot cover for single lantern A50160-SC60	 Spigot cover for single lantern A50176-SC76	 Spigot cover for double lantern A50260-SC60	 Spigot cover for double lantern A50276-SC76	 DALI Control System Control-DALI	 DMX Control System Control-DMX	 DMX/RDM Control System Control-DMX-RDM
GA-51088	•	•	•	•	•		
GA-51089	•	•	•	•	•		
GA-51101	•	•	•	•		•	•
GA-51111	•	•	•	•	•		
GA-51112	•	•	•	•	•		
GA-51113	•	•	•	•	•		

GANDALF**GANDALF 26**


GA-51088, GA-51089

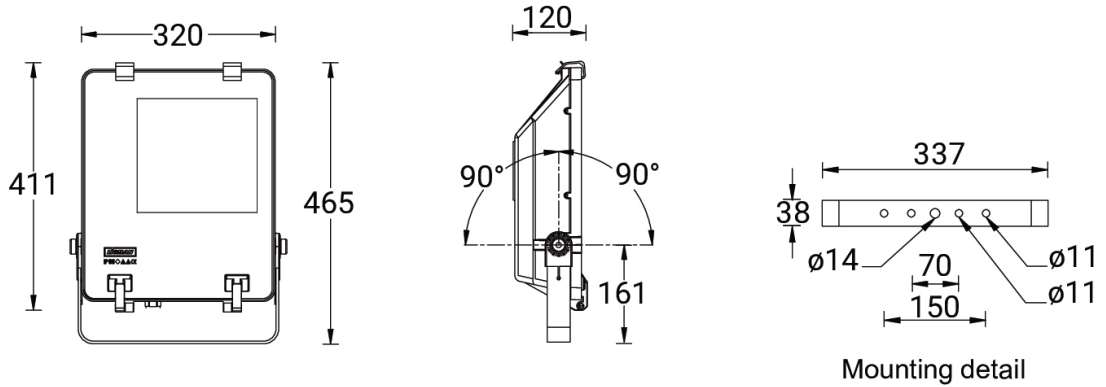**GANDALF 26**

GA-51111, GA-51112, GA-51113

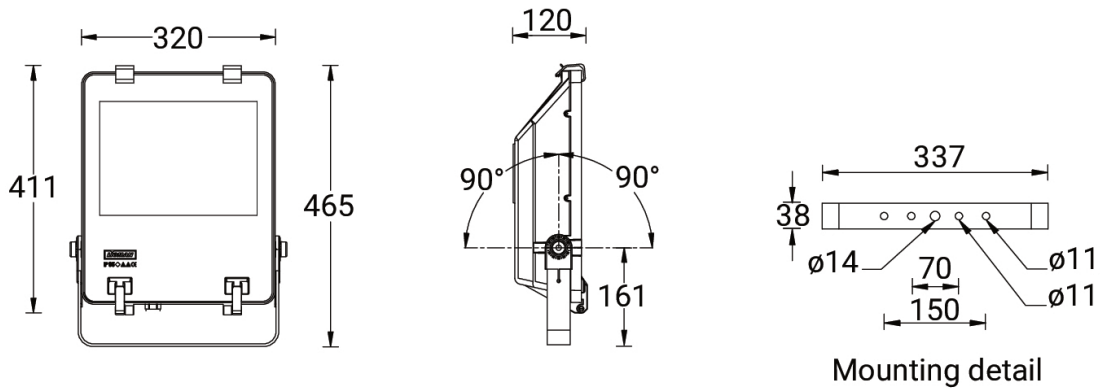**GANDALF 12**

GA-51101

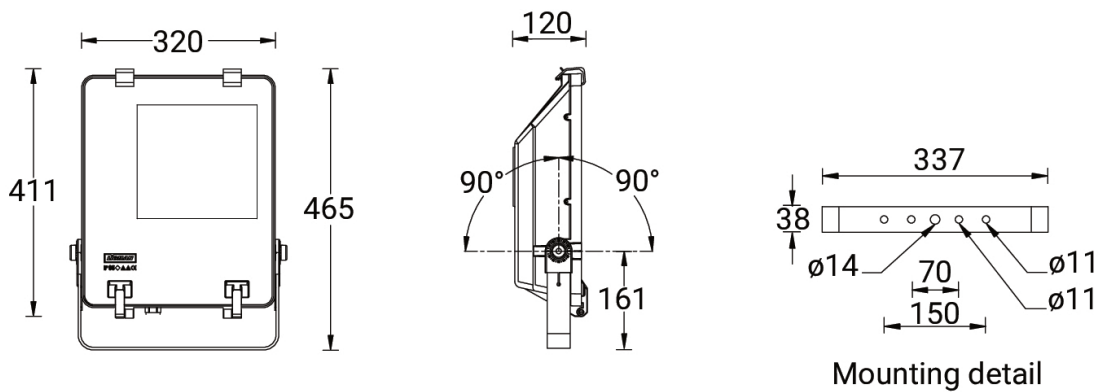

GANDALF

GANDALF
Surface facade luminaires

Surface-mounted cost-effective adjustable flood and area lighting. New higher lumen packages and extended family with a vast array of flexible performance choices.

<https://www.ligman.com/gandalf-surface-facade-luminaires-ga-su3/>



GANDALF
Street & area lighting luminaires

Adjustable column-mounted area floodlight. Powerful, flexible and cost-effective family with a vast array of technical optic choices.

<https://www.ligman.com/gandalf-street-area-lighting-luminaires-ga-st3/>