

HAMILTON



Classic urban neighbourhood wall-mounted luminaire family. Timeless lines coupled with unparalleled build quality, flexibility and performance.



LIGHT CONNECT™


microVOS™ TECHNOLOGY




Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Integral control gear


Feature

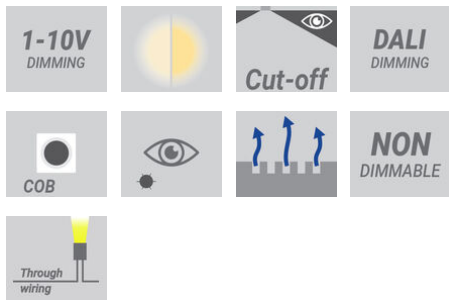


Optic

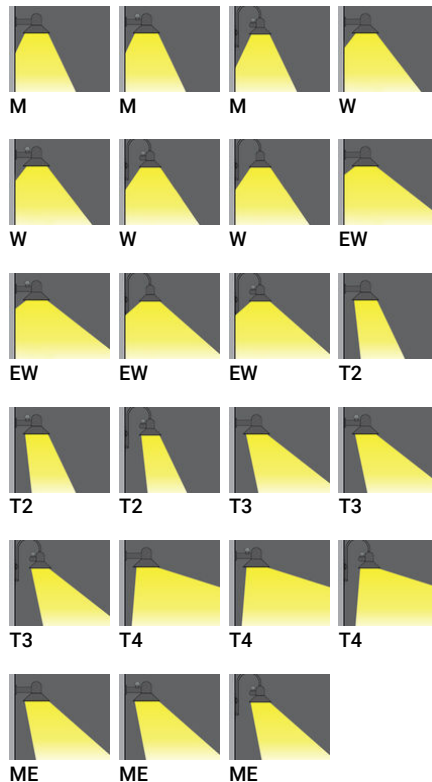

Product colour

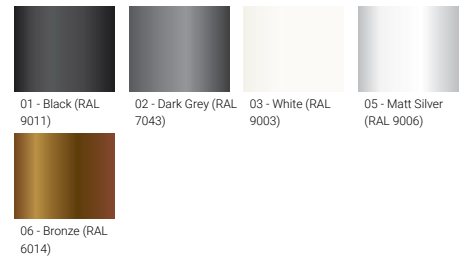

Special finishes upon request

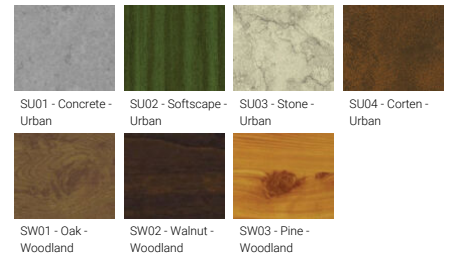

We reserve the right to make technical and design changes.

01:16, 16-04-2024

<https://www.ligman.com/hamilton-surface-facade-luminaires-ham-su2/>

THAILAND





LIGMAN Lighting Co.,Ltd.
17/2 Moo 4, Monthong, Bang Nam Prio,
24150 Chachoengsao - Thailand
info@ligman.com

HAMILTON

Technical information

	Model number	Light source	Power	Lumen	Optic	CCT / CRI	Dimming type	Weight	
1 side									
HAMILTON 5	HAM-30001	24 LED	53 W	6126 - 7027 lm	M [30°], W [57°], EW [110°], T2 [137°x54°], T3 [120°x94°], T4 [103°x70°], ME [138°x60°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	13.88 kg.	
HAMILTON 5	HAM-30002	48 LED	75 W	8395 - 9862 lm	M [30°], W [57°], EW [110°], T2 [137°x54°], T3 [120°x94°], T4 [103°x70°], ME [138°x60°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	14.91 kg.	
LIGHTCONNECT™									
HAMILTON 5	HAM-30001-LC	24 LED	53 W	6126 - 7027 lm	M [30°], W [57°], EW [110°], T2 [137°x54°], T3 [120°x94°], T4 [103°x70°], ME [138°x60°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	13.88 kg.	
HAMILTON 5	HAM-30002-LC	48 LED	75 W	8395 - 9862 lm	M [30°], W [57°], EW [110°], T2 [137°x54°], T3 [120°x94°], T4 [103°x70°], ME [138°x60°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	14.91 kg.	
Shepherd's crook									
HAMILTON 6	HAM-30011	24 LED	53 W	6126 - 7027 lm	M [30°], W [57°], EW [110°], T2 [137°x54°], T3 [120°x94°], T4 [103°x70°], ME [138°x60°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	13.33 kg.	
HAMILTON 6	HAM-30012	48 LED	75 W	8395 - 9862 lm	M [30°], W [57°], EW [110°], T2 [137°x54°], T3 [120°x94°], T4 [103°x70°], ME [138°x60°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	14.18 kg.	
Shepherd's crook - LIGHTCONNECT™									
HAMILTON 6	HAM-30011-LC	24 LED	53 W	00 lm	M [30°], W [57°], EW [110°], T2 [137°x54°], T3 [120°x94°], T4 [103°x70°], ME [138°x60°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	13.33 kg.	
HAMILTON 6	HAM-30012-LC	48 LED	75 W	8395 - 9862 lm	M [30°], W [57°], EW [110°], T2 [137°x54°], T3 [120°x94°], T4 [103°x70°], ME [138°x60°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	14.18 kg.	

Accessories

	 NEMA 7 socket A90891	 Zhaga Book 18 socket (Down) A90991-D	 Zhaga Book 18 socket (Up) A90991-U	 DALI Control System Control-DALI
HAM-30001				•
HAM-30001-LC	•	•	•	•
HAM-30002				•
HAM-30002-LC	•	•	•	•
HAM-30011				•
HAM-30011-LC	•	•	•	•

We reserve the right to make technical and design changes.

01:16, 16-04-2024


<https://www.ligman.com/hamilton-surface-facade-luminaires-ham-su2/>

THAILAND


LIGMAN Lighting Co.,Ltd.
17/2 Moo 4, Monthong, Bang Nam Prioa,
24150 Chachoengsao - Thailand
info@ligman.com

HAMILTON


HAM-30001, HAM-30002

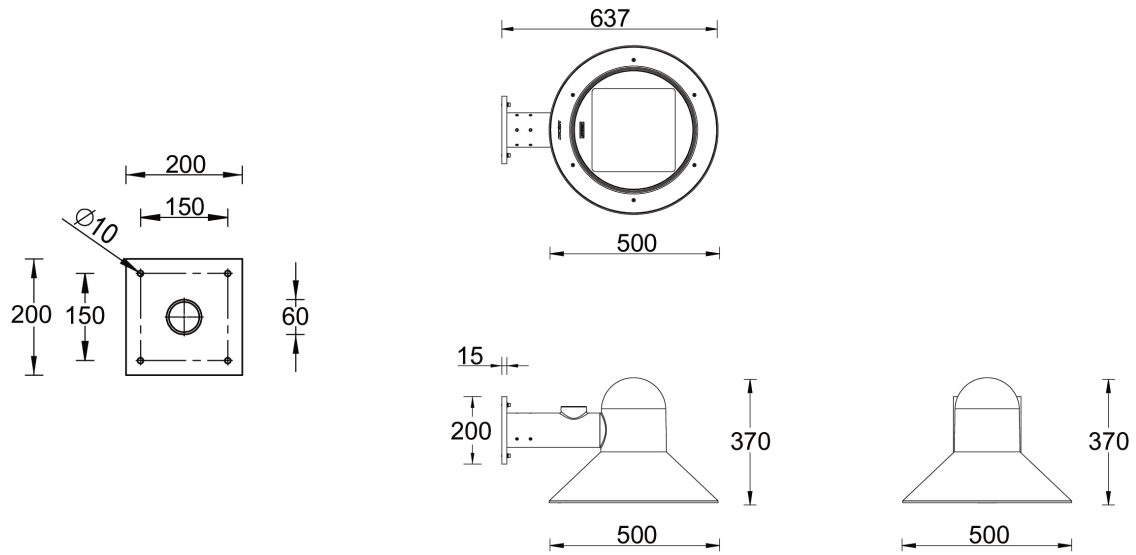

HAM-30011, HAM-30012

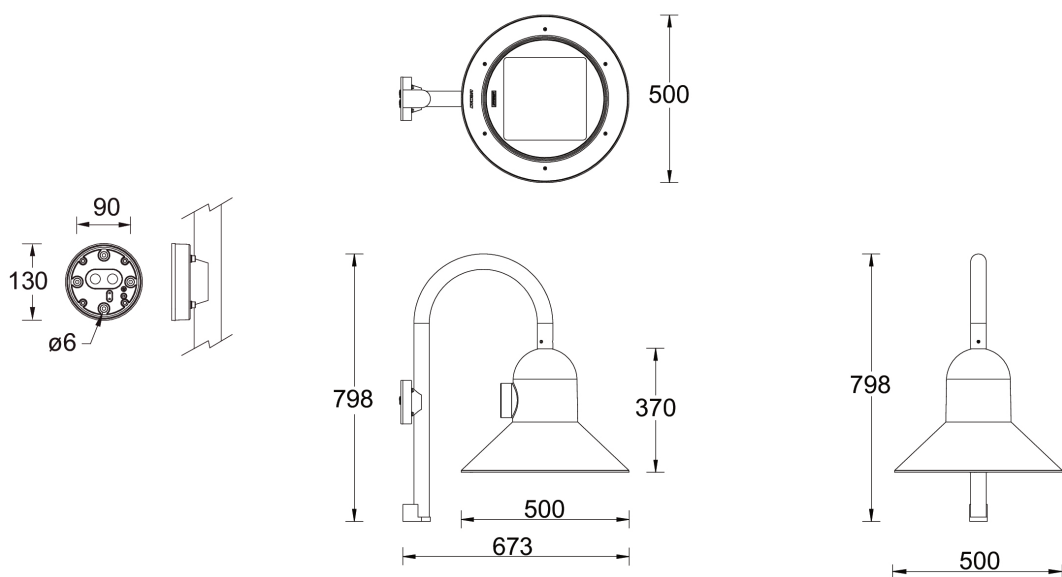

HAMILTON

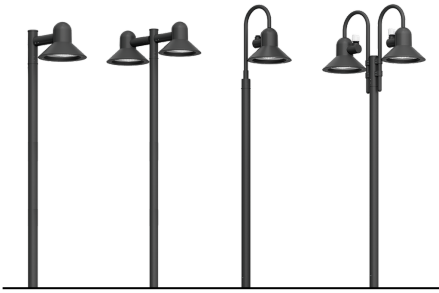

HAMILTON

Street & area lighting luminaires

Classic urban neighbourhood post-top luminaire family. Timeless lines coupled with unparalleled build quality, flexibility and performance.

<https://www.ligman.com/hamilton-street-area-lighting-luminaires-ham-st3/>