


HUGO



Triple directional downlight, part of the modular range. Modular: flexibility in a host of technical configurations.

Luminaire Structure


- Die-cast aluminium housing with powder coating
- Die-cast aluminium heat sink with excellent thermal management
- Propriety lens design for high LOR
- Adjustable: Tilt 30°
- Remote driver is included



Feature



Light symbol



Product colour




HUGO

Technical information


	Model number	Light source	Power	Lumen	Optic	CCT / CRI	Dimming type	Weight
118x357 mm								
HUGO 1	HU-80001	5 LED	27 W	1836 - 2250 lm	M [31°], N [19°], W [48°]	3000K CRI80, 4000K CRI80	DALI, 1-10V, On/Off, Trailing edge dimming	1.42 kg.
HUGO 1	HU-80011	7 LED	36 W	2649 - 3120 lm	M [26°], N [15°], W [35°]	3000K CRI80, 4000K CRI80	DALI, 1-10V, On/Off, Trailing edge dimming	1.67 kg.
147x435 mm								
HUGO 2	HU-80021	9 LED	45 W	3285 - 3849 lm	M [26°], N [15°], W [39°]	3000K CRI80, 4000K CRI80	DALI, 1-10V, On/Off, Trailing edge dimming	2.82 kg.
HUGO 2	HU-80031	12 LED	60 W	4536 - 5157 lm	M [26°], N [15°], W [39°]	3000K CRI80, 4000K CRI80	DALI, 1-10V, On/Off, Trailing edge dimming	3.07 kg.
HUGO 3	HU-80041	18 LED	87 W	7452 - 8511 lm	M [27°], N [15°], W [42°]	3000K CRI80, 4000K CRI80	DALI, 1-10V, On/Off	2.59 kg.

HUGO

Hugo 1

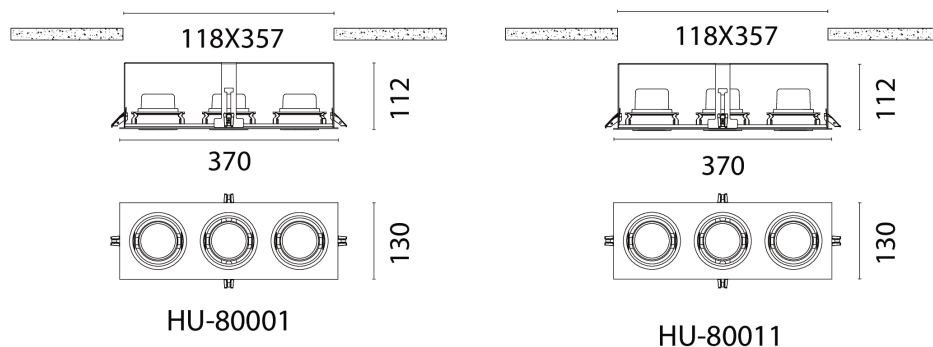

Hugo 2

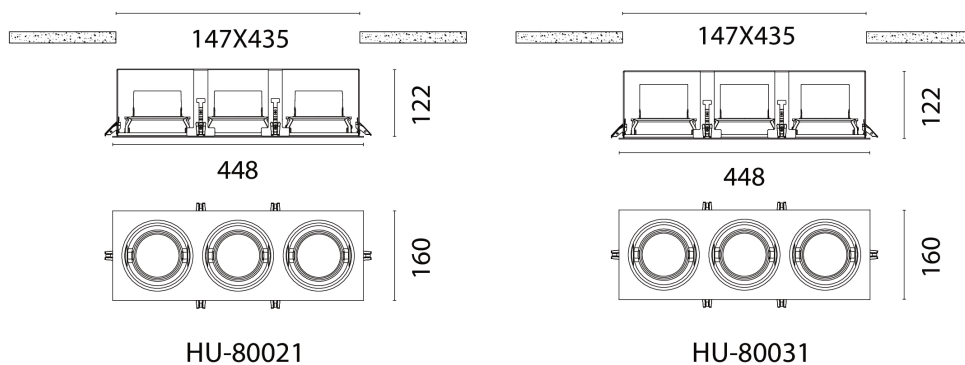

Hugo 3

