


INFINITE



Built to withstand the elements while delivering precision lighting, INFINITE in-ground luminaires are engineered with advanced LED technology for superior outdoor performance. Designed for seamless integration into landscapes, pathways, plazas, and architectural bases, they offer exceptional visual comfort and targeted illumination exactly where it's needed.

With a low-profile, debris-resistant housing, INFINITE ensures long-term reliability and reduced maintenance in high-traffic or weather-exposed environments. The rugged, walk-over-rated construction combines with high-efficiency optics to create striking uplighting effects—from subtle architectural accents to bold vertical illumination.


Whether highlighting structural columns, washing building facades, or guiding pedestrian flow, INFINITE in-ground luminaires provide a durable, design-driven solution that blends form and function in every detail.

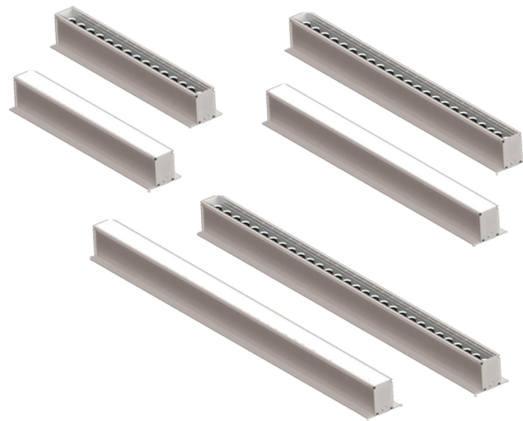


Luminaire Structure

- 6063 High density extruded aluminium alloy
- Two cable entries for through wiring
- Extra clear or diffused polyurethane encapsulated
- Remote driver (not included)

Feature

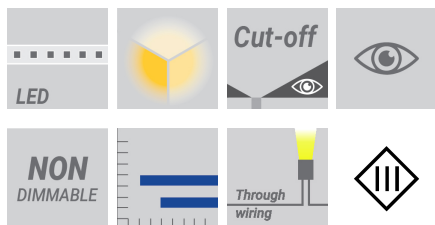

Optic

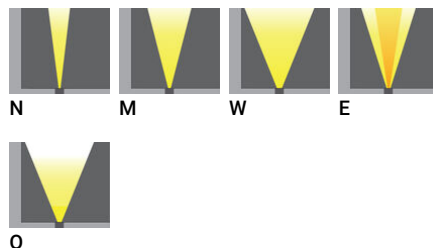

Product colour












INFINITE

Technical information

	Model number	Light source	Power	Lumen	Optic	CCT / CRI	Dimming type	Weight
Diffused - Without remote driver - Constant voltage (CV) 24 V - 40 x 40 x 1020 mm								
INFINITE 4	INF-60013	320 LED	36 W	1368 - 1404 lm	0	2700K CRI90, 3000K CRI90	On/Off, DALI	1.12 kg
Diffused - Without remote driver - Constant voltage (CV) 24 V - 40 x 40 x 420 mm								
INFINITE 4	INF-60011	128 LED	14.4 W	547 - 562 lm	0	2700K CRI90, 3000K CRI90	On/Off, DALI	0.50 kg
Diffused - Without remote driver - Constant voltage (CV) 24 V - 40 x 40 x 620 mm								
INFINITE 4	INF-60012	192 LED	21.6 W	821 - 842 lm	0	2700K CRI90, 3000K CRI90	On/Off, DALI	0.70 kg
Extra clear - Without remote driver - Constant voltage (CV) 24 V - 40 x 40 x 1070 mm								
INFINITE 4	INF-60003	30 LED	36 W	2484 - 2664 lm	N [12°], M [25°], W [42°], E [10x40°]	2700K CRI90, 3000K CRI90	On/Off	1.12 kg
Extra clear - Without remote driver - Constant voltage (CV) 24 V - 40 x 40 x 470 mm								
INFINITE 4	INF-60001	12 LED	14.4 W	994 - 1066 lm	N [12°], M [25°], W [42°], E [10x40°]	2700K CRI90, 3000K CRI90	On/Off	0.50 kg
Extra clear - Without remote driver - Constant voltage (CV) 24 V - 40 x 40 x 670 mm								
INFINITE 4	INF-60002	18 LED	21.6 W	1490 - 1598 lm	N [12°], M [25°], W [42°], E [10x40°]	2700K CRI90, 3000K CRI90	On/Off	0.70 kg


Accessory

							
INF-60001	•	•	•	•	•	•	•
INF-60002	•	•	•	•	•	•	•
INF-60003	•	•	•	•	•	•	•
INF-60011	•	•	•	•	•	•	•
INF-60012	•	•	•	•	•	•	•
INF-60013	•	•	•	•	•	•	•


		
INF-60001	•	•
INF-60002	•	•
INF-60003	•	•
INF-60011	•	•
INF-60012	•	•
INF-60013	•	•

INFINITE


INF-60001

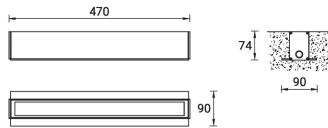


INF-60011




INF-60002

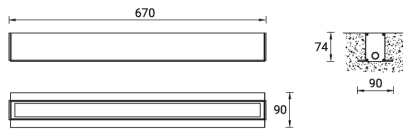


INF-60012

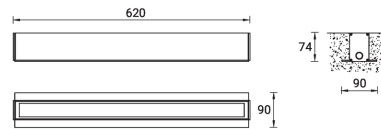


INF-60003

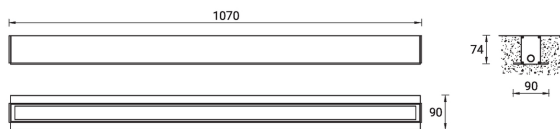

INF-60013

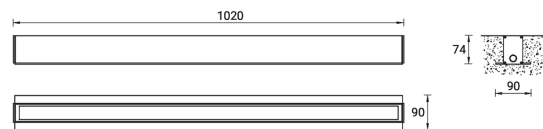

INFINITE

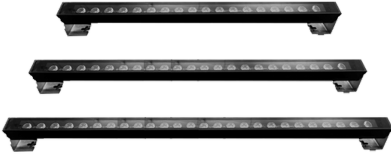

INFINITE**Surface facade luminaires**

Designed with cutting-edge LED technology, these luminaires deliver exceptional visual comfort and precise illumination tailored for outdoor environments. With an optimized housing surface to minimize dust accumulation, INFINITE ensures long-term performance with reduced maintenance, making it ideal for demanding outdoor applications. Crafted from premium optical components and housed in a durable, weather-resistant body, this lighting range is engineered for highlighting architectural details and creating dramatic grazing effects or uniform wall washes—all in a seamless, modular system. Whether illuminating facades or emphasising architectural textures, INFINITE offers versatility, performance, and design intent in one cohesive solution.

<https://www.ligman.com/infinite-surface-facade-luminaires-inf-su3/>