

# JANET




Compact and economic underwater fixture range. Competitive and flexible quality recessed fixtures with multiple beam angles.




## Luminaire Structure

- |  |  |   |
|--|--|---|
| <ul style="list-style-type: none"> <li>- Stainless steel body in grade 316</li> <li>- Single cable entry</li> <li>- Stainless steel fasteners in grade 316</li> <li>- Durable silicone rubber gasket</li> <li>- Clear toughened glass</li> </ul> | <ul style="list-style-type: none"> <li>- Remote driver is included for constant current (CC) products and is not IP-rated</li> <li>- Remote driver is not included for constant voltage (CV) products</li> <li>- Remote box IP-rated is not included and is to be ordered separately for constant current (CC) products</li> <li>- Recessing box in stainless steel 316 grade</li> </ul> | <ul style="list-style-type: none"> <li>- Luminaire must be submerged when operational</li> <li>- Maximum depth 2 m</li> <li>- Outdoor cable needs to be ordered with a specific length</li> </ul> |
|--|--|---|


## Feature

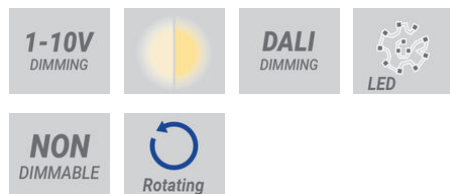

## Optic



## Product colour



# JANET

## Technical information

	Model number	Light source	Power	Lumen	Optic	CCT / CRI	Dimming type	Weight
<b>Without remote box IP-rated - With remote driver / recessing box - Constant current (CC) 700 mA</b>								
JANET 1	<b>JA-60067</b>	3 LED	8 W	506 - 779 lm	N [28°], M [32°], W [51°]	2700K CRI80, 3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	1.6 kg
JANET 2	<b>JA-60811</b>	5 LED	11 W	1240 - 1726 lm	N [23°], M [34°], W [42°]	2700K CRI80, 3000K CRI80, 4000K CRI80	On/Off, 1-10V	1.6 kg
<b>Without remote driver - With recessing box - Constant voltage (CV) 24 V</b>								
JANET 3	<b>JA-60821</b>	3 LED	7 W	617 - 765 lm	N [23°], M [31°], W [51°]	3000K CRI80, 4000K CRI80	On/Off	1.6 kg
JANET 3	<b>JA-60822</b>	5 LED	11 W	1057 - 1290 lm	N [22°], M [30°], W [48°]	3000K CRI80, 4000K CRI80	On/Off	1.6 kg

## Accessories

	 Driver (CV) - On/Off - 36 W - IP67 - 24 V <b>A34491-ND</b>	 Driver (CV) - On/Off - 60 W - IP67 - 24 V <b>A34591-ND</b>	 Driver (CV) - On/Off - 100 W - IP67 - 24 V <b>A34791-ND</b>	 Driver (CV) - On/Off - 150 W - IP67 - 24 V <b>A34891-ND</b>	 Driver (CV) - On/Off - 200 W - IP67 - 24 V <b>A34991-ND</b>	 Driver (CV) - On/Off - 350 W - IP67 - 24 V <b>A35091-ND</b>	 Remote box IP65 <b>A80191</b>
JA-60067							.
JA-60811							
JA-60821	.	.	.	.	.	.	
JA-60822	.	.	.	.	.	.	

	 Remote box IP65 <b>A80291</b>	 DALI Control System Control-DALI
JA-60067		.
JA-60811	.	.
JA-60821		
JA-60822		

# JANET

JA-60067, JA-60811,  
JA-60821, JA-60822

