


JASPER



Directional recessed accent lighting range.
Variable technical options and wide range of optics and lumen packages.




Luminaire Structure

- Die-cast aluminium housing with powder coating


- Die-cast aluminium heat sink with excellent thermal management
- Propriety lens design for high LOR
- Adjustable: Tilt 30°

- Remote driver is included

Feature

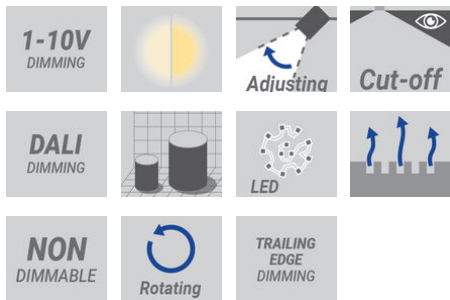

Optic



Product colour



JASPER

Technical information

	Model number	Light source	Power	Lumen	Optic	CCT / CRI	Dimming type	Weight
Ø115 mm								
JASPER 2	JS-80011	5 LED	9 W	612 - 750 lm	N [19°], M [31°], W [48°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI, Trailing edge	0.43 kg.
JASPER 2	JS-80021	7 LED	12 W	883 - 1040 lm	N [15°], M [26°], W [39°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI, Trailing edge	0.43 kg.
Ø138 mm								
JASPER 4	JS-80051	18 LED	29 W	2484 - 2837 lm	N [15°], M [27°], W [42°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	1.16 kg.
Ø145 mm								
JASPER 3	JS-80031	9 LED	15 W	1095 - 1283 lm	N [15°], M [26°], W [26°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI, Trailing edge	0.89 kg.
JASPER 3	JS-80041	12 LED	20 W	1512 - 1719 lm	N [15°], M [26°], W [39°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI, Trailing edge	0.89 kg.
Ø160 mm								
JASPER 5	JS-80061	24 LED	39 W	3235 - 3670 lm	N [14°], M [27°], W [47°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	1.60 kg.
Ø95 mm								
JASPER 1	JS-80001	3 LED	6 W	349 - 429 lm	N [20°], M [28°], W [47°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	0.26 kg.

Accessories



DALI Control System
Control-DALI

JS-80001	•
JS-80011	•
JS-80021	•
JS-80031	•
JS-80041	•
JS-80051	•
JS-80061	•

