

**KWH**



Rounded profile linear surface-mounted luminaire. Robust, tiltable body offered in different lengths providing multiple optical and professional lighting solutions for building, area and facade lighting.




**Luminaire Structure**

- Die-cast aluminium end-caps
- Extruded aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry, through wiring upon request
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency PMMA lens
- Clear toughened glass
- Integral control gear


**Feature**




**Optic**

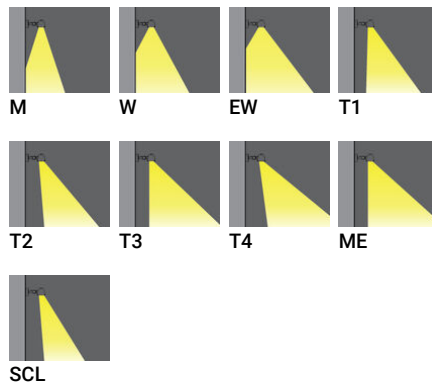

**Product colour**

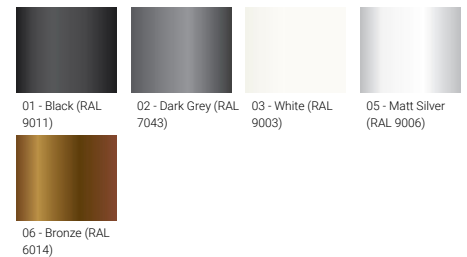

**Special finishes upon request**

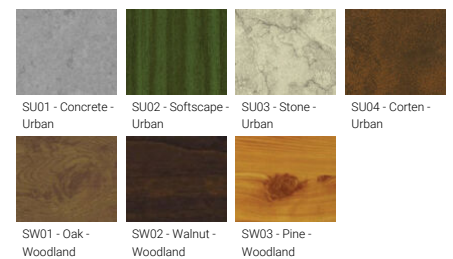

## KWH

## Technical information

	Model number	Light source	Power	Lumen	Optic	CCT / CRI	Dimming type	Weight
<b>Large</b>								
KWH 3	<b>KWH-30021</b>	6 x 12 LED	57 W	6422 - 7778 lm	M [31°, W [56°, EW [107°, T1 [147° x 78°, T2 [139° x 57°, T3 [133° x 88°, T4 [104° x 67°, ME [141° x 60°, SCL [154° x 68°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	10.96 kg
<b>Medium</b>								
KWH 2	<b>KWH-30011</b>	4 x 12 LED	38 W	4280 - 5182 lm	M [31°, W [55°, EW [107°, T1 [147° x 77°, T2 [139° x 57°, T3 [133° x 88°, T4 [104° x 66°, ME [141° x 60°, SCL [154° x 68°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	6.40 kg
<b>Small</b>								
KWH 1	<b>KWH-30001</b>	2 x 12 LED	19 W	2140 - 2591 lm	M [31°, W [55°, EW [107°, T1 [147° x 77°, T2 [139° x 57°, T3 [133° x 88°, T4 [104° x 66°, ME [141° x 60°, SCL [154° x 68°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	3.95 kg


## Accessories




DALI Control System  
**Control-DALI**

KWH-30001	•
KWH-30011	•
KWH-30021	•


KWH-30001

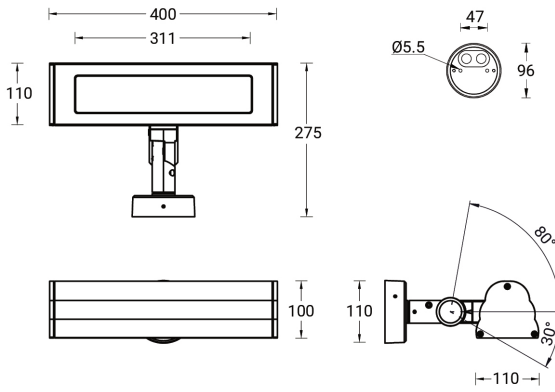

KWH-30011

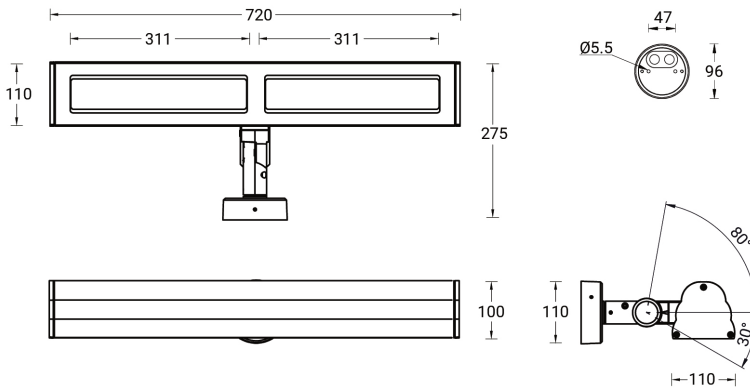

KWH-30021

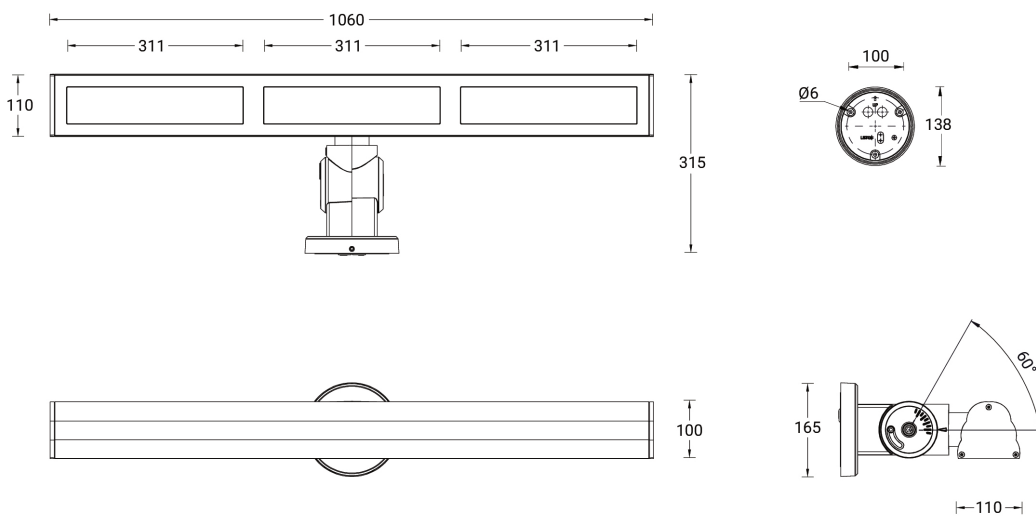

**KWH**

KWH  
**Post top luminaires**

Rounded profile linear post-top luminaire. Robust, tiltable body offered in different lengths providing multiple optical and professional area lighting solutions.

<https://www.ligman.com/kwh-post-top-luminaires-kw-po3/>



KWH  
**Floodlights, projectors**

Linear, rounded profile luminaire with surface-mounting bracket. Robust, tiltable body, offered in different lengths providing multiple optical and professional lighting solutions for building, area and facade lighting.

<https://www.ligman.com/kwh-floodlights-projectors-kw-pr3/>