

LADOR



Square adjustable architectural floodlight range with an extended arm, available wall-mounted or threaded for ease of installation. Four sizes of square artistic precision with a wide range of beam distributions.




microPrim™


Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Thermal heat dissipation body
- Adjustable: Tilt 80° (Up) & 40° (Down), Rotation 350°
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency PMMA lens
- Clear toughened glass
- Integral control gear for LD-50161, LD-50171, LD-50181, LD-50191, LD-50261, LD-50271
- Remote driver is included for constant voltage (CV) products


Feature

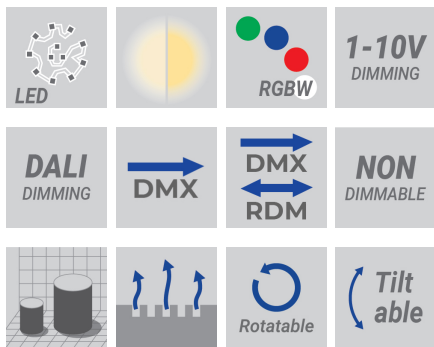


Optic

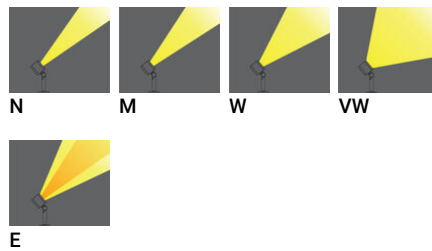

Product colour

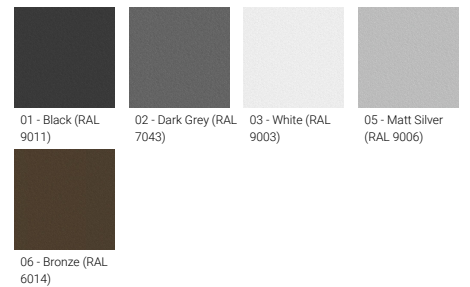

Special finishes upon request

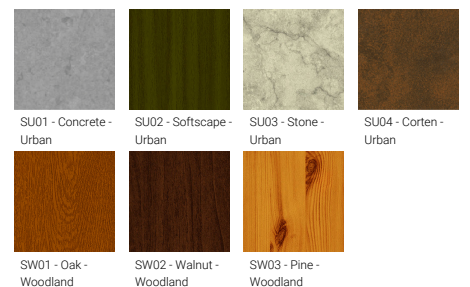

LADOR








Technical information



	Model number	Light source	Power	Lumen	Optic	CCT / CRI	Dimming type	Weight
Bracket mounted - Integral control gear - 120x120 mm - Class I								
LADOR 30	LD-50181	9 LED	21 W	1921 - 2364 lm	N [10°], M [17°], W [34°], VW [70°], E [43°x11°]	3000K CRI80, 4000K CRI80	On/Off, DALI	3.2 kg
Bracket mounted - Integral control gear - 120x120 mm - Class I - RGBW								
LADOR 48	LD-50261	8 LED	22 W	853 - 1133 lm	N [8°], M [17°], W [26°], VW [65°], E [43°x11°]	RGBW30, RGBW40	DMX, DMX/RDM	3.2 kg
Bracket mounted - Integral control gear - 145x145 mm - Class I								
LADOR 31	LD-50191	16 LED	35 W	3263 - 4110 lm	N [10°], M [16°], W [33°], VW [72°], E [43°x11°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	4.0 kg
Bracket mounted - Integral control gear - 145x145 mm - Class I - RGBW								
LADOR 49	LD-50271	16 LED	28 W	1322 - 1600 lm	N [8°], M [17°], W [26°], VW [65°], E [43°x11°]	RGBW30, RGBW40	DMX, DMX/RDM	4.0 kg
Bracket mounted - Integral control gear - 62x62 mm - Class I								
LADOR 28	LD-50161	1 LED	3 W	209 - 262 lm	N [10°], M [16°], W [32°], VW [70°], E [42°x11°]	3000K CRI80, 4000K CRI80	On/Off	1.6 kg
Bracket mounted - Integral control gear - 82x82 mm - Class I								
LADOR 29	LD-50171	4 LED	10 W	906 - 1112 lm	N [10°], M [16°], W [34°], VW [68°], E [43°x11°]	3000K CRI80, 4000K CRI80	On/Off	2.0 kg
Bracket mounted - With remote driver IP-rated - Constant voltage (CV) 24 V - 62x62 mm - Class III - RGBW								
LADOR 46	LD-50241	1 LED	4 W	166 - 170 lm	M [34°]	RGBW30, RGBW40	DMX, DMX/RDM	1.6 kg
Bracket mounted - With remote driver IP-rated - Constant voltage (CV) 24 V - 82x82 mm - Class III - RGBW								
LADOR 47	LD-50251	4 LED	10 W	406 - 520 lm	N [8°], M [17°], W [26°], VW [65°], E [43°x11°]	RGBW30, RGBW40	DMX, DMX/RDM	2.0 kg

Accessory

	 Ground spike A51041	 Linear spread lens A51114	 Linear spread lens A51214	 Linear spread lens A51314	 Linear spread lens A51414	 Honeycomb louvre A51821	 Honeycomb louvre A51921
LD-50161
LD-50171
LD-50181
LD-50191
LD-50241
LD-50251
LD-50261
LD-50271



LADOR

	 Honeycomb louvre A52021	 Honeycomb louvre A52121	 Anti-glare visor A52831	 Anti-glare visor A52931	 Anti-glare visor A53031	 Anti-glare visor A53131	 DALI Control System Control-DALI
LD-50161			.				
LD-50171				.			
LD-50181	.				.		.
LD-50191		.				.	.
LD-50241			.				
LD-50251							
LD-50261	.				.		
LD-50271		.		.		.	



	 DMX Control System Control-DMX	 DMX/RDM Control System Control-DMX-RDM
LD-50161		
LD-50171		
LD-50181		
LD-50191		
LD-50241	.	.
LD-50251	.	.
LD-50261	.	.
LD-50271	.	.

LADOR



LD-50161, LD-50241

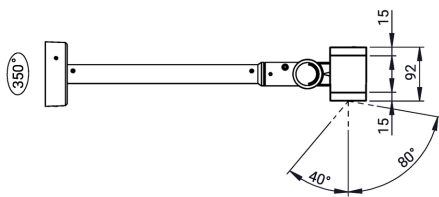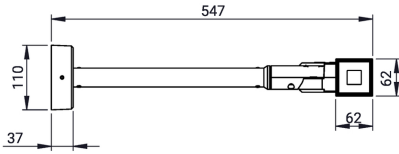




LD-50171, LD-50251

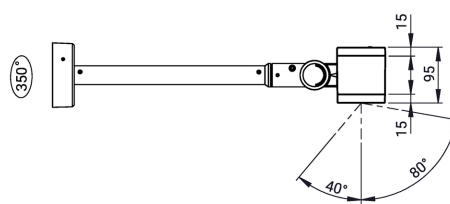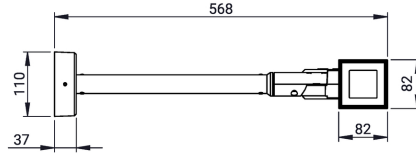

LD-50181, LD-50261

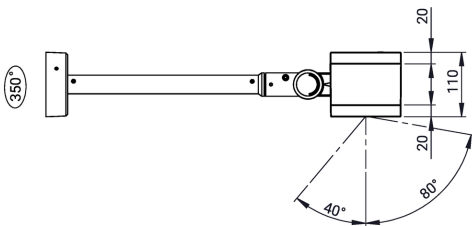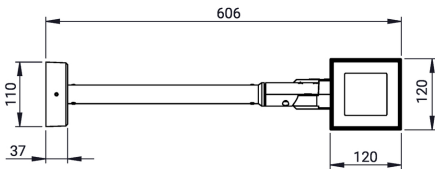

LD-50191, LD-50271

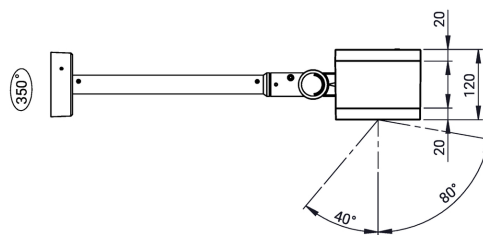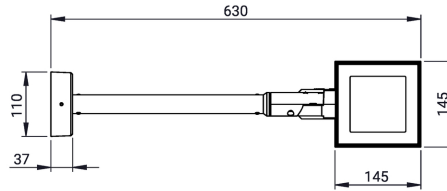

LADOR



LADOR
Surface exterior downlights

Square surface ceiling-mounted architectural range. Four sizes of square artistic precision with wide range of beam distributions.

<https://www.ligman.com/lador-surface-exterior-downlights-la-ce3/>



LADOR
Surface facade luminaires

Square surface wall-mounted architectural range. Four sizes of square artistic precision with wide range of beam distributions.

<https://www.ligman.com/lador-surface-facade-luminaires-la-su3/>



LADOR
Floodlights, projectors

Square surface architectural floodlight range. Four sizes of square artistic precision with wide range of beam distributions.

<https://www.ligman.com/lador-floodlights-projectors-la-pr3/>



LADOR
Cluster column projectors

Adjustable column architectural cluster solution. Flexible project solutions in attractive cluster arrangements using the square-form architectural LADOR projector range.

<https://www.ligman.com/lador-cluster-column-projectors-lad-pr3/>



LADOR
Fixed-base projectors

Square surface architectural fixe-base projector range. Four sizes of square artistic precision with wide range of beam distributions.

<https://www.ligman.com/lador-fixed-base-projectors-lado-pr3/>