

LEEDS




Clean, beautiful, single or double sided surface wall-fixtures with class leading performance. Minimalist form, yet the most powerful and flexible lighting tool of its type, offering packages up to 4000 lumens and various street optic options.




Luminaire Structure

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry, through wiring upon request
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Integral control gear
- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible


Feature

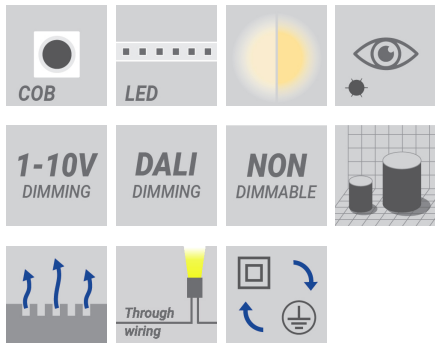


Optic

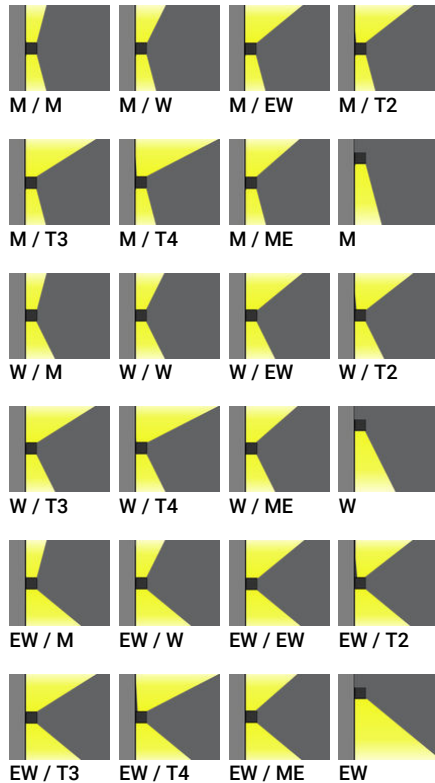

Product colour

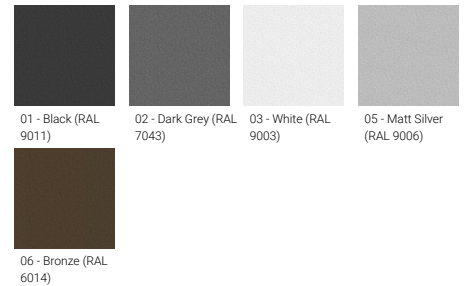

Special finishes upon request

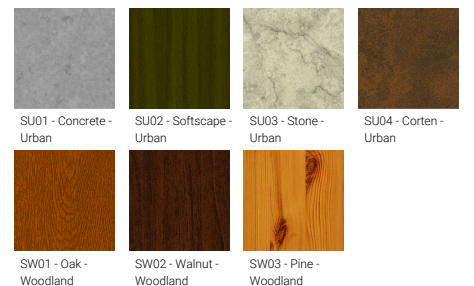

We reserve the right to make technical and design changes.


07:10, 01-04-2026

<https://www.ligman.com/leeds-surface-facade-luminaires-lee-su3/>

THAILAND
LIGMAN Lighting Co.,Ltd.
17/2 Moo 4, Monthong, Bang Nam Prio, 24150 Chachoengsao - Thailand
info@ligman.com



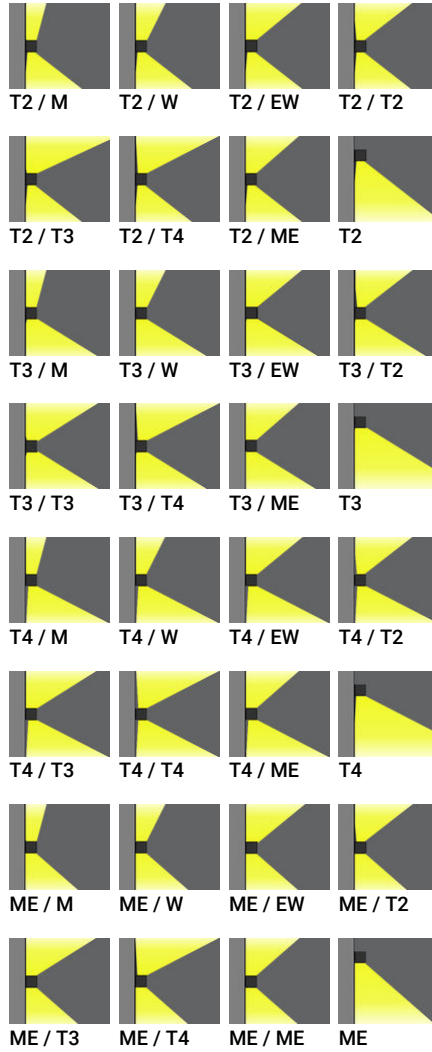


LEEDS










LEEDS

Technical information


	Model number	Light source	Power	Lumen	Optic	CCT / CRI	Dimming type	Weight	
Down (Optic) & Up (Optic 2nd) - Rectangular									
LEEDS 3	LEE-30041	8 & 8 LED	26 W	2606 - 3350 lm	M [30°, W [56°, EW [104°x111°, T2 [56°x139°, T3 [86°x124°, T4 [89°x106°, ME [61°x139°]	2700K CRI80, 3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	1.8 kg	
LEEDS 5	LEE-30051	12 & 12 LED	39 W	4090 - 4982 lm	M [30°, W [56°, EW [103°x110°, T2 [58°x137°, T3 [67°x124°, T4 [67°x108°, ME [62°x141°]	2700K CRI80, 3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	2.0 kg	
Down (Optic) & Up (Optic 2nd) - Square									
LEEDS 1	LEE-30031	4 & 4 LED	15 W	1090 - 1590 lm	M [30°, W [56°, EW [99°x102°, T2 [130°x50°, T3 [112°x80°, T4 [90°x61°, ME [122°x50°]	2700K CRI80, 3000K CRI80, 4000K CRI80	On/Off	1.1 kg	
Down - Rectangular									
LEEDS 4	LEE-30011	8 LED	14 W	1303 - 1675 lm	M [30°, W [56°, EW [111°x104°, T2 [139°x56°, T3 [124°x86°, T4 [106°x89°, ME [139°x61°]	2700K CRI80, 3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	1.5 kg	
LEEDS 6	LEE-30021	12 LED	20 W	2045 - 2491 lm	M [30°, W [56°, EW [103°x110°, T2 [58°x137°, T3 [67°x124°, T4 [67°x108°, ME [62°x141°]	2700K CRI80, 3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	1.8 kg	
Down - Square									
LEEDS 2	LEE-30001	4 LED	8 W	545 - 795 lm	M [30°, W [56°, EW [99°x102°, T2 [130°x50°, T3 [112°x80°, T4 [90°x61°, ME [122°x50°]	2700K CRI80, 3000K CRI80, 4000K CRI80	On/Off	0.8 kg	

Accessory


	 DALI Control System Control-DALI	 Surface mounting box for easy cabling (LEEDS 1) SCE-LEEDS-1	 Surface mounting box for easy cabling (LEEDS 2) SCE-LEEDS-2	 Surface mounting box for easy cabling (LEEDS 3) SCE-LEEDS-3	 Surface mounting box for easy cabling (LEEDS 4) SCE-LEEDS-4	 Surface mounting box for easy cabling (LEEDS 5) SCE-LEEDS-5	 Surface mounting box for easy cabling (LEEDS 6) SCE-LEEDS-6
LEE-30001							
LEE-30011							
LEE-30021							
LEE-30031							
LEE-30041							
LEE-30051							

LEEDS


LEE-30031

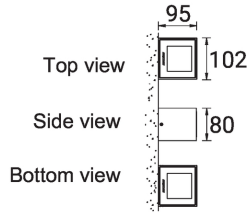


LEE-30001

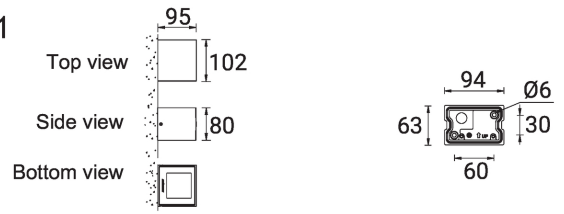


LEE-30041



LEE-30011

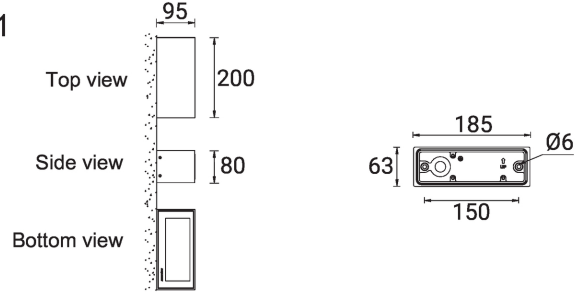

LEE-30051



LEE-30021

