

LEGEND



Rectangular time-honored wall recessed accent range. Efficient, flexible and tough family in the classic brick-light proportions.




microPrim™




Luminaire Structure

- Available with interchangeable aluminium or stainless steel grade 316 frames
- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Opal high-efficiency PMMA diffuser
- Integral control gear


Feature

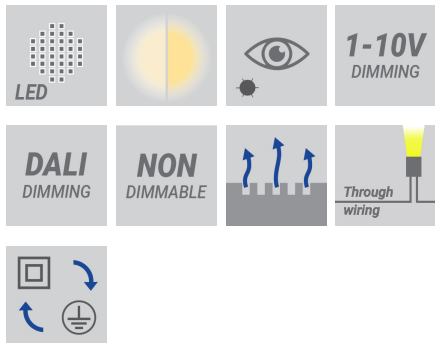


Optic

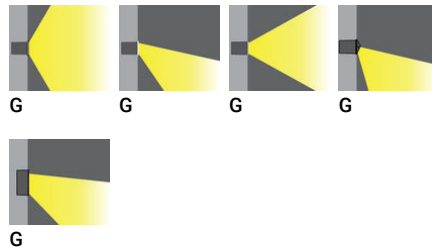

Product colour

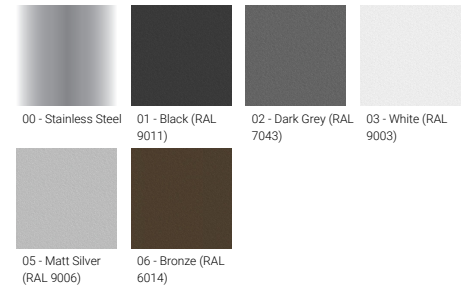

Special finishes upon request

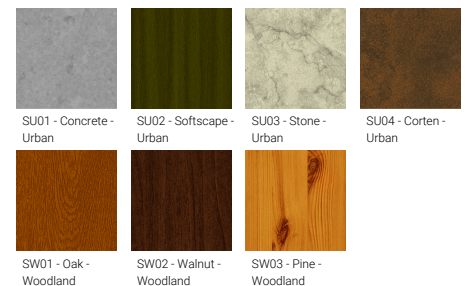

LEGEND

Technical information

	Model number	Light source	Power	Lumen	Optic	CCT / CRI	Dimming type	Weight	
With recessing box - Aluminium frame - IK08									
LEGEND 1	LE-40741-A	60 LED	14 W	1135 - 1194 lm	G [98°x106°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	2.3 kg	
With recessing box - Aluminium frame - IK07									
LEGEND 1	LE-40591-A	48 LED	13 W	1270 - 1337 lm	G [96°x180°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	1.4 kg	
LEGEND 2	LE-40601-A	48 LED	13 W	372 - 392 lm	G [103°x50°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	1.6 kg	
LEGEND 3	LE-40611-A	48 LED	13 W	549 - 578 lm	G [105°x45°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	1.4 kg	
LEGEND 4	LE-40621-A	48 LED	13 W	550 - 578 lm	G [110°x180°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	1.6 kg	
LEGEND 9	LE-40671-A	48 LED	13 W	558 - 587 lm	G [91°x180°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	1.6 kg	
With recessing box - Aluminium frame - IK08									
LEGEND 2	LE-40742-A	60 LED	14 W	264 - 278 lm	G [65°x113°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	2.3 kg	
With recessing box - Stainless frame - IK07									
LEGEND 1	LE-40591-S	48 LED	13 W	1270 - 1337 lm	G [96°x180°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	1.7 kg	
LEGEND 2	LE-40601-S	48 LED	13 W	445 - 468 lm	G [112°x180°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	1.9 kg	
LEGEND 3	LE-40611-S	48 LED	13 W	752 - 791 lm	G [108°x180°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	1.9 kg	
With recessing box - Stainless frame - IK08									
LEGEND 1	LE-40741-S	60 LED	14 W	1124 - 1183 lm	G [101°x106°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	2.3 kg	
LEGEND 2	LE-40742-S	60 LED	14 W	298 - 313 lm	G [65°x112°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	2.3 kg	

Accessory




DALI Control System
Control-DALI


LE-40591-A	•
LE-40591-S	•
LE-40601-A	•
LE-40601-S	•
LE-40611-A	•
LE-40611-S	•
LE-40621-A	•
LE-40671-A	•
LE-40741-A	•
LE-40741-S	•
LE-40742-A	•
LE-40742-S	•

LEGEND


LE-40591

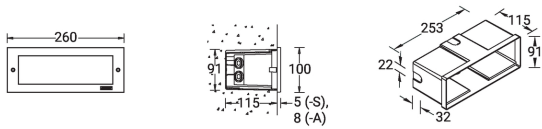


LE-40741

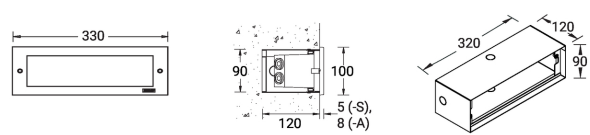


LE-40601

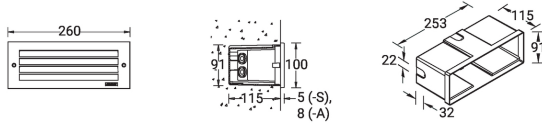


LE-40742

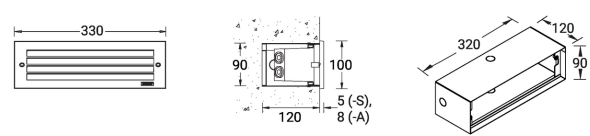

LE-40611

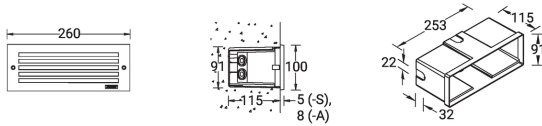

LE-40621

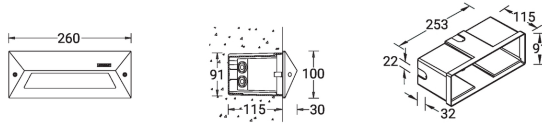

LE-40671

