

LIGHTALK



Efficient quality linear fixture portfolio.
Coordinated pendant range with multiple optics and component options.




microPrim™


Luminaire Structure

- Die-cast aluminium end-caps
- Extruded aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry, through wiring upon request or two cable entries for through wiring
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Integral control gear for LA-95001, LA-95002
- Remote driver is included for constant current (CC) products and is not IP-rated
- Remote driver is not included for constant voltage (CV) products
- Remote box IP-rated is not included and is to be ordered separately for constant current (CC) products
- Stainless steel suspension kit in grade 304
- Suspension height is fully adjustable


Feature

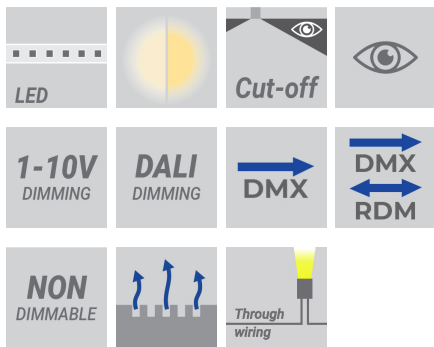


Optic

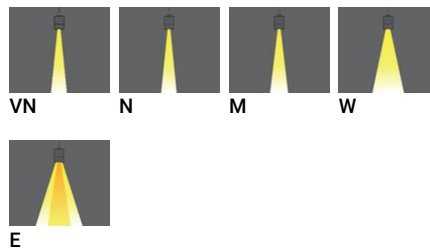

Product colour

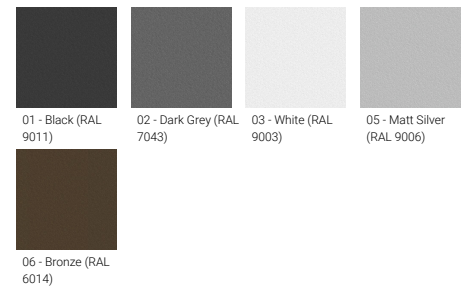

Special finishes upon request

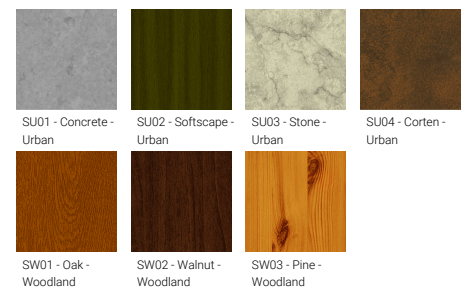








LIGHTALK








Technical information

	Model number	Light source	Power	Lumen	Optic	CCT / CRI	Dimming type	Weight	
Integral control gear - 1205 mm - Class I									
LIGHTALK 3	LA-95002	36 LED	55 W	3908 - 5703 lm	VN [12°], N [14°], M [24°], W [42°], E [18° x 35°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	5.7 kg	
Integral control gear - 610 mm - Class I									
LIGHTALK 3	LA-95001	18 LED	28 W	1943 - 2847 lm	VN [12°], N [14°], M [24°], W [44°], E [18° x 35°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	3.6 kg	
Without remote box IP-rated - With remote driver - Constant current (CC) 500 mA - 1205 mm - Class I									
LIGHTALK 4	LA-95022	36 LED	55 W	3908 - 5703 lm	VN [12°], N [14°], M [24°], W [42°], E [18° x 35°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	4.0 kg	
Without remote box IP-rated - With remote driver - Constant current (CC) 500 mA - 610 mm - Class I									
LIGHTALK 4	LA-95021	18 LED	28 W	1943 - 2847 lm	VN [12°], N [14°], M [24°], W [44°], E [18° x 35°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	2.1 kg	
Without remote driver - Constant voltage (CV) 24 V - 1205 mm - Class III									
LIGHTALK 13	LA-95033	36 LED	51 W	3871 - 4975 lm	VN [13°], N [15°], M [25°], W [43°], E [22° x 36°]	3000K CRI80, 4000K CRI80	On/Off	4.0 kg	
Without remote driver - Constant voltage (CV) 24 V - 1205 mm - Class III - RGBW									
LIGHTALK 18	LA-95043	36 LED	70 W	1810 - 4025 lm	N [16°], M [32°], W [55°], E [20°x30°]	RGBW30, RGBW40, RGB+Amber	DMX, DMX/RDM	6.2 kg	
LIGHTALK 19	LA-95052	40 LED	66 W	3477 - 4043 lm	VN [10°], N [13°], M [25°], W [43°], E [18° x 35°]	RGBW30, RGBW40	DMX, DMX/RDM	5.3 kg	
Without remote driver - Constant voltage (CV) 24 V - 410 mm - Class III									
LIGHTALK 13	LA-95031	12 LED	16 W	1471 - 1882 lm	VN [13°], N [15°], M [27°], W [43°], E [21° x 35°]	3000K CRI80, 4000K CRI80	On/Off	1.3 kg	
Without remote driver - Constant voltage (CV) 24 V - 410 mm - Class III - RGBW									
LIGHTALK 18	LA-95041	12 LED	24 W	510 - 1383 lm	N [16°], M [32°], W [55°], E [20°x30°]	RGBW30, RGBW40, RGB+Amber	DMX, DMX/RDM	2.2 kg	
Without remote driver - Constant voltage (CV) 24 V - 610 mm - Class III									
LIGHTALK 13	LA-95032	18 LED	25 W	2202 - 2760 lm	VN [13°], N [15°], M [27°], W [44°], E [22° x 36°]	3000K CRI80, 4000K CRI80	On/Off	2.1 kg	
Without remote driver - Constant voltage (CV) 24 V - 610 mm - Class III - RGBW									
LIGHTALK 18	LA-95042	18 LED	35 W	905 - 2012 lm	N [16°], M [32°], W [55°], E [20°x30°]	RGBW30, RGBW40, RGB+Amber	DMX, DMX/RDM	3.7 kg	
LIGHTALK 19	LA-95051	20 LED	33 W	1592 - 1916 lm	VN [10°], N [13°], M [24°], W [43°], E [16° x 35°]	RGBW30, RGBW40	DMX, DMX/RDM	3.8 kg	


LIGHTALK

Accessory



	 Driver (CV) - On/Off - 36 W - IP67 - 24 V A34491-ND	 Driver (CV) - On/Off - 60 W - IP67 - 24 V A34591-ND	 Driver (CV) - On/Off - 100 W - IP67 - 24 V A34791-ND	 Driver (CV) - On/Off - 200 W - IP67 - 24 V A34991-ND	 Driver (CV) - On/Off - 350 W - IP67 - 24 V A35091-ND	 Cable - Connector IP67 Female 2 Pin Power - 1000 mm A65491-001	 Cable - Connector IP67 Female 2 Pin Power - 5000 mm A65491-005
LA-95001							
LA-95002							
LA-95021							
LA-95022							
LA-95031	•	•	•	•	•	•	•
LA-95032	•	•	•	•	•	•	•
LA-95033	•	•	•	•	•	•	•
LA-95041	•	•	•	•	•		
LA-95042	•	•	•	•	•		
LA-95043	•	•	•	•	•		
LA-95051	•	•	•	•	•		
LA-95052	•	•	•	•	•		

	 Cable - Connector IP67 Female + Male 2 Pin Power - 1000 mm A65591-001	 Cable - Connector IP67 Female + Male 2 Pin Power - 5000 mm A65591-005	 Connector IP67 Female 2 Pin Power A68191	 Connector IP67 Male 2 Pin Power A68291	 DALI Control System Control-DALI	 DMX Control System Control-DMX	 DMX/RDM Control System Control-DMX- RDM
LA-95001					•		
LA-95002					•		
LA-95021					•		
LA-95022					•		
LA-95031	•	•	•	•			
LA-95032	•	•	•	•			
LA-95033	•	•	•	•			
LA-95041						•	•
LA-95042						•	•
LA-95043						•	•
LA-95051						•	•
LA-95052						•	•


LA-95001





LA-95002

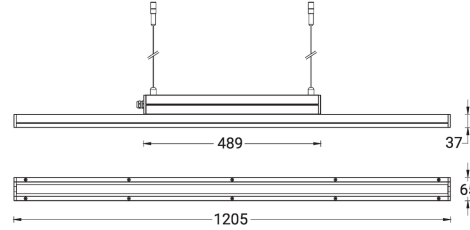


LA-95021




LA-95022

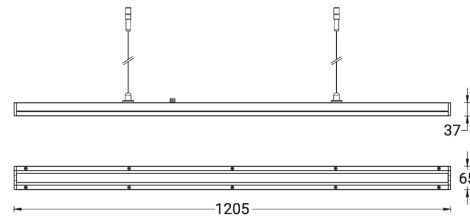



LA-95031




LA-95032




LA-95033

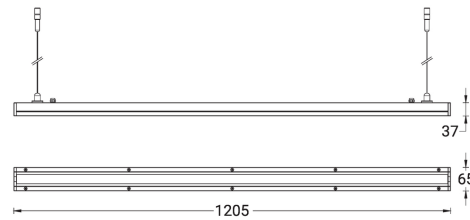



LA-95041




LA-95042





LA-95043

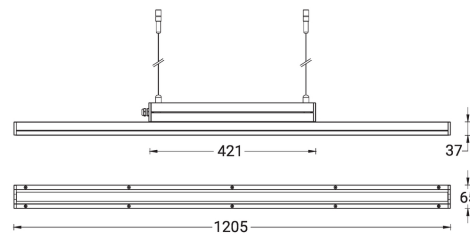

LA-95051



LA-95052

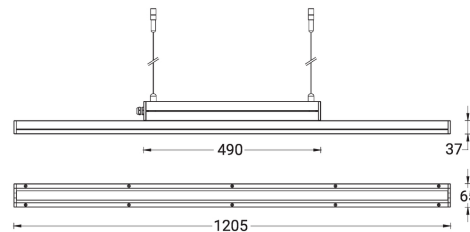

LIGHTALK

LIGHTALK
Recessed luminaires

Efficient quality linear fixture portfolio.
Coordinated wall or ceiling recessed range with
multiple optics and component options.

<https://www.ligman.com/lighttalk-recessed-luminaires-li-re3/>



LIGHTALK
In-ground luminaires

Efficient quality linear fixture portfolio.
Coordinated in-ground range with multiple optics
and component options.

<https://www.ligman.com/lighttalk-in-ground-luminaires-li-in3/>



LIGHTALK
Wall washer floodlights

Efficient quality linear fixture portfolio.
Coordinated grazing-floodlight range with multiple
optics and component options.

<https://www.ligman.com/lighttalk-wall-washer-floodlights-li-pr3/>