


LYCKSELE



Column light-structure. Unique and innovative light structure solution with a maritime flavor. Optional heights, frames sizes and projector arrangements afford complete project tailoring.

Luminaire Structure


- Die-cast aluminium housing
- Extruded aluminium column and arm
- Pre-treated before powder coating ensuring high corrosion resistance
- One IP68 connector supplied with 0.3 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Maximum wind load resistance is 140 km/h
- Surge protection 10kV

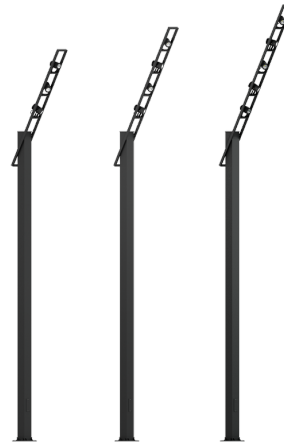


Feature




Light symbol



Product colour

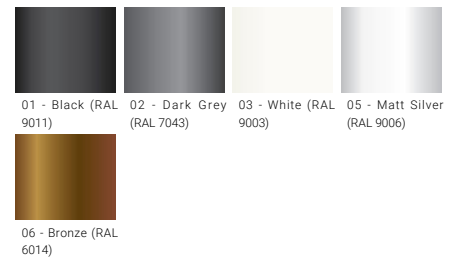

Special finishes upon request

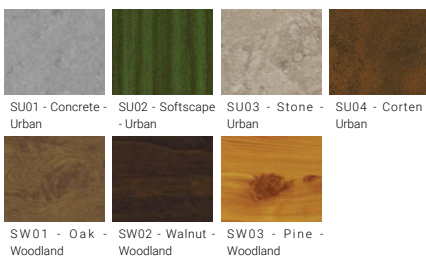

We reserve the right to make technical and design changes.

01:30, 25-10-2022

<https://www.ligman.com/lycksele-light-columns-ly-li3/>

Europe
LIGMAN EUROPE s.r.o.
VGP Park Ústí nad Labem
P 2 120
40317, Přestanov
Czech Republic
+420 477 071 500
sales.cz@ligman.com





ASIA PACIFIC
LIGMAN Lighting Co.,Ltd.
17/2 Moo4 Monthong
Bangnampreaw
24150, Chachoengsao
Thailand
+66 2 108 6700
info@ligman.com

LYCKSELE

Technical information

	Model number	Light source	Power	Lumen	Optic	CCT / CRI	Dimming type	Weight
3 projectors - Supplied with specific 6 m square, straight aluminium pole: APC160193-LY								
LYCKSELE 1	LY-20001	1 COB	108 W	8814 - 10374 lm	M [27°], N [18°], VW [70°], W [47°]	3000K CRI80, 4000K CRI80	DALI, On/Off	68.3 kg
4 projectors - Supplied with specific 6 m square, straight aluminium pole: APC160193-LY								
LYCKSELE 1	LY-20011	1 COB	144 W	11752 - 13832 lm	M [27°], N [18°], VW [70°], W [47°]	3000K CRI80, 4000K CRI80	DALI, On/Off	71.8 kg
5 projectors - Supplied with specific 6 m square, straight aluminium pole: APC160193-LY								
LYCKSELE 1	LY-20021	1 COB	180 W	14690 - 17290 lm	M [27°], N [18°], VW [70°], W [47°]	3000K CRI80, 4000K CRI80	DALI, On/Off	75.5 kg

Accessories

	 Root mount kit A21091	 Circuit breaker box IP44 A21291	 6 m - Square, straight aluminium pole for LYCKSELE APC160193-LY	 DALI Control System Control-DALI
LY-20001	•	•	•	•
LY-20011	•	•	•	•
LY-20021	•	•	•	•

We reserve the right to make technical and design changes.

01:30, 25-10-2022

<https://www.ligman.com/lycksele-light-columns-ly-li3/>


Europe
 LIGMAN EUROPE s.r.o.
 VGP Park Ústí nad Labem
 P 2 120
 40317, Přestanov
 Czech Republic
 +420 477 071 500
sales.cz@ligman.com

ASIA PACIFIC
 LIGMAN Lighting Co.,Ltd.
 17/2 Moo4 Monthong
 Bangnampreaw
 24150, Chachoengsao
 Thailand
 +66 2 108 6700
info@ligman.com

LYCKSELE

LYCKSELE

LYCKSELE 1

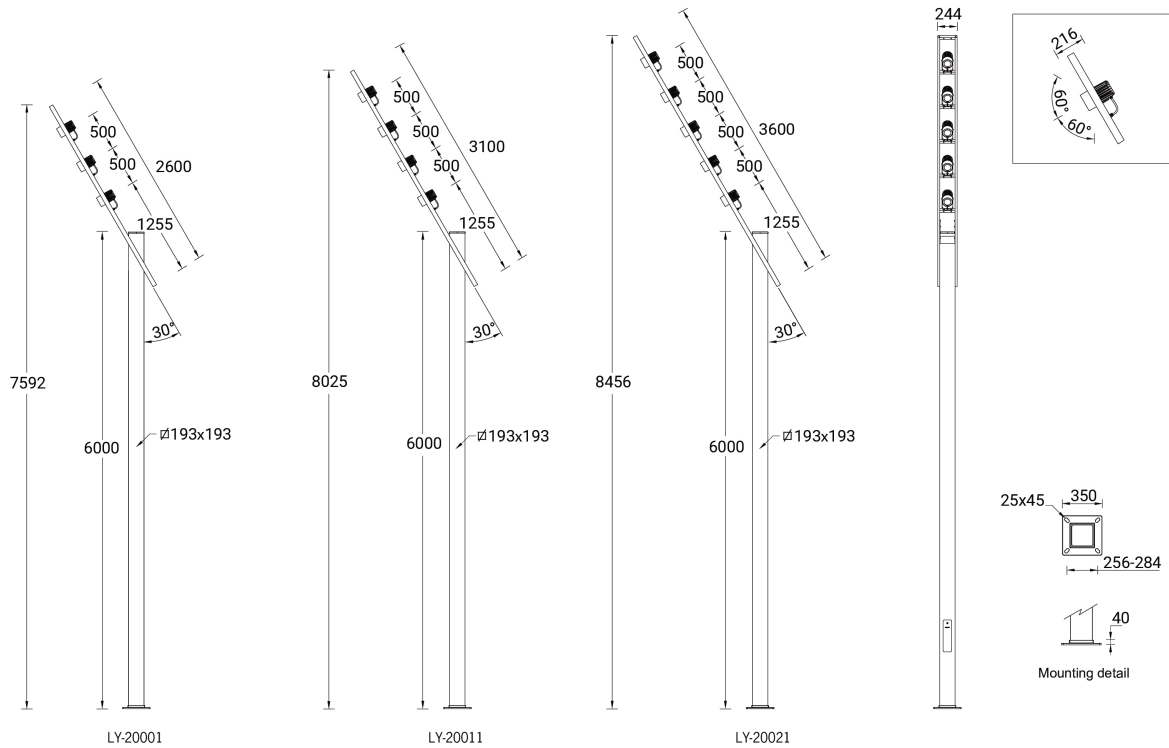

We reserve the right to make technical and design changes.

01:30, 25-10-2022

<https://www.ligman.com/lycksele-light-columns-ly-li3/>

Europe
 LIGMAN EUROPE s.r.o.
 VGP Park Ústí nad Labem
 P 2 120
 40317, Přestanov
 Czech Republic
 +420 477 071 500
sales.cz@ligman.com

ASIA PACIFIC
 LIGMAN Lighting Co.,Ltd.
 17/2 Moo4 Monthong
 Bangnampreaw
 24150, Chachoengsao
 Thailand
 +66 2 108 6700
info@ligman.com