

MARVEL



Minimal, discrete post top luminaire. Featuring 360°, 270°, 180°, 90° or 90°x90° beam distribution for uninterrupted pedestrian lighting.



microPrim™


Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency PMMA lens
- Remote control gear driver is included
- Driver is to be installed within the pole-head. Please contact the factory for pole compatibility.


Feature




Optic

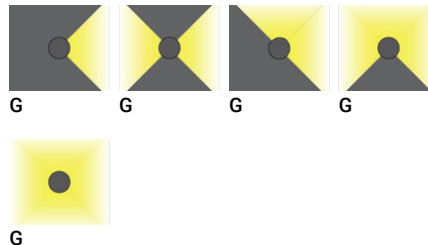

Product colour

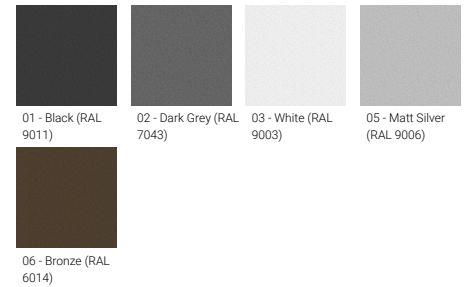

Special finishes upon request

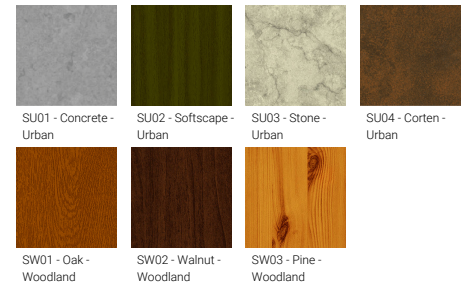



MARVEL

Technical information


	Model number	Light source	Power	Lumen	Optic	CCT / CRI	Dimming type	Weight
Top Ø300 mm - Optic 180° - Supplied with a cylindrical, straight aluminium pole - Height option: 2.5 m								
MARVEL 4	MAV-20013	12 LED	20 W	2164 - 2278 lm	G [77°X 96°]	3000K CRI80, 4000K CRI80	On/Off, DALI	4.9 kg
Top Ø300 mm - Optic 270° - Supplied with a cylindrical, straight aluminium pole - Height option: 2.5 m								
MARVEL 4	MAV-20014	18 LED	23 W	2576 - 2712 lm	G [88°X 134°]	3000K CRI80, 4000K CRI80	On/Off, DALI	4.9 kg
Top Ø300 mm - Optic 360° - Supplied with a cylindrical, straight aluminium pole - Height option: 2.5 m								
MARVEL 4	MAV-20015	24 LED	35 W	3810 - 4011 lm	G [91°X 134°]	3000K CRI80, 4000K CRI80	On/Off, DALI	4.9 kg
Top Ø300 mm - Optic 90° - Supplied with a cylindrical, straight aluminium pole - Height option: 2.5 m								
MARVEL 4	MAV-20011	6 LED	11 W	1096 - 1153 lm	G [120°X 92°]	3000K CRI80, 4000K CRI80	On/Off, DALI	4.9 kg
Top Ø300 mm - Optic 90° x 90° - Supplied with a cylindrical, straight aluminium pole - Height option: 2.5 m								
MARVEL 4	MAV-20012	12 LED	20 W	2151 - 2264 lm	G [137°X 89°]	3000K CRI80, 4000K CRI80	On/Off, DALI	4.9 kg


Accessory

		
	2.5 m - Cylindrical, straight aluminium pole for MARVEL APD125070-MARVEL	DALI Control System Control-DALI
MAV-20011	•	•
MAV-20012	•	•
MAV-20013	•	•
MAV-20014	•	•
MAV-20015	•	•

MARVEL

MAV-20011, MAV-20012, MAV-20013
MAV-20014, MAV-20015

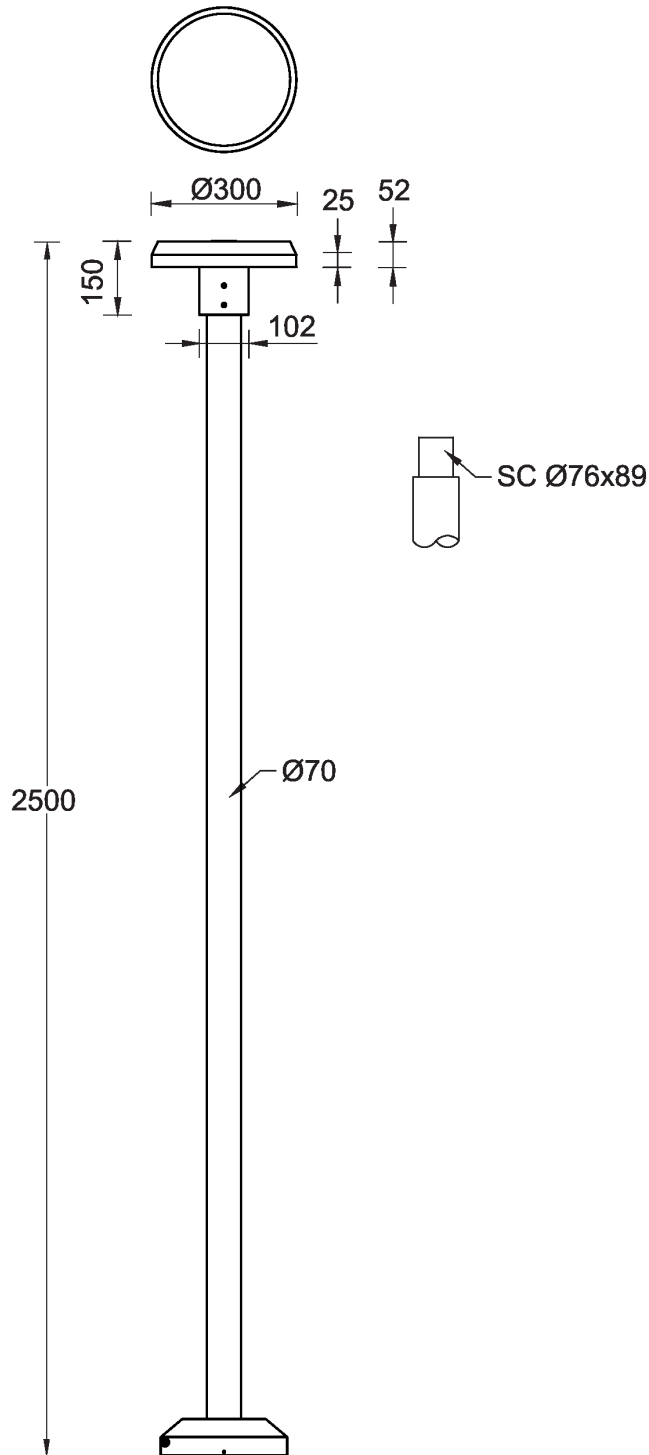

MARVEL

MARVEL
Bollards

Modern, discrete way-finding bollard luminaire. Featuring 360°, 270°, 180°, 90° or 90°x90° beam distribution for uninterrupted pedestrian lighting.

<https://www.ligman.com/marvel-bollards-ma-bo3/>



MARVEL
Light columns

Minimalist Light Column. Featuring 360°, 270°, 180°, 90° or 90°x90° beam distribution for uninterrupted public open space and pedestrian lighting.

<https://www.ligman.com/marvel-light-columns-ma-li3/>