

MELBOURNE




Discreet family of in-ground luminaires. Available in a range of beam angles and lumen outputs with corresponding housing size, adjustable optics, and RGBW for complete creative control.




Luminaire Structure

- Die-cast stainless steel in grade 316
- Body is pre-treated before powder coating ensuring high corrosion resistance
- Front ring in grade 316 stainless steel
- Externally adjustable: Tilt 25°, Rotation 360° for MEL-60051, MEL-60052, MEL-60053, MEL-60061, MEL-60062, MEL-60063
- Single cable entry, through wiring upon request
- Stainless steel fasteners in grade 316
- Durable silicone rubber gasket
- High-efficiency PMMA lens
- Clear, 15mm thick, toughened glass
- Integral control gear
- Recessing box in high-density polyethylene is included
- Suitable for drive-over with a maximum load of 5000 kg
- Vehicles with pneumatic tires can drive over the luminaire but the speed must not exceed 50 km/h
- Load is transferred by the housing to the foundation
- One glass suction cup for easy installation is included in each item list on the order
- The distance between the luminaire and the illuminated surface should be at least 0.5 m

Feature

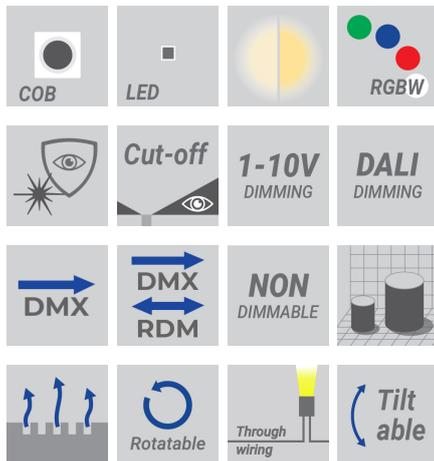

Optic

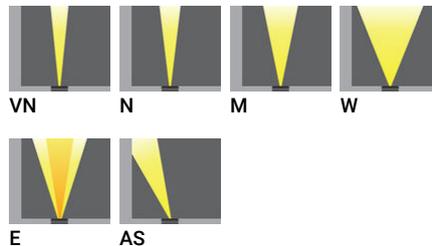

Product colour



MELBOURNE

Technical information

	Model number	Light source	Power	Lumen	Optic	CCT / CRI	Dimming type	Weight
Ø215 - With recessing box / driver								
MELBOURNE 4	MEL-60031	3 COB	25 W	2448 - 3255 lm	M [24°, W [45°], E [52°x33°], AS [53°x47°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	11.0 kg
MELBOURNE 4	MEL-60033	3 LED	20 W	1452 - 1528 lm	VN [8°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	11.0 kg
Ø215 - With recessing box / driver - Adjustable: Tilt 25° / Rotation 360°								
MELBOURNE 6	MEL-60051	1 COB	20 W	1855 - 2287 lm	M [24°, W [49°], E [53°x33°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	11.0 kg
MELBOURNE 6	MEL-60053	1 LED	11 W	699 - 736 lm	VN [8°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	11.0 kg
Ø215 - With recessing box / driver - RGBW - Adjustable: Tilt 25° / Rotation 360°								
MELBOURNE 6	MEL-60052	1 LED	11 W	313 - 395 lm	N [12°, W [37°]	RGBW30, RGBW40	DMX, DMX/RDM	11.0 kg
Ø290 - With recessing box / driver								
MELBOURNE 5	MEL-60041	6 COB	50 W	5580 - 7015 lm	M [24°, W [45°], E [51°x33°], AS [53°x42°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	17.0 kg
MELBOURNE 5	MEL-60043	7 LED	30 W	2802 - 2950 lm	VN [8°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	17.0 kg
Ø290 - With recessing box / driver - Adjustable: Tilt 25° / Rotation 360°								
MELBOURNE 7	MEL-60061	3 COB	33 W	3664 - 4602 lm	M [24°, W [47°], E [51°x33°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	17.0 kg
MELBOURNE 7	MEL-60063	3 LED	24 W	1662 - 1749 lm	VN [8°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	17.0 kg
Ø290 - With recessing box / driver - RGBW								
MELBOURNE 5	MEL-60042	6 LED	45 W	1573 - 2008 lm	N [12°, W [37°]	RGBW30, RGBW40	DMX, DMX/RDM	17.0 kg
Ø290 - With recessing box / driver - RGBW - Adjustable: Tilt 25° / Rotation 360°								
MELBOURNE 7	MEL-60062	3 LED	30 W	893 - 1157 lm	N [12°, W [37°]	RGBW30, RGBW40	DMX, DMX/RDM	17.0 kg

Accessory

							
	Glass suction cup A614491	Anti slip glass A62112	Anti slip glass A62212	Honeycomb louvre A62421	Honeycomb louvre A62521	DALI Control System Control-DALI	DMX Control System Control-DMX
MEL-60031	•	•		•		•	
MEL-60033	•	•		•		•	
MEL-60041	•		•		•	•	
MEL-60042	•		•		•		•

We reserve the right to make technical and design changes.

09:33, 26-02-2026

<https://www.ligman.com/melbourne-in-ground-luminaires-me-in-3/>

THAILAND
LIGMAN Lighting Co.,Ltd.
17/2 Moo 4, Monthong, Bang Nam Prio,
24150 Chachoengsao - Thailand
info@ligman.com



MELBOURNE

MEL-60043	•		•		•	•
MEL-60051	•	•		•		•
MEL-60052	•	•		•		•
MEL-60053	•	•		•		•
MEL-60061	•		•		•	•
MEL-60062	•		•		•	•
MEL-60063	•		•		•	•



DMX/RDM Control System
Control-DMX-RDM

MEL-60031	
MEL-60033	
MEL-60041	
MEL-60042	•
MEL-60043	
MEL-60051	
MEL-60052	•
MEL-60053	
MEL-60061	
MEL-60062	•
MEL-60063	

MELBOURNE

