


NYBRO JUNCTION



Angles and intersection joint units for the NYBRO system. Style NYBRO in creative patterns or to follow the building form.

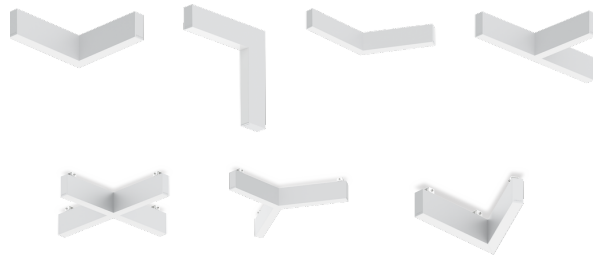


microPrim™


Luminaire structure

- Die-cast aluminium end-caps and extruded aluminium profile with powder coating
- Passive thermal management
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- PMMA diffuser with Opal (UGR <19) and micro prismatic (UGR <13) options for better glare control
- Integral control gear
- Stainless steel brackets and screws for mounting
- Up and down light distribution options
- Wireless control available through Bluetooth connection
- Daylight and occupancy sensor options


Feature

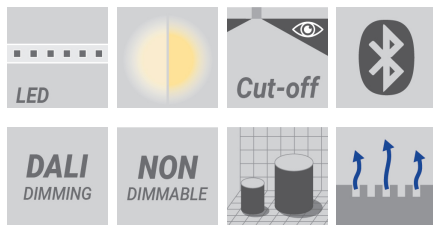


Optic



Product colour



Special finishes upon request

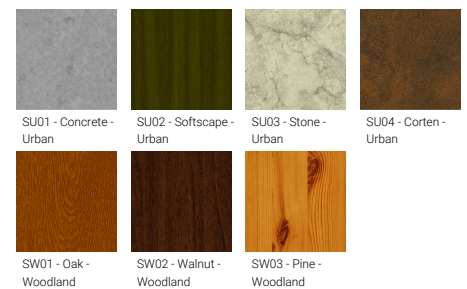

NYBRO JUNCTION

Technical information

	Model number	Light source	Power	Lumen	Optic	CCT / CRI	Dimming type	Weight	
Down (Optic) & Up (Optic 2nd) - L120° - 40x95 mm - 542 mm									
	NYBRO 15	NYB-80841-SU	84 & 72 LED	22 W	2000 - 2209 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, DALI	2.6 kg
	NYBRO 15	NYB-80842-SU	84 & 72 LED	30 W	2660 - 2935 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, DALI	2.6 kg
Down (Optic) & Up (Optic 2nd) - L120° - 60x95 mm - 552 mm									
	NYBRO 15	NYB-80861-SU	84 & 72 LED	30 W	2933 - 3308 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, DALI	3.4 kg
	NYBRO 15	NYB-80862-SU	84 & 72 LED	43 W	4051 - 4567 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, DALI	3.4 kg
Down (Optic) & Up (Optic 2nd) - L90° - 40x95 mm - 336 mm									
	NYBRO 12	NYB-80781-SU	72 & 60 LED	20 W	1493 - 1650 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, DALI	2.6 kg
	NYBRO 12	NYB-80782-SU	72 & 60 LED	26 W	1986 - 2191 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, DALI	2.6 kg
Down (Optic) & Up (Optic 2nd) - L90° - 60x95 mm - 345 mm									
	NYBRO 12	NYB-80801-SU	60 & 72 LED	26 W	2481 - 2799 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, DALI	3.4 kg
	NYBRO 12	NYB-80802-SU	60 & 72 LED	37 W	3428 - 3864 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, DALI	3.4 kg
Down (Optic) & Up (Optic 2nd) - T90° - 40x95 mm - 335 mm									
	NYBRO 18	NYB-80901-SU	108 & 96 LED	29 W	2308 - 2550 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, DALI	3.5 kg
	NYBRO 18	NYB-80902-SU	108 & 96 LED	35 W	3069 - 3386 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, DALI	3.5 kg
Down (Optic) & Up (Optic 2nd) - T90° - 60x95 mm - 345 mm									
	NYBRO 18	NYB-80921-SU	108 & 96 LED	41 W	4270 - 4816 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, DALI	4.4 kg
	NYBRO 18	NYB-80922-SU	108 & 96 LED	59 W	6016 - 6783 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, DALI	4.4 kg
Down (Optic) & Up (Optic 2nd) - V60° - 40x95 mm - 387 mm									
	NYBRO 27	NYB-81121-SU	84 & 60 LED	20 W	1800 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, DALI	3.1 kg
	NYBRO 27	NYB-81122-SU	84 & 60 LED	28 W	2390 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, DALI	3.1 kg
Down (Optic) & Up (Optic 2nd) - V60° - 60x95 mm - 404 mm									
	NYBRO 27	NYB-81141-SU	84 & 60 LED	28 W	3053 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, DALI	3.7 kg
	NYBRO 27	NYB-81142-SU	84 & 60 LED	43 W	4215 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, DALI	3.7 kg
Down (Optic) & Up (Optic 2nd) - X90° - 40x95 mm - 630 mm									
	NYBRO 21	NYB-80961-SU	144 & 132 LED	37 W	3122 - 3449 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, DALI	4.3 kg
	NYBRO 21	NYB-80962-SU	144 & 132 LED	50 W	4151 - 4580 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, DALI	4.3 kg
Down (Optic) & Up (Optic 2nd) - X90° - 60x95 mm - 630 mm									
	NYBRO 21	NYB-80981-SU	144 & 132 LED	56 W	5777 - 6516 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, DALI	5.3 kg
	NYBRO 21	NYB-80982-SU	144 & 132 LED	79 W	8126 - 9161 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, DALI	5.3 kg
Down (Optic) & Up (Optic 2nd) - Y120° - 40x95 mm - 502 mm									

We reserve the right to make technical and design changes.

07:09, 13-06-2026

<https://www.ligman.com/nybro-junction-surface-ceiling-luminaires-nyb-cei3/>

THAILAND

LIGMAN Lighting Co.,Ltd.
17/2 Moo 4, Monthong, Bang Nam Prioa,
24150 Chachoengsao - Thailand
info@ligman.com



NYBRO JUNCTION

NYBRO 24	NYB-81021-SU	120 & 108 LED	31 W	2580 - 2850 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, DALI	3.7 kg
NYBRO 24	NYB-81022-SU	120 & 108 LED	42 W	3431 - 3785 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, DALI	3.7 kg
Down (Optic) & Up (Optic 2nd) - Y120° - 60x95 mm - 518 mm								
NYBRO 24	NYB-81041-SU	120 & 108 LED	45 W	4773 - 5383 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, DALI	4.8 kg
NYBRO 24	NYB-81042-SU	120 & 108 LED	66 W	6721 - 7577 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, DALI	4.8 kg
Down - L120° - 40x80 mm - 542 mm								
NYBRO 15	NYB-80831-SU	84 LED	11 W	866 - 1050 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, DALI	1.8 kg
NYBRO 15	NYB-80832-SU	84 LED	16 W	1152 - 1394 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, DALI	1.8 kg
Down - L120° - 60x80 mm - 552 mm								
NYBRO 15	NYB-80851-SU	84 LED	12 W	1067 - 1338 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, DALI	3.0 kg
NYBRO 15	NYB-80852-SU	84 LED	16 W	1417 - 1781 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, DALI	3.0 kg
NYBRO 15	NYB-80853-SU	84 LED	24 W	1957 - 2458 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, DALI	3.0 kg
Down - L90° - 40x80 mm - 336 mm								
NYBRO 12	NYB-80771-SU	72 LED	11 W	742 - 900 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, DALI	1.8 kg
NYBRO 12	NYB-80772-SU	72 LED	14 W	987 - 1195 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, DALI	1.8 kg
Down - L90° - 40x80 mm - 350 mm								
NYBRO 12	NYB-81071-SU	72 LED	11 W	742 - 900 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, DALI	2.0 kg
NYBRO 12	NYB-81072-SU	72 LED	14 W	987 - 1195 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, DALI	2.0 kg
Down - L90° - 60x80 mm - 345 mm								
NYBRO 12	NYB-80791-SU	72 LED	11 W	915 - 1147 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, DALI	3.0 kg
NYBRO 12	NYB-80792-SU	72 LED	14 W	1215 - 1527 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, DALI	3.0 kg
NYBRO 12	NYB-80793-SU	72 LED	19 W	1677 - 2108 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, DALI	3.0 kg
Down - L90° corner - 60x80 mm - 350 mm								
NYBRO 12	NYB-81081-SU	72 LED	11 W	915 - 1147 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, DALI	2.5 kg
NYBRO 12	NYB-81082-SU	72 LED	14 W	1215 - 1527 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, DALI	2.5 kg
NYBRO 12	NYB-81083-SU	72 LED	19 W	1677 - 2108 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, DALI	2.5 kg
Down - T90° - 40x80 mm - 335 mm								
NYBRO 18	NYB-80891-SU	108 LED	15 W	1114 - 1350 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, DALI	2.5 kg
NYBRO 18	NYB-80892-SU	108 LED	19 W	1482 - 1793 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, DALI	2.5 kg
Down - T90° - 60x80 mm - 345 mm								
NYBRO 18	NYB-80911-SU	108 LED	15 W	1476 - 1850 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, DALI	3.8 kg
NYBRO 18	NYB-80912-SU	108 LED	21 W	2028 - 2550 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, DALI	3.8 kg
NYBRO 18	NYB-80913-SU	108 LED	31 W	2857 - 3590 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, DALI	3.8 kg

We reserve the right to make technical and design changes.

07:09, 13-06-2026

<https://www.ligman.com/nybro-junction-surface-ceiling-luminaires-nyb-cei3/>

THAILAND





LIGMAN Lighting Co.,Ltd.
17/2 Moo 4, Monthong, Bang Nam Prio, 24150 Chachoengsao - Thailand
info@ligman.com



NYBRO JUNCTION

Down - V60° - 40x80 mm - 387 mm								
NYBRO 27	NYB-81111-SU	84 LED	11 W	1050 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, DALI	2.1 kg
NYBRO 27	NYB-81112-SU	84 LED	16 W	1394 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, DALI	2.1 kg
Down - V60° - 60x80 mm - 404 mm								
NYBRO 27	NYB-81131-SU	84 LED	12 W	1338 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, DALI	2.7 kg
Down - V60° - 60x80 mm - 404 mm								
NYBRO 27	NYB-81132-SU	84 LED	16 W	1781 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, DALI	2.7 kg
NYBRO 27	NYB-81133-SU	84 LED	24 W	2459 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, DALI	2.7 kg
Down - X90° - 40x80 mm - 630 mm								
NYBRO 21	NYB-80951-SU	144 LED	19 W	1742 - 1800 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, DALI	3.1 kg
NYBRO 21	NYB-80952-SU	144 LED	25 W	1975 - 2390 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, DALI	3.1 kg
Down - X90° - 60x80 mm - 630 mm								
NYBRO 21	NYB-80971-SU	144 LED	19 W	1830 - 2293 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, DALI	4.5 kg
NYBRO 21	NYB-80972-SU	144 LED	25 W	2429 - 3055 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, DALI	4.5 kg
NYBRO 21	NYB-80973-SU	144 LED	37 W	3355 - 4215 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, DALI	4.5 kg
Down - Y120° - 40x80 mm - 502 mm								
NYBRO 24	NYB-81011-SU	120 LED	16 W	1342 - 1682 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, DALI	2.9 kg
NYBRO 24	NYB-81012-SU	120 LED	24 W	1879 - 2362 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, DALI	2.9 kg
Down - Y120° - 60x80 mm - 518 mm								
NYBRO 24	NYB-81031-SU	120 LED	16 W	1446 - 1812 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, DALI	3.5 kg
NYBRO 24	NYB-81032-SU	120 LED	24 W	2023 - 2544 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, DALI	3.5 kg
NYBRO 24	NYB-81033-SU	120 LED	36 W	2863 - 3597 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, DALI	3.5 kg

Accessory

	 Ceiling-mounting bracket A81281	 Continuous-coupler bracket (60/70 mm Down & 60 mm Down & Up profile) A81581	 Continuous-coupler bracket (40/50 mm Down profile) A81881	 DALI Control System Control-DALI
NYB-80771-SU	•		•	•
NYB-80772-SU	•		•	•
NYB-80781-SU			•	•
NYB-80782-SU			•	•
NYB-80791-SU	•	•		•
NYB-80792-SU	•	•		•
NYB-80793-SU	•	•		•
NYB-80801-SU		•		•
NYB-80802-SU		•		•
NYB-80831-SU	•		•	•

We reserve the right to make technical and design changes.

07:09, 13-06-2026

<https://www.ligman.com/nybro-junction-surface-ceiling-luminaires-nyb-cei3/>

THAILAND

LIGMAN Lighting Co.,Ltd.
17/2 Moo 4, Monthong, Bang Nam Prio, 24150 Chachoengsao - Thailand
info@ligman.com



NYBRO JUNCTION

NYB-80832-SU	•		•	•
NYB-80841-SU			•	•
NYB-80842-SU			•	•
NYB-80851-SU	•			•
NYB-80852-SU	•	•		•
NYB-80853-SU	•	•		•
NYB-80861-SU		•		•
NYB-80862-SU		•		•
NYB-80891-SU	•		•	•
NYB-80892-SU	•		•	•
NYB-80901-SU			•	•
NYB-80902-SU			•	•
NYB-80911-SU	•	•		•
NYB-80912-SU	•	•		•
NYB-80913-SU	•	•		•
NYB-80921-SU		•		•
NYB-80922-SU		•		•
NYB-80951-SU	•		•	•
NYB-80952-SU	•		•	•
NYB-80961-SU			•	•
NYB-80962-SU			•	•
NYB-80971-SU	•	•		•
NYB-80972-SU	•	•		•
NYB-80973-SU	•	•		•
NYB-80981-SU		•		•
NYB-80982-SU		•		•
NYB-81011-SU	•		•	•
NYB-81012-SU	•		•	•
NYB-81021-SU			•	•
NYB-81022-SU			•	•
NYB-81031-SU	•	•		•
NYB-81032-SU	•	•		•
NYB-81033-SU	•	•		•
NYB-81041-SU		•		•
NYB-81042-SU		•		•
NYB-81071-SU			•	•
NYB-81072-SU			•	•
NYB-81081-SU		•		•
NYB-81082-SU		•		•
NYB-81083-SU		•		•
NYB-81111-SU	•		•	•
NYB-81112-SU	•		•	•
NYB-81121-SU			•	•
NYB-81122-SU			•	•
NYB-81131-SU	•	•		•
NYB-81132-SU	•	•		•
NYB-81133-SU	•	•		•
NYB-81141-SU		•		•
NYB-81142-SU		•		•

We reserve the right to make technical and design changes.


07:09, 13-06-2026

<https://www.ligman.com/nybro-junction-surface-ceiling-luminaires-nyb-cei3/>

THAILAND
 LIGMAN Lighting Co.,Ltd.
 17/2 Moo 4, Monthong, Bang Nam Prio, 24150 Chachoengsao - Thailand
info@ligman.com



NYBRO JUNCTION

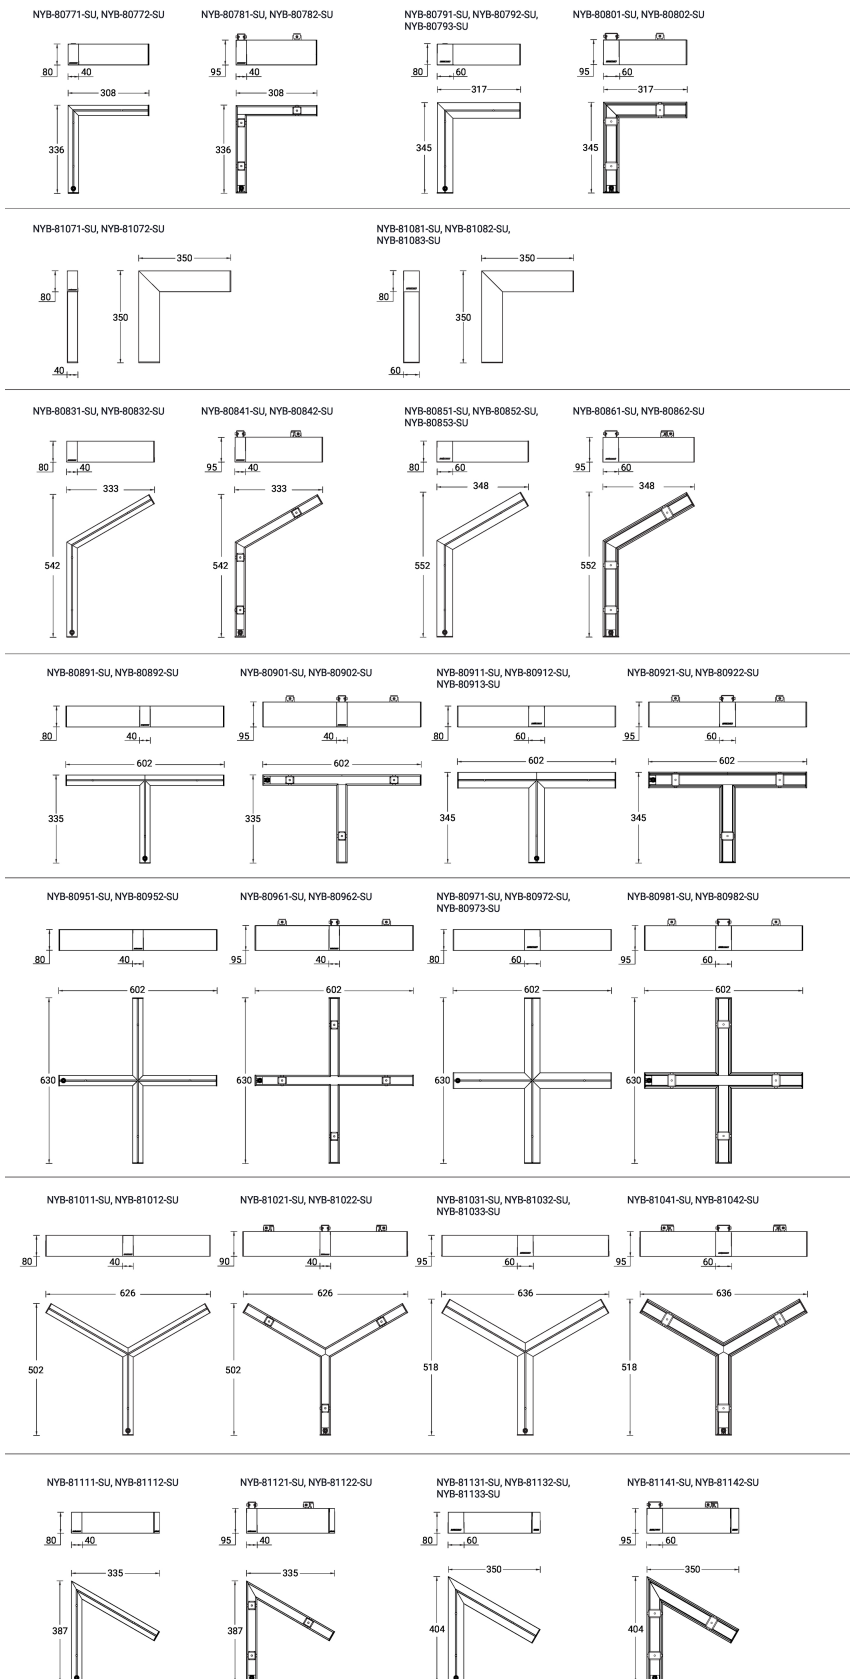

We reserve the right to make technical and design changes.


07:09, 13-06-2026

<https://www.ligman.com/nybro-junction-surface-ceiling-luminaires-nyb-cei3/>

THAILAND
 LIGMAN Lighting Co.,Ltd.
 17/2 Moo 4, Monthong, Bang Nam Prio,
 24150 Chachoengsao - Thailand
info@ligman.com




NYBRO JUNCTION

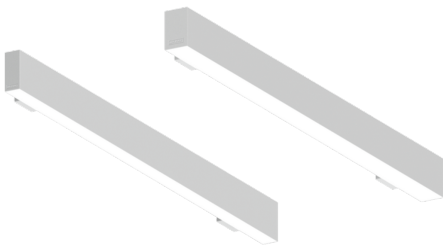

NYBRO
Surface wall luminaires

Pendant, surface and recessed interior lighting system. Powerful, flexible continuous illumination with a myriad of light source and control options.


<https://www.ligman.com/nybro-surface-wall-luminaires-ny-sur3/>

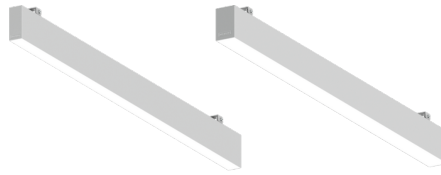

NYBRO
Surface ceiling luminaires

Pendant, surface and recessed interior lighting system. Powerful, flexible continuous illumination with a myriad of light source and control options.


<https://www.ligman.com/nybro-surface-ceiling-luminaires-ny-cei3/>

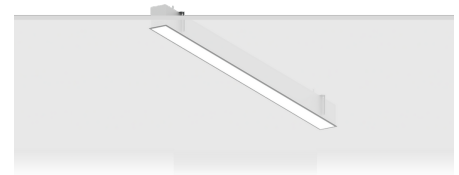

NYBRO
Recessed ceiling luminaires

Pendant, surface and recessed interior lighting system. Powerful, flexible continuous illumination with a myriad of light source and control options.


<https://www.ligman.com/nybro-recessed-ceiling-luminaires-ny-rec3/>

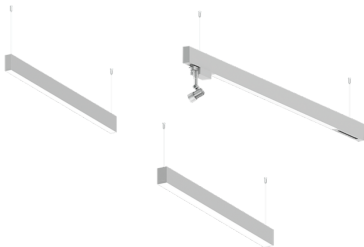

NYBRO
Pendant luminaires

Pendant, surface and recessed interior lighting system. Powerful, flexible continuous illumination with a myriad of light source and control options.


<https://www.ligman.com/nybro-pendant-luminaires-ny-pen3/>

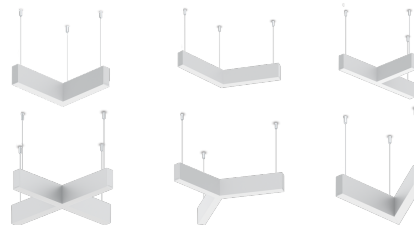

NYBRO JUNCTION
Pendant luminaires

Angles and intersection joint units for the NYBRO system. Style NYBRO in creative patterns or to follow the building form.

<https://www.ligman.com/nybro-junction-pendant-luminaires-nyb-pen3/>

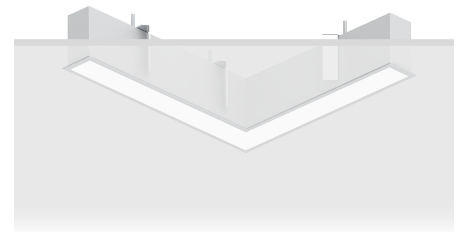

NYBRO JUNCTION
Recessed ceiling luminaires

Angles and intersection joint units for the NYBRO system. Style NYBRO in creative patterns or to follow the building form.

<https://www.ligman.com/nybro-junction-recessed-ceiling-luminaires-nyb-rec3/>