



Miniature contemporary underwater recessed luminaires. Beautifully engineered minimalistic.



Luminaire Structure

- Stainless steel body in grade 316
- Single cable entry
- Stainless steel fasteners in grade 316
- Durable silicone rubber gasket
- Clear toughened glass

Remote driver is included for constant current (CC) products and is not IP-rated
Remote box IP-rated is not included and is to be ordered separately for constant current (CC)

products

- Recessing box in high-density polyethylene is included


- Luminaire must be submerged when operational - Maximum depth 1 m

- Outdoor cable needs to be ordered with a specific length

Feature



Optic



Product colour

00 - Stainless Steel

We reserve the right to make technical and design changes.


01:45, 16-05-2024




Technical information

Without remote box IP-rated - With remote driver / recessing box - Constant current (CC) 500 mA OREGON 1 OR-60895 1 LED 2 W 191 - 201 lm N [22°] 2700K CRI80, 3000K CRI80, 4000K CRI80, 4000K CRI80, 4000K CRI80 On/Off, 1-10V, DALI 0.6 kg Without remote driver - With recessing box - Constant voltage (CV) 24 V V 08 - 000K CRI80, 4000K CRI80, 400K CRI80, 400K CRI80, 4		Model number	Light source	Power	Lumen	Optic	CCT / CRI	Dimming type	Weight		
OREGON 1 OR-60895 1 LED 2 W 191 - 201 lm N [22°] 3000K CRI80, 4000K CRI80, 4000K CRI80, 4000K CRI80, 4000K CRI80, 4000K CRI80 0.6 kg Without remote driver - With recessing box - Constant voltage (CV) 24 V 0REGON 1 OR-60894 1 LED 2 W 191 - 201 lm N [22°] 3000K CRI80, 4000K CRI80, 4000K CRI80, 4000K CRI80, 4000K CRI80 On/Off 0.6 kg Without remote driver - With recessing box - Constant voltage (CV) 24 V - RGBW OREGON 1 OR-60896 1 LED 5 W 224 lm M [33°] RGBW30, RGBW40 DMX, DMX/RDM 0.6 kg	Without remote box IP-rated - With remote driver / recessing box - Constant current (CC) 500 mA										
OREGON 1 OR-60894 1 LED 2 W 191 - 201 lm N [22°] 3000K CRI80, 4000K CRI80 On/Off 0.6 kg Without remote driver - With recessing box - Constant voltage (CV) 24 V - RGBW OREGON 1 OR-60896 1 LED 5 W 224 lm M [33°] RGBW30, RGBW40 DMX, DMX/RDM 0.6 kg	OREGON 1	OR-60895	1 LED	2 W	191 - 201 lm	N [22°]	3000K CRI80,		0.6 kg		
OREGON 1 OR-60894 1 LED 2 W 191 - 201 lm N [22°] 3000K CRI80, 4000K CRI80 On/Off 0.6 kg Without remote driver - With recessing box - Constant voltage (CV) 24 V - RGBW OREGON 1 OR-60896 1 LED 5 W 224 lm M [33°] RGBW30, RGBW40 DMX, DMX/RDM 0.6 kg											
OREGON 1 OR-60894 I LED 2 W I 91 - 20 T Im N [22*] 4000K CRI80 On/Off 0.6 kg Without remote driver - With recessing box - Constant voltage (CV) 24 V - RGBW OREGON 1 OR-60896 1 LED 5 W 224 Im M [33°] RGBW30, RGBW40 DMX, DMX/RDM 0.6 kg	without remote driver - with recessing box - constant voltage (cv) 24 v										
OREGON 1 OR-60896 1 LED 5 W 224 lm M [33°] RGBW30, RGBW40 DMX, DMX/RDM 0.6 kg	OREGON 1	OR-60894	1 LED	2 W	191 - 201 lm	N [22°]	,	On/Off	0.6 kg		
OREGON 1 OR-60896 1 LED 5 W 224 lm M [33°] RGBW30, RGBW40 DMX, DMX/RDM 0.6 kg											
OREGON 1 OR-60896 1 LED 5 W 224 lm M [33°] RGBW30, RGBW40 DMX, DMX/RDM 0.6 kg	Without remote driver - With recessing box - Constant voltage (CV) 24 V - RGBW										
	OREGON 1	OR-60896	1 LED	5 W	224 lm	M [33°]	RGBW30, RGBW40	DMX, DMX/RDM	0.6 kg	DM	

Accessories

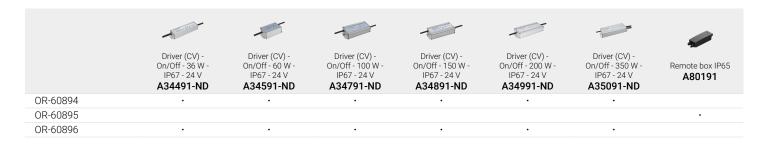

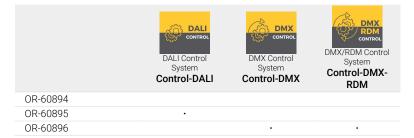


We reserve the right to make technical and design changes.

01:45, 16-05-2024



OR-60894, OR-60895, OR-60896

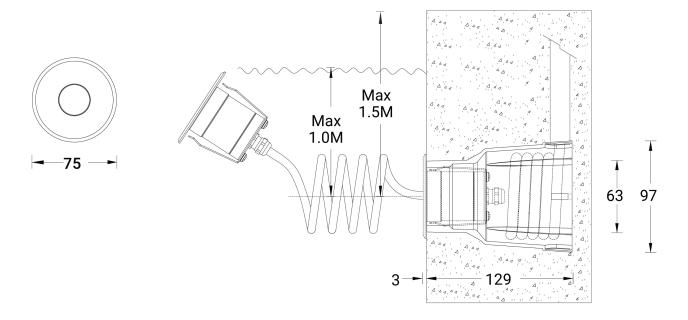

We reserve the right to make technical and design changes.

01:45, 16-05-2024