

# OTTAWA



**Commercial urban space column. Sharp and elegant column design which makes a visual statement in the daytime and casts gentle clover-leaf patterns at night.**

## Luminaire Structure

- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- One IP68 connector supplied with 0.3 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency optical reflector
- Clear toughened glass
- High-efficiency polycarbonate lens
- Maximum wind load resistance is 160 km/h
- Surge protection 10kV



## Feature



## Light symbol

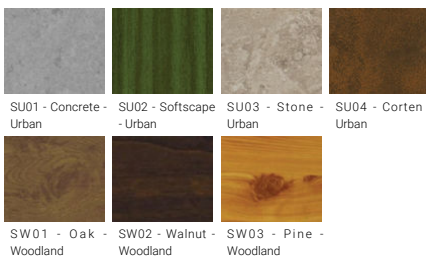


G

## Product colour



## Special finishes upon request



We reserve the right to make technical and design changes.

01:30, 25-10-2022

<https://www.ligman.com/ottawa-light-columns-ot-li3/>

**Europe**  
LIGMAN EUROPE s.r.o.  
VGP Park Ústí nad Labem  
P 2 120  
40317, Přestanov  
Czech Republic  
+420 477 071 500  
[sales.cz@ligman.com](mailto:sales.cz@ligman.com)




**ASIA PACIFIC**  
LIGMAN Lighting Co.,Ltd.  
17/2 Moo4 Monthong  
Bangnampreaw  
24150, Chachoengsao  
Thailand  
+66 2 108 6700  
[info@ligman.com](mailto:info@ligman.com)



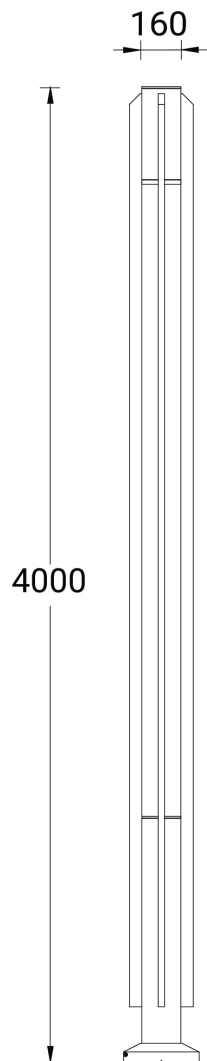
# OTTAWA

## Technical information

	Model number	Light source	Power	Lumen	Optic	CCT / CRI	Dimming type	Weight	
<b>Ø160 - 4000 mm</b>									
	OTTAWA 2	<b>OT-20953</b>	1 COB	29 W	1938 - 2073 lm	G [54°]	3000K CRI80, 4000K CRI80	DALI, 1-10V, On/Off	23.4 kg
	OTTAWA 2	<b>OT-20954</b>	1 COB	39 W	2263 - 2422 lm	G [54°]	3000K CRI80, 4000K CRI80	DALI, 1-10V, On/Off	23.6 kg
	OTTAWA 4	<b>OT-20961</b>	1 COB	20 W	1960 - 2108 lm	G [148°]	3000K CRI80, 4000K CRI80	DALI, 1-10V, On/Off	23.4 kg
	OTTAWA 4	<b>OT-20962</b>	1 COB	40 W	2745 - 2952 lm	G [148°]	3000K CRI80, 4000K CRI80	DALI, 1-10V, On/Off	23.6 kg

## Accessories

	 Root mount kit <b>A20691</b>	 Circuit breaker box IP44 <b>A21291</b>	 DALI Control System <b>Control-DALI</b>
OT-20953	•	•	•
OT-20954	•	•	•
OT-20961	•	•	•
OT-20962	•	•	•

**OTTAWA****OTTAWA****OTTAWA 1****Mounting detail**

We reserve the right to make technical and design changes.

01:30, 25-10-2022

<https://www.ligman.com/ottawa-light-columns-ot-li3/>

**Europe**  
LIGMAN EUROPE s.r.o.  
VGP Park Ústí nad Labem  
P 2 120  
40317, Přestanov  
Czech Republic  
+420 477 071 500  
[sales.cz@ligman.com](mailto:sales.cz@ligman.com)

**ASIA PACIFIC**  
LIGMAN Lighting Co.,Ltd.  
17/2 Moo4 Monthong  
Bangnampreaw  
24150, Chachoengsao  
Thailand  
+66 2 108 6700  
[info@ligman.com](mailto:info@ligman.com)

# OTTAWA



OTTAWA  
**Bollards**

Commercial urban space bollard. Sharp and elegant bollard design which makes a visual statement in the daytime and casts gentle clover-leaf patterns at night.

<https://www.ligman.com/ottawa-bollards-ot-bo3/>