

OULU



Unique family of curved extruded linear fixtures. Release your imagination, designing spaces with multiple curves in the OULU range.




Luminaire Structure

- Extruded aluminium bended profile with powder coating
- Stainless steel fasteners in grade 316
- Stainless steel brackets and screws for mounting


- Opal PMMA diffuser (UGR <19) for glare control
- Up and down light distribution options
- Passive thermal management
- Integral control gear
- Remote driver is included for dimming type: 1-10V (-DI)

- Wireless control available through Bluetooth connection
- Daylight and occupancy sensor options


Feature

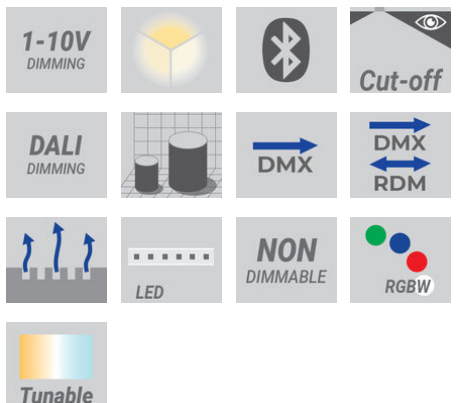


Optic



Product colour



Special finishes upon request

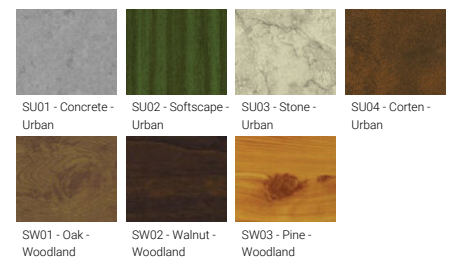

OULU

Technical information

	Model number	Light source	Power	Lumen	Optic	CCT / CRI	Dimming type	Weight	
Down - 180° - R1000									
OULU 1	OUL-80031	384 LED	54 W	5231 - 5460 lm	O [Opal]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	8.0 kg	
Down - 180° - R1000 - RGBW									
OULU 1	OUL-80033	960 LED	54 W	1911 lm	O [Opal]	RGBW40	Bluetooth	7.7 kg	
Down - 180° - R1000 - RGBW DMX									
OULU 1	OUL-80034	960 LED	54 W	1911 lm	O	RGBW40	DMX, DMX/RDM	7.7 kg	
Down - 180° - R1000 - TW									
OULU 1	OUL-80032	768 LED	54 W	5460 lm	O	TW (2700K - 6500K)	DALI	8.0 kg	
Down - 180° - R500									
OULU 1	OUL-80011	192 LED	27 W	2618 - 2733 lm	O [Opal]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	4.2 kg	
Down - 180° - R500 - RGBW									
OULU 1	OUL-80013	480 LED	27 W	956 lm	O [Opal]	RGBW40	Bluetooth	4.0 kg	
Down - 180° - R500 - RGBW DMX									
OULU 1	OUL-80014	480 LED	27 W	956 lm	O	RGBW40	DMX, DMX/RDM	4.0 kg	
Down - 180° - R500 - TW									
OULU 1	OUL-80012	384 LED	27 W	2732 lm	O	TW (2700K - 6500K)	DALI	4.2 kg	
Down - 180° - R750									
OULU 1	OUL-80021	288 LED	40 W	3924 - 4096 lm	O [Opal]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	6.1 kg	
Down - 180° - R750 - RGBW									
OULU 1	OUL-80023	768 LED	43 W	1434 lm	O [Opal]	RGBW40	Bluetooth	5.8 kg	
Down - 180° - R750 - RGBW DMX									
OULU 1	OUL-80024	768 LED	43 W	1434 lm	O	RGBW40	DMX, DMX/RDM	5.8 kg	
Down - 180° - R750 - TW									
OULU 1	OUL-80022	576 LED	40 W	4096 lm	O	TW (2700K - 6500K)	DALI	6.1 kg	
Down - 22.5° - R2000									
OULU 4	OUL-80311	96 LED	13 W	1266 - 1321 lm	O [Opal]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	2.4 kg	
Down - 22.5° - R2000 - RGBW									
OULU 4	OUL-80313	240 LED	13 W	462 lm	O [Opal]	RGBW40	Bluetooth	2.2 kg	
Down - 22.5° - R2000 - RGBW DMX									
OULU 4	OUL-80314	240 LED	13 W	462 lm	O	RGBW40	DMX, DMX/RDM	2.2 kg	
Down - 22.5° - R2000 - TW									

We reserve the right to make technical and design changes.








01:24, 21-04-2024

<https://www.ligman.com/oulu-recessed-ceiling-luminaires-ou-re-c3/>

THAILAND

LIGMAN Lighting Co.,Ltd.
17/2 Moo 4, Monthong, Bang Nam Prioao,
24150 Chachoengsao - Thailand
info@ligman.com

OULU

OULU 4	OUL-80312	192 LED	13 W	1321 lm	0	TW (2700K - 6500K)	DALI	2.4 kg	
OULU 4	OUL-80322	240 LED	16 W	1558 lm	0	TW (2700K - 6500K)	DALI	3.0 kg	
Down - 22.5° - R2500									
OULU 4	OUL-80321	120 LED	16 W	1492 - 1558 lm	0 [Opal]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	3.0 kg	
Down - 22.5° - R2500 - RGBW									
OULU 4	OUL-80323	344 LED	19 W	545 lm	0 [Opal]	RGBW40	Bluetooth	2.7 kg	
Down - 22.5° - R2500 - RGBW DMX									
OULU 4	OUL-80324	344 LED	19 W	545 lm	0	RGBW40	DMX, DMX/RDM	2.7 kg	
Down - 45° - R1500									
OULU 3	OUL-80221	144 LED	18 W	1663 - 1732 lm	0 [Opal]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	3.4 kg	
Down - 45° - R2000									
OULU 3	OUL-80231	192 LED	26 W	2615 - 2729 lm	0 [Opal]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	4.5 kg	
Down - 45° - R1000									
OULU 3	OUL-80201	96 LED	12 W	1208 - 1258 lm	0 [Opal]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	2.4 kg	
Down - 45° - R1000 - RGBW									
OULU 3	OUL-80203	240 LED	13 W	440 lm	0 [Opal]	RGBW40	Bluetooth	2.2 kg	
Down - 45° - R1000 - RGBW DMX									
OULU 3	OUL-80204	240 LED	13 W	440 lm	0	RGBW40	DMX, DMX/RDM	2.2 kg	
Down - 45° - R1000 - TW									
OULU 3	OUL-80202	192 LED	12 W	1258 lm	0	TW (2700K - 6500K)	DALI	2.4 kg	
Down - 45° - R1250									
OULU 3	OUL-80211	120 LED	16 W	1533 - 1597 lm	0 [Opal]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	3.0 kg	
OULU 3	OUL-80241	240 LED	33 W	3271 - 3415 lm	0 [Opal]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	5.4 kg	
Down - 45° - R1250 - RGBW									
OULU 3	OUL-80213	336 LED	19 W	559 lm	0 [Opal]	RGBW40	Bluetooth	2.7 kg	
Down - 45° - R1250 - RGBW DMX									
OULU 3	OUL-80214	336 LED	19 W	559 lm	0	RGBW40	DMX, DMX/RDM	2.7 kg	
Down - 45° - R1250 - TW									
OULU 3	OUL-80212	240 LED	16 W	1597 lm	0	TW (2700K - 6500K)	DALI	3.0 kg	
Down - 45° - R1500 - RGBW									
OULU 3	OUL-80223	384 LED	21 W	606 lm	0 [Opal]	RGBW40	Bluetooth	3.1 kg	
Down - 45° - R1500 - RGBW DMX									

We reserve the right to make technical and design changes.

01:24, 21-04-2024

<https://www.ligman.com/oulu-recessed-ceiling-luminaires-ou-re-c3/>

THAILAND

LIGMAN Lighting Co.,Ltd.
17/2 Moo 4, Monthong, Bang Nam Prioa,
24150 Chachoengsao - Thailand
info@ligman.com

OULU

OULU 3	OUL-80224	384 LED	21 W	606 lm	0	RGBW40	DMX, DMX/RDM	3.1 kg	
Down - 45° - R1500 - TW									
OULU 3	OUL-80222	288 LED	18 W	1732 lm	0	TW (2700K - 6500K)	DALI	3.4 kg	
Down - 45° - R2000 - RGBW									
OULU 3	OUL-80233	480 LED	27 W	956 lm	0 [Opal]	RGBW40	Bluetooth	4.1 kg	
Down - 45° - R2000 - RGBW DMX									
OULU 3	OUL-80234	480 LED	27 W	956 lm	0	RGBW40	DMX, DMX/RDM	4.1 kg	
Down - 45° - R2000 - TW									
OULU 3	OUL-80232	384 LED	26 W	2730 lm	0	TW (2700K - 6500K)	DALI	4.5 kg	
Down - 45° - R2500 - RGBW									
OULU 3	OUL-80243	688 LED	37 W	1195 lm	0 [Opal]	RGBW40	Bluetooth	5.0 kg	
Down - 45° - R2500 - RGBW DMX									
OULU 3	OUL-80244	688 LED	37 W	1195 lm	0	RGBW40	DMX, DMX/RDM	5.0 kg	
Down - 45° - R2500 - TW									
OULU 3	OUL-80242	480 LED	33 W	3414 lm	0	TW (2700K - 6500K)	DALI	5.4 kg	
Down - 90° - R1000									
OULU 2	OUL-80121	192 LED	26 W	2616 - 2730 lm	0 [Opal]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	4.4 kg	
Down - 90° - R1000 - RGBW									
OULU 2	OUL-80123	480 LED	26 W	956 lm	0 [Opal]	RGBW40	Bluetooth	4.4 kg	
Down - 90° - R1000 - RGBW DMX									
OULU 2	OUL-80124	480 LED	26 W	956 lm	0	RGBW40	DMX, DMX/RDM	4.4 kg	
Down - 90° - R1000 - TW									
OULU 2	OUL-80122	384 LED	26 W	2730 lm	0	TW (2700K - 6500K)	DALI	4.4 kg	
Down - 90° - R1250									
OULU 2	OUL-80131	240 LED	33 W	3271 - 3415 lm	0 [Opal]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	5.4 kg	
Down - 90° - R1250 - RGBW									
OULU 2	OUL-80133	672 LED	37 W	1195 lm	0 [Opal]	RGBW40	Bluetooth	5.0 kg	
Down - 90° - R1250 - RGBW DMX									
OULU 2	OUL-80134	672 LED	37 W	1195 lm	0	RGBW40	DMX, DMX/RDM	5.0 kg	
Down - 90° - R1250 - TW									
OULU 2	OUL-80132	480 LED	33 W	3414 lm	0	TW (2700K - 6500K)	DALI	5.4 kg	
Down - 90° - R500									

We reserve the right to make technical and design changes.




01:24, 21-04-2024

<https://www.ligman.com/oulu-recessed-ceiling-luminaires-ou-re-c3/>








THAILAND

LIGMAN Lighting Co.,Ltd.
17/2 Moo 4, Monthong, Bang Nam Prioao,
24150 Chachoengsao - Thailand
info@ligman.com

OULU

OULU 2	OUL-80101	96 LED	12 W	1204 - 1254 lm	O [Opal]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	2.4 kg	
Down - 90° - R500 - RGBW									
OULU 2	OUL-80103	240 LED	13 W	439 lm	O [Opal]	RGBW40	Bluetooth	2.3 kg	
Down - 90° - R500 - RGBW DMX									
OULU 2	OUL-80104	240 LED	13 W	439 lm	O	RGBW40	DMX, DMX/RDM	2.3 kg	
Down - 90° - R500 - TW									
OULU 2	OUL-80102	192 LED	12 W	1254 lm	O	TW (2700K - 6500K)	DALI	2.4 kg	
Down - 90° - R750									
OULU 2	OUL-80111	144 LED	18 W	1849 - 1926 lm	O [Opal]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	3.3 kg	
Down - 90° - R750 - RGBW									
OULU 2	OUL-80113	384 LED	21 W	674 lm	O [Opal]	RGBW40	Bluetooth	3.0 kg	
Down - 90° - R750 - RGBW DMX									
OULU 2	OUL-80114	384 LED	21 W	674 lm	O	RGBW40	DMX, DMX/RDM	3.0 kg	
Down - 90° - R750 - TW									
OULU 2	OUL-80112	288 LED	18 W	1926 lm	O	TW (2700K - 6500K)	DALI	3.3 kg	

Accessories

	 Recessing box A61051	 Continuous-coupler bracket A81781	 Wireless bluetooth converter A90291	 Xpress wireless switch A90591	 DALI Control System Control-DALI	 DMX Control System Control-DMX	 DMX/RDM Control System Control-DMX-RDM
OUL-80011		•	•	•	•		
OUL-80012		•	•	•	•		
OUL-80013		•		•	•		
OUL-80014		•				•	•
OUL-80021		•	•	•	•		
OUL-80022		•	•	•	•		
OUL-80023		•		•	•		
OUL-80024		•				•	•
OUL-80031		•	•	•	•		
OUL-80032		•	•	•	•		
OUL-80033		•		•	•		
OUL-80034		•				•	•
OUL-80101		•	•	•	•		
OUL-80102		•	•	•	•		
OUL-80103		•		•	•		
OUL-80104		•				•	•
OUL-80111		•	•	•	•		
OUL-80112		•	•	•	•		
OUL-80113		•		•	•		
OUL-80114		•				•	•
OUL-80121		•	•	•	•		
OUL-80122		•	•	•	•		
OUL-80123		•		•	•		
OUL-80124		•				•	•

We reserve the right to make technical and design changes.

01:24, 21-04-2024

<https://www.ligman.com/oulu-recessed-ceiling-luminaires-ou-re-c3/>

THAILAND

LIGMAN Lighting Co.,Ltd.
17/2 Moo 4, Monthong, Bang Nam Prioao,
24150 Chachoengsao - Thailand
info@ligman.com

OULU

OUL-80131	•	•	•	•		
OUL-80132	•	•	•	•		
OUL-80133	•		•	•		
OUL-80134	•				•	•
OUL-80201	•	•	•	•		
OUL-80202	•	•	•	•		
OUL-80203	•		•	•		
OUL-80204	•				•	•
OUL-80211	•	•	•	•		
OUL-80212	•	•	•	•		
OUL-80213	•		•	•		
OUL-80214	•				•	•
OUL-80221	•	•	•	•		
OUL-80222	•	•	•	•		
OUL-80223	•		•	•		
OUL-80224	•				•	•
OUL-80231	•	•	•	•		
OUL-80232	•	•	•	•		
OUL-80233	•		•	•		
OUL-80234	•				•	•
OUL-80241	•	•	•	•		
OUL-80242	•	•	•	•		
OUL-80243	•		•	•		
OUL-80244	•				•	•
OUL-80311	•	•	•	•		
OUL-80312	•	•	•	•		
OUL-80313	•		•	•		
OUL-80314	•				•	•
OUL-80321	•	•	•	•		
OUL-80322	•	•	•	•		
OUL-80323	•		•	•		
OUL-80324	•				•	•

We reserve the right to make technical and design changes.


01:24, 21-04-2024

<https://www.ligman.com/oulu-recessed-ceiling-luminaires-ou-re-c3/>


THAILAND

LIGMAN Lighting Co.,Ltd.
 17/2 Moo 4, Monthong, Bang Nam Prio, 24150 Chachoengsao - Thailand
info@ligman.com


OUL-80011, OUL-80012,
OUL-80013, OUL-80014




OUL-80021, OUL-80022,
OUL-80023, OUL-80024




OUL-80031, OUL-80032,
OUL-80033, OUL-80034

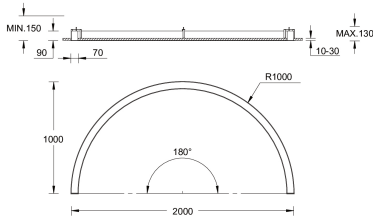


OUL-80101, OUL-80102,
OUL-80103, OUL-80104




OUL-80111, OUL-80112,
OUL-80113, OUL-80114




OUL-80121, OUL-80122,
OUL-80123, OUL-80124




OUL-80131, OUL-80132,
OUL-80133, OUL-80134




OUL-80201, OUL-80202,
OUL-80203, OUL-80204




OUL-80211, OUL-80212,
OUL-80213, OUL-80214




OUL-80221, OUL-80222,
OUL-80223, OUL-80224




OUL-80231, OUL-80232,
OUL-80233, OUL-80234




OUL-80241, OUL-80242,
OUL-80243, OUL-80244



OUL-80311, OUL-80312,
OUL-80313, OUL-80314

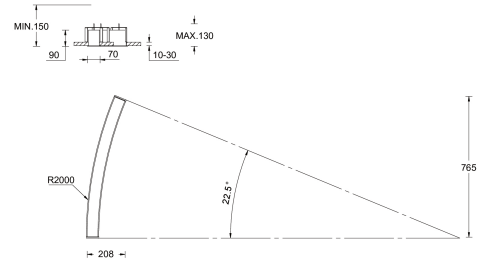

OUL-80321, OUL-80322,
OUL-80323, OUL-80324

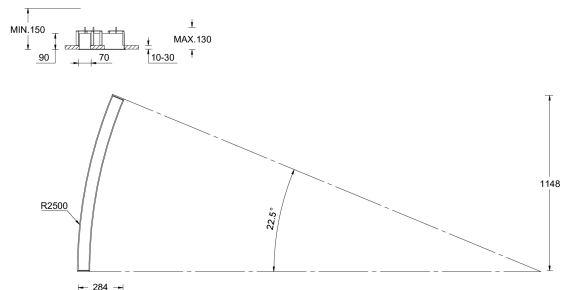

OULU

OULU
Surface ceiling luminaires

Unique family of curved extruded linear fixtures. Release your imagination, designing spaces with multiple curves in the OULU range.

<https://www.ligman.com/oulu-surface-ceiling-luminaires-ou-cei3/>



OULU
Pendant luminaires

Unique family of curved extruded linear fixtures. Release your imagination, designing spaces with multiple curves in the OULU range.

<https://www.ligman.com/oulu-pendant-luminaires-ou-pen3/>