


PITTSFIELD

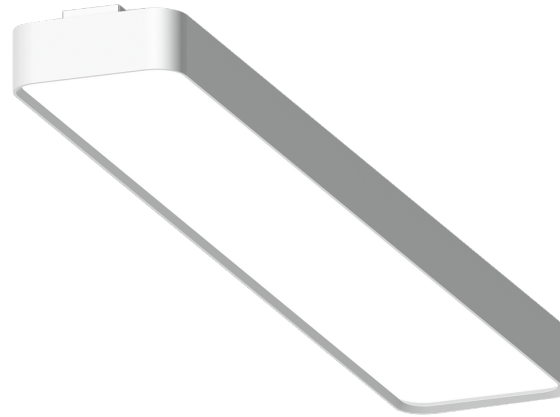

Linear suspended, recessed and surface ambient lighting. Expansive and elegant portfolio of rectilinear workplace lighting fixtures.

microPrim™

Luminaire Structure

- Extruded aluminium bended profile with powder coating
- Passive thermal management
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)


- PMMA diffuser with Opal (UGR <19) and micro prismatic (UGR <13) options for better glare control
- Integral control gear
- Remote driver is included if dimming options require
- Stainless steel, adjustable, suspension (1.5 m) complete with electrical wires in white for mounting

- Down light distribution only
- Wireless control available through Bluetooth connection
- Emergency module (1 or 3 hours) is available upon request with 3 options (BASIC, SELF-TEST, PRO-DALI)

Feature

LED	Tunable	RGBW
Cut-off	1-10V DIMMING	DALI DIMMING
DMX	DMX RDM	NON DIMMABLE
EMERGENCY KIT		


Optic



Product colour



Special finishes upon request

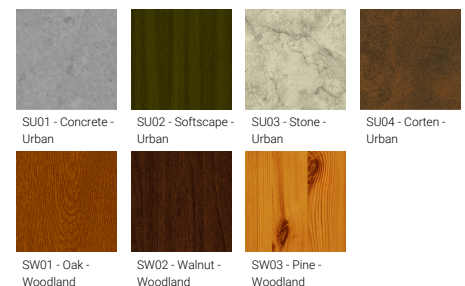

PITTSFIELD

Technical information

	Model number	Light source	Power	Lumen	Optic	CCT / CRI	Dimming type	Weight	
Down - 1060 mm									
PITTSFIELD 3	PIT-80211	432 LED	27 W	2915 - 3336 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	5.6 kg	
PITTSFIELD 3	PIT-80212	432 LED	38 W	4102 - 4671 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	5.6 kg	
Down - 1060 mm - RGBW									
PITTSFIELD 3	PIT-80214	1728 LED	54 W	1905 lm	O [Opal], P [Micro-prismatic]	RGBW40	Bluetooth	5.6 kg	
Down - 1060 mm - RGBW DMX									
PITTSFIELD 3	PIT-80215	1728 LED	54 W	1905 lm	O, P	RGBW40	DMX, DMX/RDM	5.6 kg	
Down - 1060 mm - Tunable White									
PITTSFIELD 3	PIT-80213	864 LED	43 W	5444 lm	O, P	TW (2700K - 6500K)	DALI	5.6 kg	
Down - 1390 mm									
PITTSFIELD 3	PIT-80221	576 LED	35 W	3605 - 4299 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	6.8 kg	
PITTSFIELD 3	PIT-80222	576 LED	49 W	5020 - 6044 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	6.8 kg	
Down - 1390 mm - RGBW									
PITTSFIELD 3	PIT-80224	2304 LED	72 W	2178 lm	O [Opal], P [Micro-prismatic]	RGBW40	Bluetooth	6.8 kg	
Down - 1390 mm - RGBW DMX									
PITTSFIELD 3	PIT-80225	2304 LED	72 W	2178 lm	O, P	RGBW40	DMX, DMX/RDM	6.8 kg	
Down - 1390 mm - Tunable White									
PITTSFIELD 3	PIT-80223	1152 LED	58 W	6222 lm	O, P	TW (2700K - 6500K)	DALI	6.8 kg	
Down - 720 mm									
PITTSFIELD 3	PIT-80201	288 LED	23 W	2366 - 2685 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	4.2 kg	
PITTSFIELD 3	PIT-80202	288 LED	32 W	3306 - 3771 lm	O [Opal], P [Micro-prismatic]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	4.2 kg	
Down - 720 mm - RGBW									
PITTSFIELD 3	PIT-80204	1152 LED	36 W	1360 lm	O [Opal], P [Micro-prismatic]	RGBW40	Bluetooth	4.2 kg	
Down - 720 mm - RGBW DMX									
PITTSFIELD 3	PIT-80205	1152 LED	36 W	1360 lm	O, P	RGBW40	DMX, DMX/RDM	4.2 kg	
Down - 720 mm - Tunable White									
PITTSFIELD 3	PIT-80203	576 LED	29 W	3889 lm	O, P	TW (2700K - 6500K)	DALI	4.2 kg	

We reserve the right to make technical and design changes.

07:13, 01-05-2026








<https://www.ligman.com/pittsfield-surface-ceiling-luminaires-pit-cei3/>








THAILAND
LIGMAN Lighting Co.,Ltd.
17/2 Moo 4, Monthong, Bang Nam Prio,
24150 Chachoengsao - Thailand
info@ligman.com






PITTSFIELD

Accessory

	 Wireless bluetooth converter A90291	 Xpress wireless switch A90591	 Decorative pattern - Type A for PITTSFIELD 720 mm A91921	 Decorative pattern - Type A for PITTSFIELD 1060 mm A92021	 Decorative pattern - Type A for PITTSFIELD 1390 mm A92121	 Decorative pattern - Type B for PITTSFIELD 720 mm A93321	 Decorative pattern - Type B for PITTSFIELD 1060 mm A93421
PIT-80201	•	•	•			•	
PIT-80202	•	•	•			•	
PIT-80203	•	•	•			•	
PIT-80204		•	•			•	
PIT-80205			•			•	
PIT-80211	•	•		•			•
PIT-80212	•	•		•			•
PIT-80213	•	•		•			•
PIT-80214		•	•			•	
PIT-80215			•			•	
PIT-80221	•	•			•		
PIT-80222	•	•			•		
PIT-80223	•	•			•		
PIT-80224		•	•			•	
PIT-80225			•			•	

	 Decorative pattern - Type B for PITTSFIELD 1390 mm A93521	 Decorative pattern - Type C for PITTSFIELD 720 mm A94721	 Decorative pattern - Type C for PITTSFIELD 1060 mm A94821	 Decorative pattern - Type C for PITTSFIELD 1390 mm A94921	 DALI Control System Control-DALI	 DMX Control System Control-DMX	 DMX/RDM Control System Control-DMX-RDM
PIT-80201		•			•		
PIT-80202		•			•		
PIT-80203		•			•		
PIT-80204		•			•		
PIT-80205		•				•	•
PIT-80211			•		•		
PIT-80212			•		•		
PIT-80213			•		•		
PIT-80214		•			•		
PIT-80215		•				•	•
PIT-80221	•			•	•		
PIT-80222	•			•	•		
PIT-80223	•			•	•		
PIT-80224		•			•		
PIT-80225		•				•	•

	 Emergency module - 250V - BASIC EM250V-BA	 Emergency module - 250V - PRO-DALI EM250V-DA	 Emergency module - 250V - SELF-TEST EM250V-ST
PIT-80201	•	•	•
PIT-80202	•	•	•
PIT-80203			
PIT-80204			
PIT-80205			
PIT-80211	•	•	•
PIT-80212	•	•	•

We reserve the right to make technical and design changes.

07:13, 01-05-2026

<https://www.ligman.com/pittsfield-surface-ceiling-luminaires-pit-cei3/>


THAILAND
LIGMAN Lighting Co.,Ltd.
17/2 Moo 4, Monthong, Bang Nam Prioa,
24150 Chachoengsao - Thailand
info@ligman.com




PITTSFIELD

PIT-80213			
PIT-80214			
PIT-80215			
PIT-80221	.	.	.
PIT-80222	.	.	.
PIT-80223			
PIT-80224			
PIT-80225			


PIT-80201, PIT-80202, PIT-80203,
PIT-80204, PIT-80205

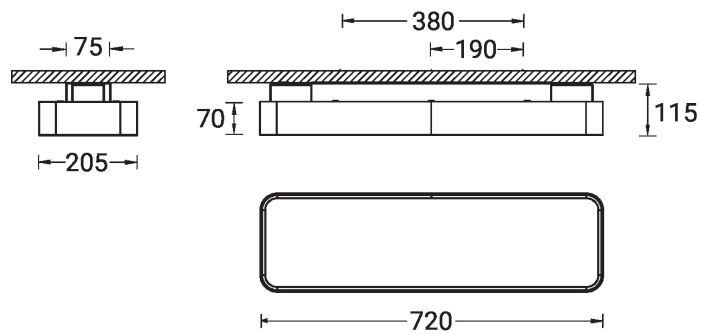


PIT-80211, PIT-80212, PIT-80213,
PIT-80214, PIT-80215

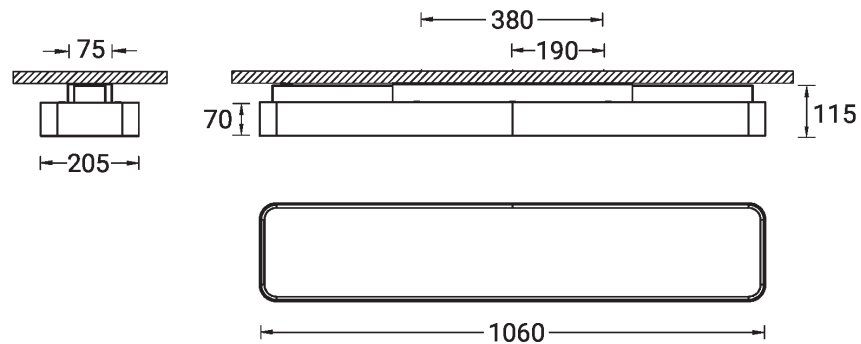

PIT-80221, PIT-80222, PIT-80223,
PIT-80224, PIT-80225

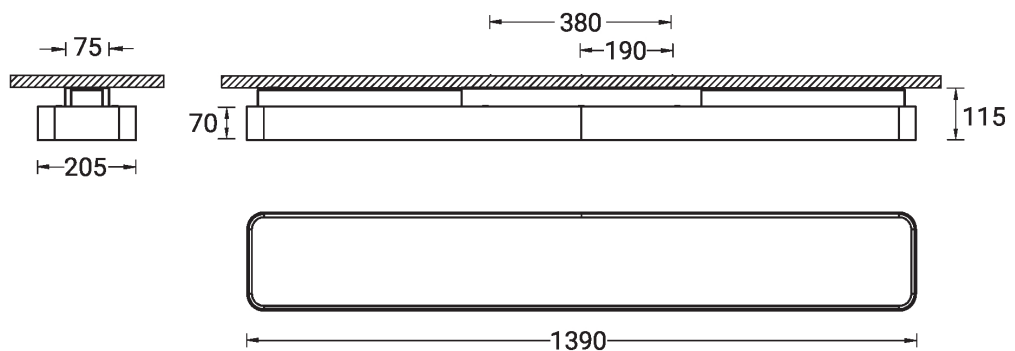

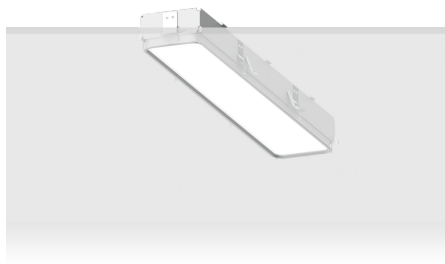PITTSFIELD

PITTSFIELD
Recessed ceiling luminaires

Linear suspended, recessed and surface ambient lighting. Expansive and elegant portfolio of rectilinear workplace lighting fixtures.

<https://www.ligman.com/pittsfield-recessed-ceiling-luminaires-pi-rec3/>



PITTSFIELD
Pendant luminaires

Linear suspended, recessed and surface ambient lighting. Expansive and elegant portfolio of rectilinear workplace lighting fixtures.

<https://www.ligman.com/pittsfield-pendant-luminaires-pi-pen3/>