

POWERMISSION



Column-mounted street lighting family.
Innovative, high-performance, sustainable,
flexible and future proof street lighting
range.




microVos



Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Thermal heat dissipation body
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Surge protection 10kV


Feature

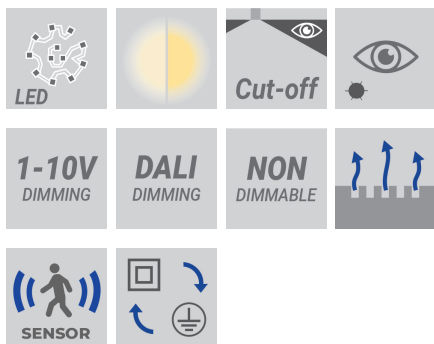


Optic



Product colour

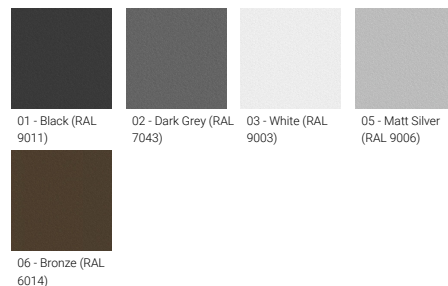

Special finishes upon request

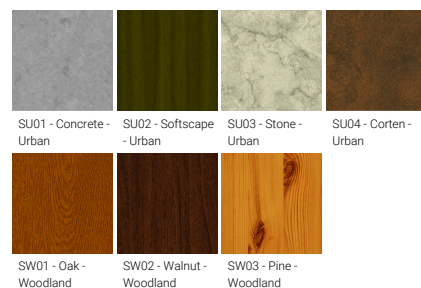

POWERMISSION

Technical information

	Model number	Light source	Power	Lumen	Optic	CCT / CRI	Dimming type	Weight	
POWERMISSION 2	P029-GP015	12 LED	13 W	1493 - 1670 lm	T2 [143°x56°], T3 [142°x70°], T4 [100°x76°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	4.7 kg	
POWERMISSION 2	P029-GP020	12 LED	19 W	2087 - 2338 lm	T2 [143°x56°], T3 [142°x70°], T4 [100°x76°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	4.7 kg	
POWERMISSION 2	P029-GP027	24 LED	26 W	3137 - 3512 lm	T2 [142°x53°], T3 [142°x70°], T4 [99°x79°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	4.8 kg	
POWERMISSION 2	P029-GP028	12 LED	28 W	2924 - 3284 lm	T2 [143°x56°], T3 [142°x70°], T4 [100°x76°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	4.7 kg	
POWERMISSION 2	P029-GP041	24 LED	37 W	4372 - 4845 lm	T2 [142°x53°], T3 [141°x69°], T4 [99°x79°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	4.8 kg	
POWERMISSION 2	P029-GP061	24 LED	53 W	5858 - 6503 lm	T2 [142°x53°], T3 [141°x69°], T4 [99°x79°]	3000K CRI80, 4000K CRI80	On/Off	4.8 kg	

Accessory

	Single arm mounting A90560	Single arm mounting A90676	Double arm mounting A90860	Double arm mounting A90876	DALI Control System Control-DALI
P029-GP015	•	•	•	•	•
P029-GP020	•	•	•	•	•
P029-GP027	•	•	•	•	•
P029-GP028	•	•	•	•	•
P029-GP041	•	•	•	•	•
P029-GP061	•	•	•	•	•

POWERMISSION

PO29-GP015, PO29-GP020, PO29-GP027
PO29-GP028, PO29-GP041, PO29-GP061

