

POWERSVISION



Modular area-lighting ceiling-recessed fixture family. Technical, powerful and flexible high-bay lighting delivery instruments designed and built to tackle all environments.




microVOS™
TECHNOLOGY


Luminaire Structure

- Extruded aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Thermal heat dissipation body
- Single cable entry, through wiring upon request
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Integral control gear


Feature

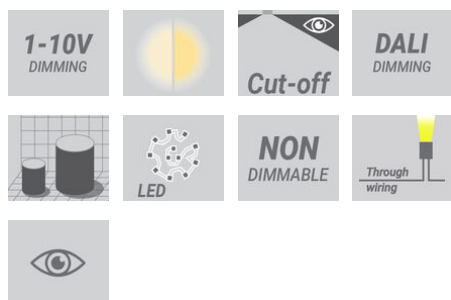


Optic

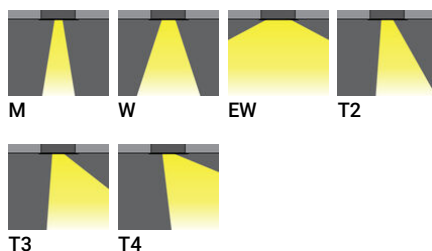

Product colour

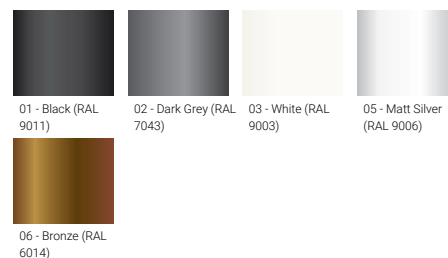

Special finishes upon request

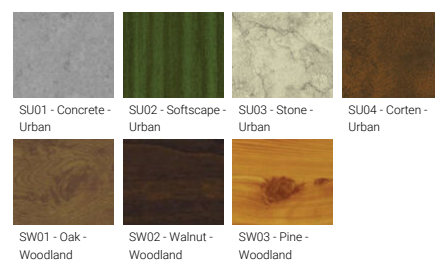

POWERSVISION

Technical information


	Model number	Light source	Power	Lumen	Optic	CCT / CRI	Dimming type	Weight	
POWERSVISION 5	PW59-GP028	24 LED	27 W	3052 - 3523 lm	M [27°, W [51°, EW [122°, T2 [141°x52°, T3 [141°x69°, T4 [99°x79°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	6.5 kg	
POWERSVISION 5	PW59-GP042	24 LED	38 W	4272 - 4941 lm	M [27°, W [51°, EW [122°, T2 [141°x52°, T3 [141°x69°, T4 [99°x79°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	6.5 kg	
POWERSVISION 5	PW59-GP056	24 LED	54 W	5781 - 6655 lm	M [27°, W [51°, EW [122°, T2 [141°x52°, T3 [141°x69°, T4 [99°x79°]	3000K CRI80, 4000K CRI80	On/Off, DALI	6.5 kg	
POWERSVISION 6	PW69-GP054	48 LED	52 W	6105 - 7046 lm	M [27°, W [51°, EW [122°, T2 [141°x52°, T3 [141°x69°, T4 [99°x79°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	11.0 kg	
POWERSVISION 6	PW69-GP080	48 LED	75 W	8543 - 9882 lm	M [27°, W [51°, EW [122°, T2 [141°x52°, T3 [141°x69°, T4 [99°x79°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	11.0 kg	
POWERSVISION 6	PW69-GP108	48 LED	106 W	11561 - 13310 lm	M [27°, W [51°, EW [122°, T2 [141°x52°, T3 [141°x69°, T4 [99°x79°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	11.0 kg	

Accessories


	 DALI Control System Control-DALI
PW59-GP028	•
PW59-GP042	•
PW59-GP056	•
PW69-GP054	•
PW69-GP080	•
PW69-GP108	•

POWERSVISION


PW59-GP028
PW59-GP042
PW59-GP056

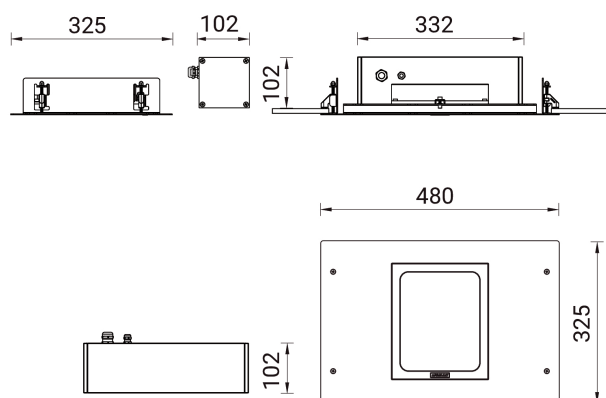

PW69-GP054
PW69-GP080
PW69-GP108

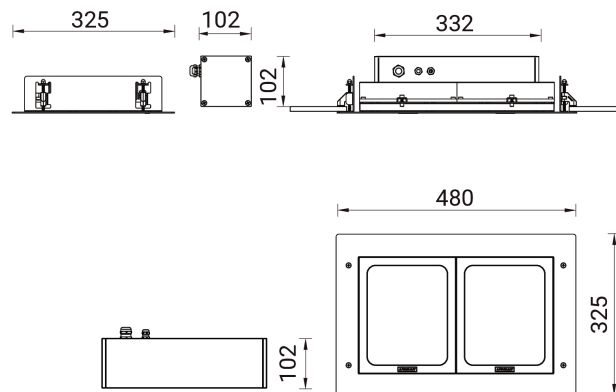

POWERSVISION

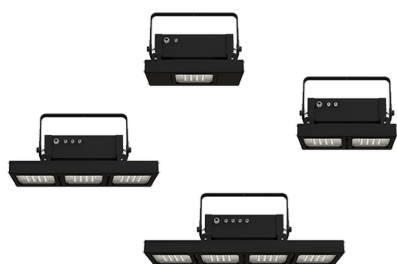

POWERSVISION

Surface mounted high bay luminaires

Modular area-lighting ceiling-surface fixture family. Technical, powerful and flexible high-bay lighting delivery instruments designed and built to tackle all environments.

<https://www.ligman.com/powersvision-surface-mounted-high-bay-luminaires-pow-hl3/>



POWERSVISION

Service station lighting

Modular under-canopy recessed service station range. Powerful, efficient and sustainable solutions for petrol station environments.

<https://www.ligman.com/powersvision-service-station-lighting-po-ss3/>