



# ROCKY



Single directional downlight, part of the Modular range. Modular: flexibility in a host of technical configurations.




## Luminaire Structure

- Die-cast aluminium housing with powder coating


- Die-cast aluminium heat sink with excellent thermal management  
 - Propriety lens design for high LOR  
 - Adjustable: Tilt 30°

- Remote driver is included

## Feature

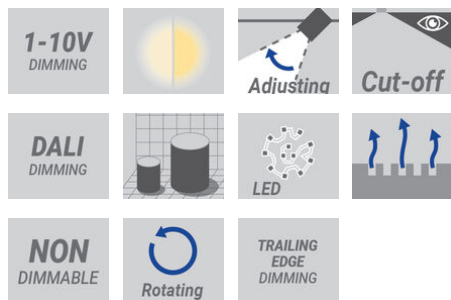

## Optic



## Product colour



## ROCKY

## Technical information

	Model number	Light source	Power	Lumen	Optic	CCT / CRI	Dimming type	Weight
<b>118x118 mm</b>								
ROCKY 1	<b>RC-80001</b>	5 LED	9 W	612 - 750 lm	N [19°], M [31°], W [48°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI, Trailing edge	0.49 kg.
ROCKY 1	<b>RC-80011</b>	7 LED	12 W	883 - 1040 lm	N [15°], M [26°], W [35°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI, Trailing edge	0.57 kg.
<b>147x147 mm</b>								
ROCKY 2	<b>RC-80021</b>	9 LED	15 W	1095 - 1283 lm	N [15°], M [26°], W [39°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI, Trailing edge	0.92 kg.
ROCKY 2	<b>RC-80031</b>	12 LED	20 W	1512 - 1720 lm	N [15°], M [26°], W [39°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI, Trailing edge	1.00 kg.
ROCKY 3	<b>RC-80041</b>	18 LED	29 W	2484 - 2837 lm	N [15°], M [27°], W [42°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	1.28 kg.

## Accessories




DALI Control System  
**Control-DALI**


RC-80001	•
RC-80011	•
RC-80021	•
RC-80031	•
RC-80041	•

**ROCKY**


RC-80001




RC-80011



RC-80021



RC-80031



RC-80041

