

# SANTANDER




Modern and clean urban post top. Its delicate open-head design hiding technically precise asymmetric and symmetric street optics.



## Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency PMMA lens
- Integral control gear


## Feature

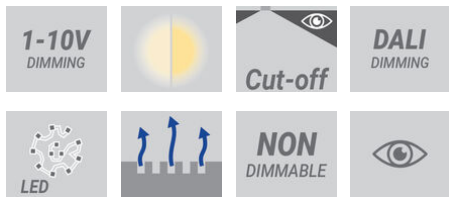


## Optic



## Product colour

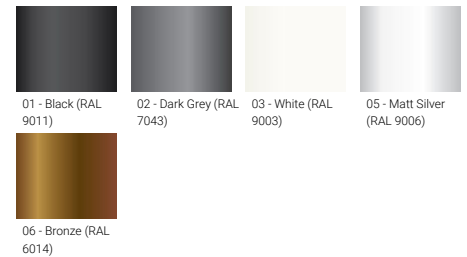



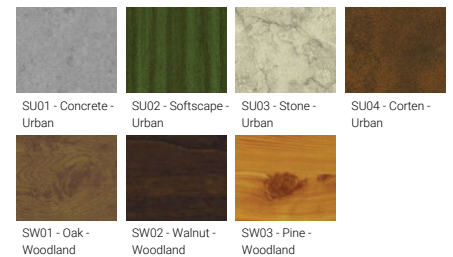






## Special finishes upon request




# SANTANDER

## Technical information

	Model number	Light source	Power	Lumen	Optic	CCT / CRI	Dimming type	Weight	
SANTANDER 1	<b>SAT-90001</b>	4 x 12 LED	126 W	9616 - 13665 lm	W [108°], VW [120°], T2 [136°x22°], T3 [140°x44°], T4 [148°x78°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	13 kg	  
SANTANDER 2	<b>SAT-90011</b>	4 x 6 LED	28 W	2103 - 2989 lm	W [108°], VW [120°], T2 [136°x22°], T3 [140°x44°], T4 [148°x78°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	13 kg	  
SANTANDER 2	<b>SAT-90012</b>	4 x 6 LED	56 W	4207 - 5978 lm	W [108°], VW [120°], T2 [136°x22°], T3 [140°x44°], T4 [148°x78°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	13 kg	  

## Accessories

 DALI Control System <b>Control-DALI</b>	
SAT-90001	•
SAT-90011	•
SAT-90012	•

**SANTANDER**

SAT-90001, SAT-90011,  
SAT-90012

