


# SIDNEY



Discrete, minimal-footprint regressed downlights. Perfect for providing precise task lighting from the most compact of packages.




## Luminaire Structure

- Die-cast aluminium housing with powder coating


- Die-cast aluminium heat sink with excellent thermal management  
 - Aluminium reflector with white powder coating

- Remote driver is included

## Feature

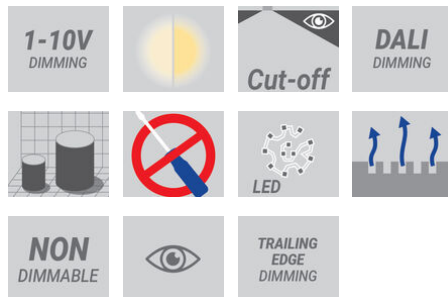

## Optic



## Product colour



## SIDNEY

## Technical information

	Model number	Light source	Power	Lumen	Optic	CCT / CRI	Dimming type	Weight
<b>Ø107 mm</b>								
SIDNEY 2	<b>SI-80011</b>	5 LED	9 W	468 - 605 lm	N [26°], M [34°], W [48°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI, Trailing edge	0.57 kg.
SIDNEY 2	<b>SI-80021</b>	7 LED	12 W	697 - 830 lm	N [25°], M [33°], W [39°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI, Trailing edge	0.57 kg.
<b>Ø87 mm</b>								
SIDNEY 1	<b>SI-80001</b>	3 LED	6 W	247 - 346 lm	N [28°], M [35°], W [46°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	0.30 kg.

## Accessories




DALI Control System  
**Control-DALI**


SI-80001	•
SI-80011	•
SI-80021	•

**SIDNEY**

SI-80001

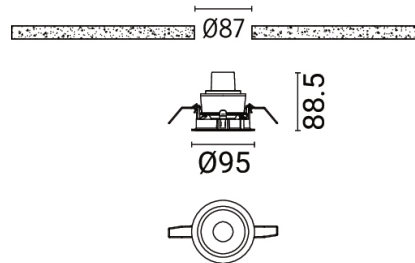

SI-80011

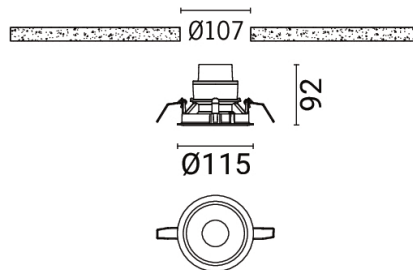

SI-80021

