


SLIMSOFT




A sleek, efficient diffused bollard range. Providing comfortable light distribution with minimal glare, it enhances outdoor environments by creating visually pleasing and safe pathways, landscapes, and architectural spaces.

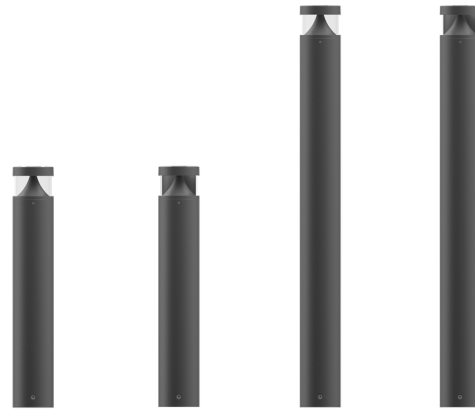


Luminaire Structure

- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear acrylic PMMA diffuser
- High-efficiency PMMA lens
- Integral control gear


Feature

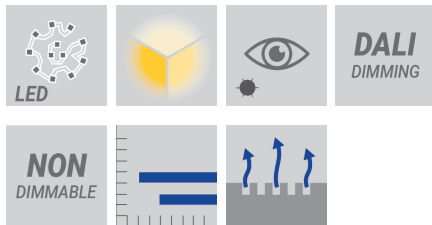


Optic



Product colour

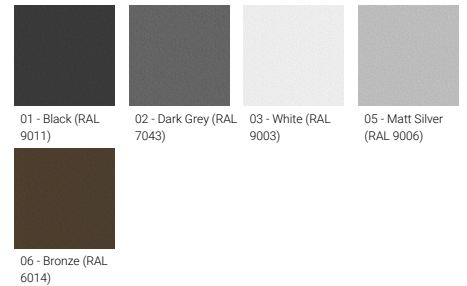



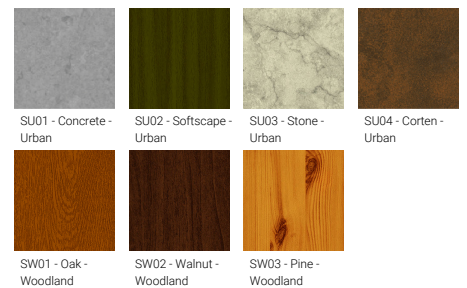

Special finishes upon request






SLIMSOFT


Technical information

	Model number	Light source	Power	Lumen	Optic	CCT / CRI	Dimming type	Weight	
Ø102 - 1000 mm - With 180° light distribution									
SLIMSOFT 1	SLI-10013	5 LED	7 W	165 - 180 lm	G [180°]	2700K CRI80, 3000K CRI80, 4000K CRI80	On/Off, DALI	4.0 kg	
Ø102 - 1000 mm - With 360° light distribution									
SLIMSOFT 1	SLI-10011	8 LED	9 W	370 - 406 lm	G [360°]	2700K CRI80, 3000K CRI80, 4000K CRI80	On/Off, DALI	4.0 kg	
Ø102 - 600 mm - With 180° light distribution									
SLIMSOFT 1	SLI-10003	5 LED	7 W	165 - 180 lm	G [180°]	2700K CRI80, 3000K CRI80, 4000K CRI80	On/Off, DALI	2.9 kg	
Ø102 - 600 mm - With 360° light distribution									
SLIMSOFT 1	SLI-10001	8 LED	9 W	370 - 406 lm	G [360°]	2700K CRI80, 3000K CRI80, 4000K CRI80	On/Off, DALI	2.9 kg	


Accessory

	 Anchor bolt A10791	 Root mount kit A15091	 DALI Control System Control-DALI
SLI-10001	•	•	•
SLI-10003	•	•	•
SLI-10011	•	•	•
SLI-10013	•	•	•


SLI-10001

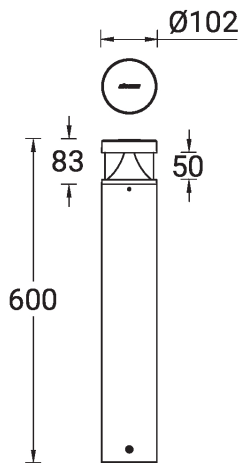

SLI-10003

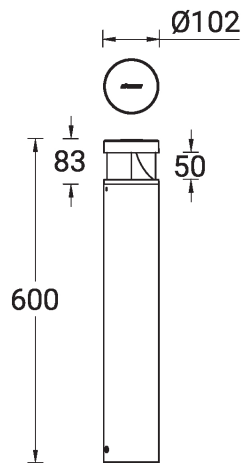

SLI-10011

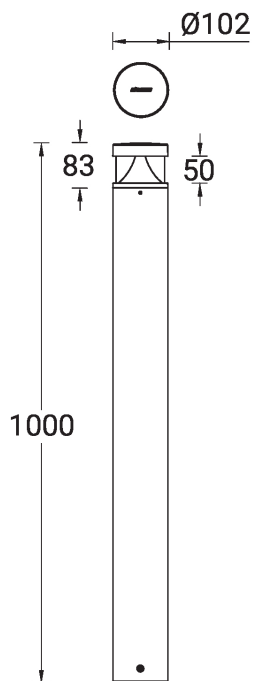

SLI-10013

