

SMITH



Straight clean round and square shape column. Smooth lines complimented with a smooth lighting effect from the opal vertical diffuser.




microPrim™


Luminaire Structure

- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Opal UV-stabilised polycarbonate diffuser
- Maximum wind load resistance is 160 km/h
- Surge protection 10kV


Feature

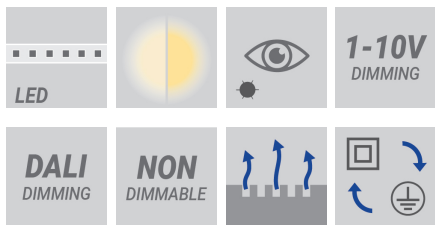


Optic



Product colour

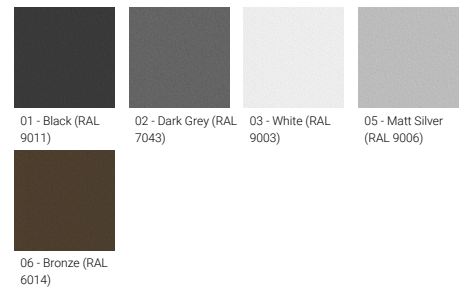

Special finishes upon request

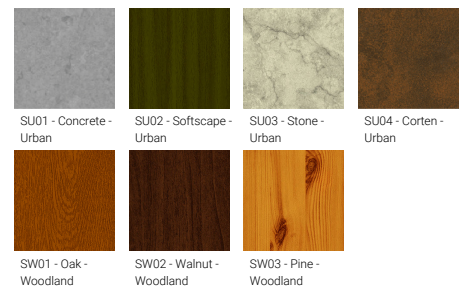


SMITH


Technical information

	Model number	Light source	Power	Lumen	Optic	CCT / CRI	Dimming type	Weight
Round - Ø160 mm - Supplied with specific 2.5 m cylindrical, straight aluminium pole: APD125160-SM-21121								
SMITH 2	SM-21121	192 LED	54 W	7244 - 7626 lm	G [360°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	20.5 kg
Round - Ø225 mm - Supplied with specific 3 m cylindrical, straight aluminium pole: APD130225-SM-211031								
SMITH 3	SM-21031	192 LED	58 W	5172 - 5444 lm	G [360°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	34.0 kg
Square - 186x186 mm - Supplied with specific 2.5 m square, straight aluminium pole: APC125186-SM-21141								
SMITH 5	SM-21141	8 x 32 LED	76 W	7876 - 8468 lm	G [360°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	27.6 kg


Accessory

	Perforated shield A20131	Root mount kit A20691	Root mount kit A20791	Circuit breaker box IP44 A21291	 DALI Control System Control-DALI
SM-21031			•	•	•
SM-21121	•	•		•	•
SM-21141		•		•	•


SM-21121

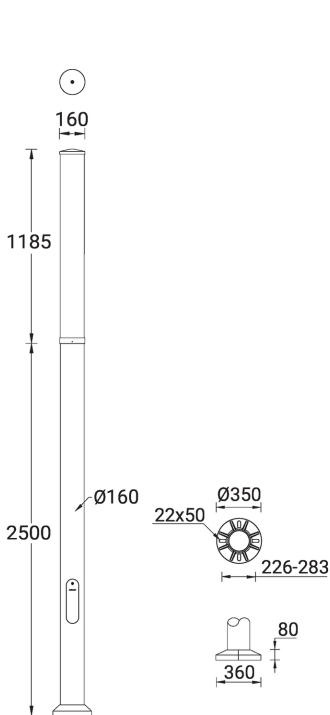

SM-21031

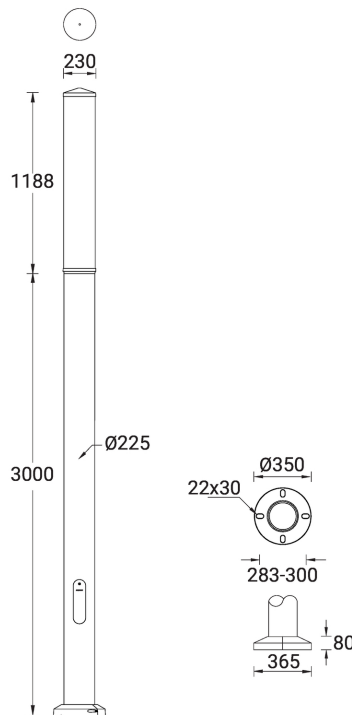

SM-21141

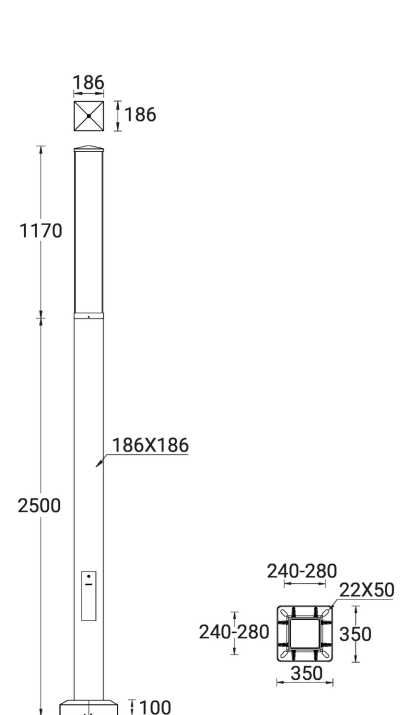

SMITH

SMITH
Bollards

Straight clean round and square shape bollard.
Smooth lines complimented with a smooth
lighting effect from the opal vertical diffuser.

<https://www.ligman.com/smith-bollards-sm-bo3/>