

# TANGO



Square or circular form technical post top range. Flexible post top lighting solutions for perfect symmetrical or asymmetrical task lighting.




## Luminaire Structure

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance


- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency PMMA lens
- Clear toughened glass

- Maximum wind load resistance is 140 km/h


## Feature

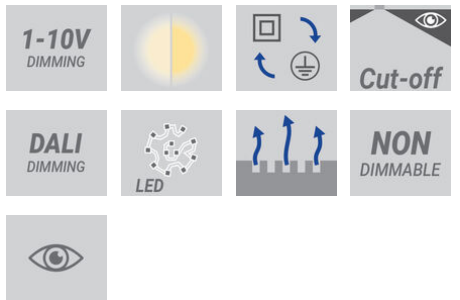


## Optic

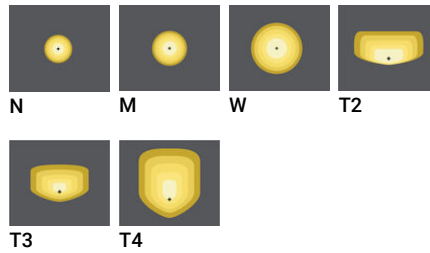

## Product colour

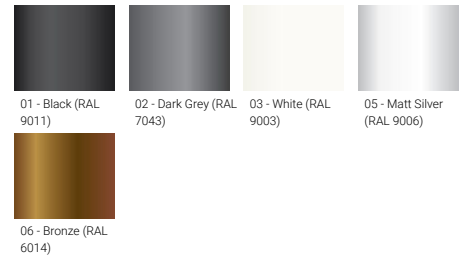



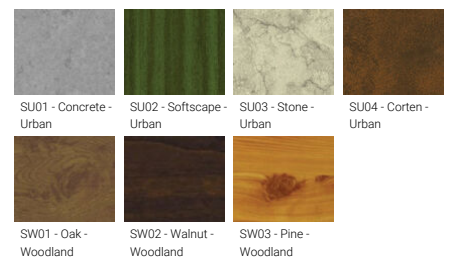



## Special finishes upon request














# TANGO

## Technical information

	Model number	Light source	Power	Lumen	Optic	CCT / CRI	Dimming type	Weight	
<b>1 side - Round</b>									
TANGO 36	TA-20001	24 LED	38 W	3634 - 4265 lm	N [12°], M [26°], W [40°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	5.3 kg	
TANGO 36	TA-20011	16 LED	35 W	3476 - 3910 lm	T2 [134°x50°], T3 [125°x64°], T4 [98°x72°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	5.3 kg	
<b>1 side - Square - Supplied with a square, straight aluminium pole - Height options: 3 - 6 m</b>									
TANGO 35	TA-20731	16 LED	35 W	3476 - 3910 lm	T2 [140°x46°], T3 [140°x68°], T4 [91°x76°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	20.4 kg	
<b>2 sides - Round</b>									
TANGO 37	TA-20021	2 x 24 LED	76 W	7268 - 8530 lm	N [12°], M [26°], W [40°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	9.8 kg	
TANGO 37	TA-20031	2 x 16 LED	70 W	6952 - 7820 lm	T2 [140°x46°], T3 [140°x68°], T4 [91°x76°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	9.8 kg	
<b>2 sides - Square - Supplied with a square, straight aluminium pole - Height options: 3 - 6 m</b>									
TANGO 35	TA-20732	16 & 16 LED	70 W	6952 - 7820 lm	T2 [140°x46°], T3 [140°x68°], T4 [91°x76°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	26.7 kg	


## Accessories

	 Root mount kit <b>A20491</b>	 Circuit breaker box IP44 <b>A21291</b>	 3 m - Square, straight aluminium pole for TANGO - 1 side <b>APC130102-TANGO</b>	 4 m - Square, straight aluminium pole for TANGO - 1 side <b>APC140102-TANGO</b>	 5 m - Square, straight aluminium pole for TANGO - 1 side <b>APC150102-TANGO</b>	 6 m - Square, straight aluminium pole for TANGO - 1 side <b>APC160102-TANGO</b>	 3 m - Square, straight aluminium pole for TANGO - 2 sides <b>APC230102-TANGO</b>
TA-20001							
TA-20011							
TA-20021							
TA-20031							
TA-20731	.	.	.	.	.	.	.
TA-20732	.	.	.	.	.	.	.


	 4 m - Square, straight aluminium pole for TANGO - 2 sides <b>APC240102-TANGO</b>	 5 m - Square, straight aluminium pole for TANGO - 2 sides <b>APC250102-TANGO</b>	 6 m - Square, straight aluminium pole for TANGO - 2 sides <b>APC260102-TANGO</b>	 <b>DALI CONTROL</b> DALI Control System <b>Control-DALI</b>
TA-20001				.
TA-20011				.
TA-20021				.
TA-20031				.
TA-20731				.
TA-20732	.	.	.	.

**TANGO**


TA-20001, TA-20011





TA-20021, TA-20031



TA-20731

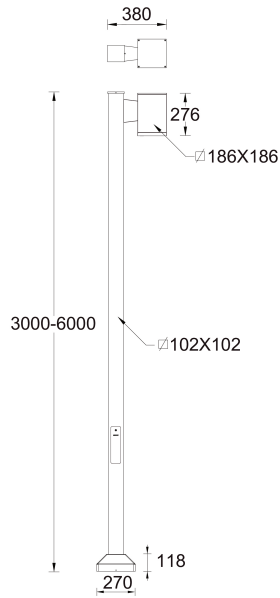

TA-20732

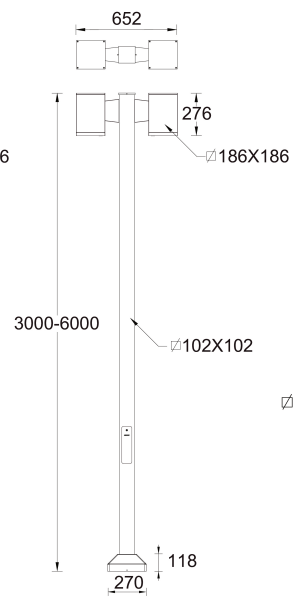

**TANGO**

---

TANGO  
**Surface exterior downlights**

---

Circular or square form technical surface-ceiling downlight range. Completely tailorable ceiling-mounted optical lighting solutions for perfect task or architectural lighting.

<https://www.ligman.com/tango-surface-exterior-downlights-ta-ce3/>



---

TANGO  
**Surface facade luminaires**

---

Circular or square form technical up & downlight wall range. Completely tailorable wall-mounted direct/indirect optical lighting solutions for perfect task or architectural lighting.

<https://www.ligman.com/tango-surface-facade-luminaires-ta-su3/>