

TRIANGLE




Triangular surface wall-mounted family.
High-protection, stealth-like and angular range aesthetic, encasing a wide variety of technical optic options.




Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry, through wiring upon request
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Integral control gear


Feature

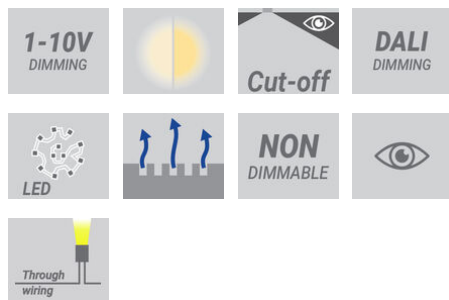


Optic

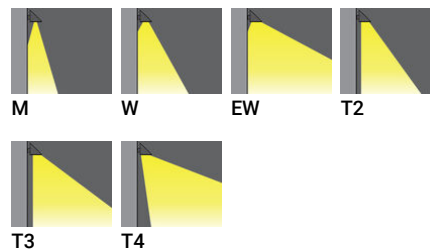

Product colour

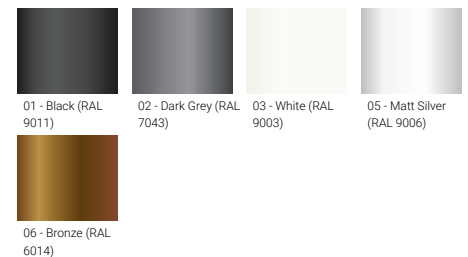

Special finishes upon request

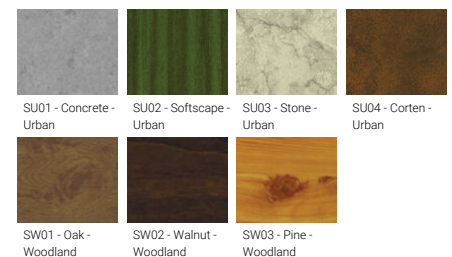

TRIANGLE




Technical information

	Model number	Light source	Power	Lumen	Optic	CCT / CRI	Dimming type	Weight	
TRIANGLE 9	TR-31711	24 LED	38 W	4260 - 4917 lm	M [30°], W [52°], EW [108°], T2 [135°x47°], T3 [140°x71°], T4 [100°x81°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	20.1 kg	
TRIANGLE 9	TR-31712	24 LED	54 W	5777 - 6666 lm	M [30°], W [52°], EW [108°], T2 [135°x47°], T3 [140°x71°], T4 [100°x81°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	20.1 kg	

Accessories

	
DALI Control System	
Control-DALI	
TR-31711	•
TR-31712	•

TR-31711, TR-31712

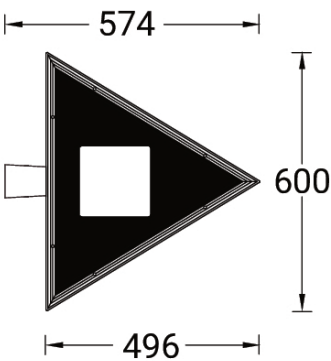

TRIANGLE



TRIANGLE

Street & area lighting luminaires

Triangular column-mounted family. High-protection, stealth-like and angular range aesthetic, encasing a wide variety of technical optic options.

<https://www.ligman.com/triangle-street-area-lighting-luminaires-tr-st3/>