VANCOUVER

IP65 IK08 IP66

DARKSKY APPROVED
Reduces light pollution
Certified by DarkSky.org

LIGHT CONNECT™

Total urban realm lighting solution. Optional heights, accent projectors, accessories and decorative lattice panels.

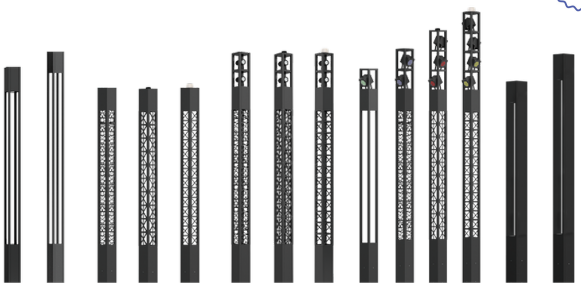

Luminaire Structure

- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency optical reflector or high-efficiency polycarbonate lens
- Maximum wind load resistance is 160 km/h
- Surge protection 10kV
- VANCOUVER luminaires with projectors on top and colder than 3000K CCT do not meet the IDA certification requirements

Feature

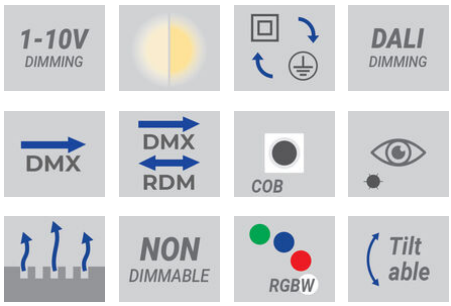

Optic

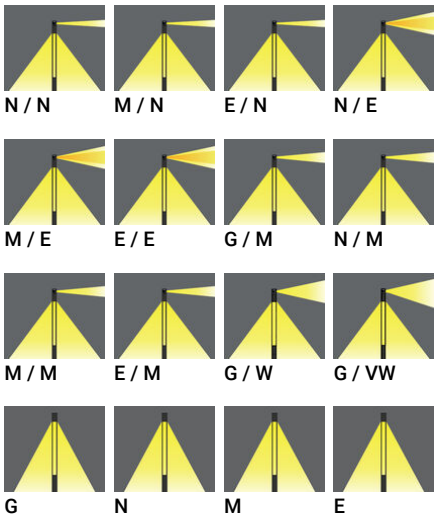

Product colour

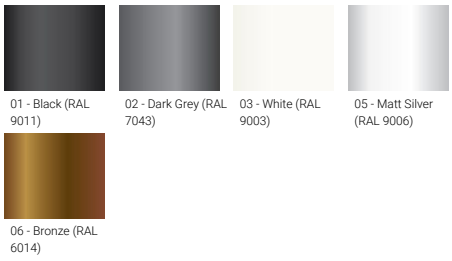

01 - Black (RAL 9011)
02 - Dark Grey (RAL 7043)
03 - White (RAL 9003)
05 - Matt Silver (RAL 9006)
06 - Bronze (RAL 6014)

Special finishes upon request

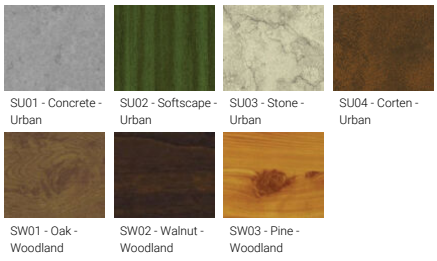

SU01 - Concrete - Urban
SU02 - Softscape - Urban
SU03 - Stone - Urban
SU04 - Corten - Urban
SW01 - Oak - Woodland
SW02 - Walnut - Woodland
SW03 - Pine - Woodland

THAILAND
LIGMAN Lighting Co.,Ltd.
17/2 Moo 4, Monthong, Bang Nam Priao,
24150 Chachoengsao - Thailand
info@ligman.com

Technical information

	Model number	Light source	Power	Lumen	Optic	CCT / CRI	Dimming type	Weight	
160x160 mm - 3000 mm - No decorative pattern - IP65									
VANCOUVER 55	**VA-20251**	1 COB	21 W	675 - 710 lm	G [65°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	30 kg	
160x160 mm - 3000 mm - No decorative pattern - IP65									
VANCOUVER 2	**VA-20011**	1 COB	20 W	1397 - 1414 lm	G [65°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	25.0 kg	
VANCOUVER 41	**VA-20191**	1 COB	20 W	1233 - 1326 lm	G [143°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	25 kg	
240x240 mm - 3700 mm - Decorative pattern type 3 - IP65 - With opal lens									
VANCOUVER 62	**VA-20283**	12 x 32 LED	94 W	4864 - 5120 lm	G [360°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	59.8 kg	
240x240 mm - 3700 mm - Decorative pattern type 1 - IP65									
VANCOUVER 8	**VA-20051**	1 COB	40 W	1248 - 1336 lm	G [64°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	55.0 kg	
VANCOUVER 52	**VA-20241**	1 COB	40 W	2586 - 2781 lm	G [134°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	55 kg	
240x240 mm - 3700 mm - Decorative pattern type 1 - IP65 - With opal lens									
VANCOUVER 60	**VA-20281**	12 x 32 LED	94 W	4864 - 5120 lm	G [360°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	60.1 kg	
240x240 mm - 3700 mm - Decorative pattern type 1 - IP66 - RGBW									
VANCOUVER 21	**VA-20161**	7 LED	33 W	1119 - 1429 lm	N [21°], M [35°], E [48x26°]	RGBW30, RGBW40	DMX, DMX/RDM	55 kg	
240x240 mm - 3700 mm - Decorative pattern type 1 - LIGHTCONNECT™									
VANCOUVER 8	**VA-20051-LC**	1 COB	40 W	1248 - 1336 lm	G [64°]	3000K CRI80, 4000K CRI80	DALI	55.0 kg	
VANCOUVER 52	**VA-20241-LC**	1 COB	40 W	2586 - 2781 lm	G [134°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	55 kg	
240x240 mm - 3700 mm - Decorative pattern type 2 - IP65									
VANCOUVER 9	**VA-20061**	1 COB	40 W	1091 - 1167 lm	G [58°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	55.8 kg	
VANCOUVER 53	**VA-20242**	1 COB	40 W	2586 - 2781 lm	G [134°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	55.8 kg	
240x240 mm - 3700 mm - Decorative pattern type 2 - IP65 - With opal lens									
VANCOUVER 61	**VA-20282**	12 x 32 LED	94 W	4864 - 5120 lm	G [360°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	60.5 kg	
240x240 mm - 3700 mm - Decorative pattern type 2 - IP66 -RGBW									
VANCOUVER 22	**VA-20171**	7 LED	33 W	1119 - 1429 lm	N [21°], M [35°], E [48x26°]	RGBW30, RGBW40	DMX, DMX/RDM	55.8 kg	
240x240 mm - 3700 mm - Decorative pattern type 2 - LIGHTCONNECT™									
VANCOUVER 9	**VA-20061-LC**	1 COB	40 W	1091 - 1167 lm	G [58°]	3000K CRI80, 4000K CRI80	DALI	55.8 kg	
VANCOUVER 53	**VA-20242-LC**	1 COB	40 W	2586 - 2781 lm	G [134°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	55.8 kg	

We reserve the right to make technical and design changes.

THAILAND
LIGMAN Lighting Co.,Ltd.
17/2 Moo 4, Monthong, Bang Nam Priao,
24150 Chachoengsao - Thailand
info@ligman.com

240x240 mm - 3700 mm - Decorative pattern type 3 - IP65								
VANCOUVER 10	**VA-20071**	1 COB	40 W	1560 - 1670 lm	G [56°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	54.3 kg
VANCOUVER 54	**VA-20243**	1 COB	40 W	2586 - 2781 lm	G [134°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	54.3 kg
240x240 mm - 3700 mm - Decorative pattern type 3 - IP66 - RGBW								
VANCOUVER 23	**VA-20181**	7 LED	33 W	1119 - 1429 lm	N [21°], M [35°], E [48x26°]	RGBW30, RGBW40	DMX, DMX/RDM	54.3 kg
240x240 mm - 3700 mm - No decorative pattern - IP66 - RGBW								
VANCOUVER 20	**VA-20151**	7 LED	33 W	1119 - 1429 lm	N [21°], M [35°], E [48x26°]	RGBW30, RGBW40	DMX, DMX/RDM	52 kg
240x240 mm - 4070 mm - Decorative pattern type 1 (Optic) - 1 projector (Optic 2nd) - LIGHTCONNECT™								
VANCOUVER 5	**VA-20021-LC**	1 COB & 1 COB (Projector)	61 W	2901 - 3024 lm	G [64°]	3000K CRI80, 4000K CRI80	DALI	52.4 kg
VANCOUVER 43	**VA-20211-LC**	1 COB & 1 COB (Projector)	61 W	4239 - 4469 lm	G [134°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	52.4 kg
240x240 mm - 4070 mm - Decorative pattern type 1 (Optic) - 1 projector (Optic 2nd) IP65								
VANCOUVER 5	**VA-20021**	1 COB & 1 COB (Projector)	61 W	2901 - 3024 lm	G [64°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	52.4 kg
VANCOUVER 43	**VA-20211**	1 COB & 1 COB (Projector)	61 W	4239 - 4469 lm	G [134°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	52.4 kg
240x240 mm - 4070 mm - Decorative pattern type 1 (Optic) - 1 projector (Optic 2nd) IP66 - RGBW								
VANCOUVER 17	**VA-20121**	7 LED & 7 LED (Projector)	66 W	1642 - 2367 lm	N [21°], M [35°], E [48°x26°]	RGBW30, RGBW40	DMX, DMX/RDM	59.2kg
240x240 mm - 4070 mm - Decorative pattern type 2 (Optic) - 1 projector (Optic 2nd) - LIGHTCONNECT™								
VANCOUVER 6	**VA-20031-LC**	1 COB & 1 COB (Projector)	61 W	2744 - 2855 lm	G [58°]	3000K CRI80, 4000K CRI80	DALI	52.4 kg
VANCOUVER 46	**VA-20221-LC**	1 COB & 1 COB (Projector)	61 W	4188 - 5892 lm	G [134°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	52.4 kg
240x240 mm - 4070 mm - Decorative pattern type 2 (Optic) - 1 projector (Optic 2nd) IP65								
VANCOUVER 6	**VA-20031**	1 COB & 1 COB (Projector)	61 W	2744 - 2855 lm	G [58°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	52.4 kg
VANCOUVER 46	**VA-20221**	1 COB & 1 COB (Projector)	61 W	4188 - 4484 lm	G [134°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	52.4 kg
240x240 mm - 4070 mm - Decorative pattern type 2 (Optic) - 1 projector (Optic 2nd) IP66 - RGBW								
VANCOUVER 18	**VA-20131**	7 LED & 7 LED (Projector)	66 W	1615 - 2271 lm	N [21°], M [35°], E [48°x26°]	RGBW30, RGBW40	DMX, DMX/RDM	60 kg
240x240 mm - 4070 mm - Decorative pattern type 3 (Optic) - 1 projector (Optic 2nd) - LIGHTCONNECT™								
VANCOUVER 7	**VA-20041-LC**	1 COB & 1 COB (Projector)	61 W	3213 - 3358 lm	G [56°]	3000K CRI80, 4000K CRI80	DALI	52.4 kg
VANCOUVER 49	**VA-20231-LC**	1 COB & 1 COB (Projector)	61 W	4239 - 4469 lm	G [134°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	52.4 kg
240x240 mm - 4070 mm - Decorative pattern type 3 (Optic) - 1 projector (Optic 2nd) IP65								
VANCOUVER 7	**VA-20041**	1 COB & 1 COB (Projector)	61 W	3213 - 3358 lm	G [56°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	52.4 kg
VANCOUVER 49	**VA-20231**	1 COB & 1 COB (Projector)	61 W	4239 - 4469 lm	G [134°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	52.4 kg

We reserve the right to make technical and design changes.

THAILAND
LIGMAN Lighting Co.,Ltd.
17/2 Moo 4, Monthong, Bang Nam Priao,
24150 Chachoengsao - Thailand
info@ligman.com

240x240 mm - 4070 mm - Decorative pattern type 3 (Optic) - 1 projector (Optic 2nd) IP66 - RGBW									
VANCOUVER 19	**VA-20141**	7 LED & 7 LED (Projector)	66 W	1738 - 2392 lm	N [18°], M [30°], E [34°x21°]	RGBW30, RGBW40	DMX, DMX/RDM	58.5 kg	
240x240 mm - 4070 mm - No decorative pattern (Optic) - 1 projector (Optic 2nd) IP66 - RGBW									
VANCOUVER 16	**VA-20111**	7 LED & 7 LED (Projector)	66 W	1968 - 2624 lm	N [21°], M [35°], E [48°x26°]	RGBW30, RGBW40	DMX, DMX/RDM	56.2 kg	
240x240 mm - 4400 mm - Decorative pattern type 1 (Optic) - 2 projectors (Optic 2nd) IP66 - RGBW									
VANCOUVER 17	**VA-20122**	7 LED & 2 x 7 LED (Projectors)	99 W	2716 - 3796 lm	N [21°], M [35°], E [48°x26°]	RGBW30, RGBW40	DMX, DMX/RDM	63.4 kg	
240x240 mm - 4400 mm - Decorative pattern type 2 (Optic) - 2 projectors (Optic 2nd) IP66 - RGBW									
VANCOUVER 18	**VA-20132**	7 LED & 2 x7 LED (Projectors)	99 W	2689 - 3700 lm	N [21°], M [35°], E [48°x26°]	RGBW30, RGBW40	DMX, DMX/RDM	64.2 kg	
240x240 mm - 4400 mm - Decorative pattern type 3 (Optic) - 2 projectors (Optic 2nd) IP66 - RGBW									
VANCOUVER 19	**VA-20142**	7 LED & 2 x 7 LED (Projectors)	99 W	2812 - 3821 lm	N [18°], M [30°], E [34°x21°]	RGBW30, RGBW40	DMX, DMX/RDM	62.7 kg	
240x240 mm - 4400 mm - No decorative pattern (Optic) - 2 projectors (Optic 2nd) IP66 - RGBW									
VANCOUVER 16	**VA-20112**	7 LED & 2 x 7 LED (Projectors)	99 W	3042 - 4053 lm	N [21°], M [35°], E [48°x26°]	RGBW30, RGBW40	DMX, DMX/RDM	60.4 kg	
240x240 mm - 4440 mm - Decorative pattern type 1 (Optic) - 2 projectors (Optic 2nd) - LIGHTCONNECT™									
VANCOUVER 5	**VA-20022-LC**	1 COB & 2 x 1 COB (Projectors)	82 W	4554 - 4712 lm	G [64°]	3000K CRI80, 4000K CRI80	DALI	56.6 kg	
VANCOUVER 44	**VA-20212-LC**	1 COB & 2 x 1 COB (Projectors)	82 W	5892 - 6157 lm	G [134°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	56.6 kg	
240x240 mm - 4440 mm - Decorative pattern type 1 (Optic) - 2 projectors (Optic 2nd) IP65									
VANCOUVER 5	**VA-20022**	1 COB & 2 x 1 COB (Projectors)	82 W	4554 - 4712 lm	G [64°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	56.6 kg	
VANCOUVER 44	**VA-20212**	1 COB & 2 x 1 COB (Projectors)	82 W	5892 - 6157 lm	G [134°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	56.6 kg	
240x240 mm - 4440 mm - Decorative pattern type 2 (Optic) - 2 projectors (Optic 2nd) - LIGHTCONNECT™									
VANCOUVER 6	**VA-20032-LC**	1 COB & 2 x 1 COB (Projectors)	82 W	4397 - 4543 lm	G [58°]	3000K CRI80, 4000K CRI80	DALI	56.6 kg	
VANCOUVER 47	**VA-20222-LC**	1 COB & 2 x 1 COB (Projectors)	82 W	5892 - 6157 lm	G [134°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	56.6 kg	
240x240 mm - 4440 mm - Decorative pattern type 2 (Optic) - 2 projectors (Optic 2nd) IP65									
VANCOUVER 6	**VA-20032**	1 COB & 2 x 1 COB (Projectors)	82 W	4397 - 4543 lm	G [58°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	56.6 kg	
VANCOUVER 47	**VA-20222**	1 COB & 2 x 1 COB (Projectors)	82 W	5892 - 6157 lm	G [134°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	56.6 kg	

We reserve the right to make technical and design changes.

THAILAND
LIGMAN Lighting Co.,Ltd.
17/2 Moo 4, Monthong, Bang Nam Priao,
24150 Chachoengsao - Thailand
info@ligman.com

240x240 mm - 4440 mm - Decorative pattern type 3 (Optic) - 2 projectors (Optic 2nd) - LIGHTCONNECT™									
VANCOUVER 7	**VA-20042-LC**	1 COB & 2 x 1 COB (Projectors)	82 W	4866 - 5046 lm	G [56°]	3000K CRI80, 4000K CRI80	DALI	56.6 kg	
VANCOUVER 50	**VA-20232-LC**	1 COB & 2 x 1 COB (Projectors)	82 W	5892 - 6157 lm	G [134°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	56.6 kg	
240x240 mm - 4440 mm - Decorative pattern type 3 (Optic) - 2 projectors (Optic 2nd) IP65									
VANCOUVER 7	**VA-20042**	1 COB & 2 x 1 COB (Projectors)	82 W	4866 - 5046 lm	G [56°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	56.6 kg	
VANCOUVER 50	**VA-20232**	1 COB & 2 x 1 COB (Projectors)	82 W	5892 - 6157 lm	G [134°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	56.6 kg	
240x240 mm - 4500 mm - No decorative pattern - IP65									
VANCOUVER 1	**VA-20001**	1 COB	40 W	2775 - 2969 lm	G [65°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	55.0 kg	
VANCOUVER 42	**VA-20201**	1 COB	40 W	2775 - 2969 lm	G [134°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	55 kg	
VANCOUVER 56	**VA-20261**	1 COB	40 W	1410 - 1485 lm	G [65°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	65.5 kg	
240x240 mm - 4810 mm - Decorative pattern type 1 (Optic) - 3 projectors (Optic 2nd) - LIGHTCONNECT™									
VANCOUVER 5	**VA-20023-LC**	1 COB & 3 x 1 COB (Projectors)	103 W	6207 - 6400 lm	G [64°]	3000K CRI80, 4000K CRI80	DALI	60.8 kg	
VANCOUVER 45	**VA-20213-LC**	1 COB & 3 x 1 COB (Projectors)	103 W	7545 - 7845 lm	G [134°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	60.8 kg	
240x240 mm - 4810 mm - Decorative pattern type 1 (Optic) - 3 projectors (Optic 2nd) IP65									
VANCOUVER 5	**VA-20023**	1 COB & 3 x 1COB (Projectors)	103 W	6207 - 6400 lm	G [64°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	60.8 kg	
VANCOUVER 45	**VA-20213**	1 COB & 3 x 1 COB (Projectors)	103 W	7545 - 7845 lm	G [134°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	60.8 kg	
240x240 mm - 4810 mm - Decorative pattern type 1 (Optic) - 3 projectors (Optic 2nd) IP66 - RGBW									
VANCOUVER 17	**VA-20123**	7 LED & 3 x 7 LED (Projectors)	132 W	3790 - 5225 lm	N [21°], M [35°], E [48°x26°]	RGBW30, RGBW40	DMX, DMX/RDM	67.6 kg	
240x240 mm - 4810 mm - Decorative pattern type 2 (Optic) - 3 projectors (Optic 2nd) - LIGHTCONNECT™									
VANCOUVER 6	**VA-20033-LC**	1 COB & 3 x 1 COB (Projectors)	103 W	6050 - 6231 lm	G [58°]	3000K CRI80, 4000K CRI80	DALI	60.8 kg	
VANCOUVER 48	**VA-20223-LC**	1 COB & 3 x 1 COB (Projectors)	103 W	7545 - 7845 lm	G [134°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	60.8 kg	
240x240 mm - 4810 mm - Decorative pattern type 2 (Optic) - 3 projectors (Optic 2nd) IP65									
VANCOUVER 6	**VA-20033**	1 COB & 3 x 1 COB (Projectors)	103 W	6050 - 6231 lm	G [58°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	60.8 kg	
VANCOUVER 48	**VA-20223**	1 COB & 3 x 1 COB (Projectors)	103 W	7545 - 7845 lm	G [134°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	60.8 kg	
240x240 mm - 4810 mm - Decorative pattern type 2 (Optic) - 3 projectors (Optic 2nd) IP66 - RGBW									
VANCOUVER 18	**VA-20133**	7 LED & 3 x 7 LED (Projectors)	132 W	3763 - 5129 lm	N [21°], M [35°], E [48°x26°]	RGBW30, RGBW40	DMX, DMX/RDM	68.4 kg	

We reserve the right to make technical and design changes.

THAILAND
LIGMAN Lighting Co.,Ltd.
17/2 Moo 4, Monthong, Bang Nam Priao,
24150 Chachoengsao - Thailand
info@ligman.com

240x240 mm - 4810 mm - Decorative pattern type 3 (Optic) - 3 projectors (Optic 2nd) - LIGHTCONNECT™									
VANCOUVER 7	**VA-20043-LC**	1 COB & 3 x 1 COB (Projectors)	103 W	6519 - 6734 lm	G [56°]	3000K CRI80, 4000K CRI80	DALI	60.8 kg	
VANCOUVER 51	**VA-20233-LC**	1 COB & 3 x 1 COB (Projectors)	103 W	7545 - 7845 lm	G [134°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	54.3 kg	
240x240 mm - 4810 mm - Decorative pattern type 3 (Optic) - 3 projectors (Optic 2nd) IP65									
VANCOUVER 7	**VA-20043**	1 COB & 3 x 1 COB (Projectors)	103 W	6519 - 6734 lm	G [56°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	60.8 kg	
VANCOUVER 51	**VA-20233**	1 COB & 2 x 1 COB (Projectors)	103 W	7545 - 7845 lm	G [134°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	60.8 kg	
240x240 mm - 4810 mm - Decorative pattern type 3 (Optic) - 3 projectors (Optic 2nd) IP66 - RGBW									
VANCOUVER 19	**VA-20143**	7 LED & 3 x 7 LED (Projectors)	132 W	3886 - 5250 lm	N [18°], M [30°], E [34°x21°]	RGBW30, RGBW40	DMX, DMX/RDM	66.9 kg	
240x240 mm - 4810 mm - No decorative pattern (Optic) - 3 projectors (Optic 2nd) IP66 - RGBW									
VANCOUVER 16	**VA-20113**	7 LED & 3 x 7 LED (Projectors)	132 W	4116 - 5482 lm	N [21°], M [35°], E [48°x26°]	RGBW30, RGBW40	DMX, DMX/RDM	64.6 kg	
240x240 mm - 5180 mm - Decorative pattern type 1 (Optic) - 4 projectors (Optic 2nd) IP66 - RGBW									
VANCOUVER 17	**VA-20124**	7 LED & 4 x 7 LED (Projectors)	165 W	4864 - 6654 lm	N [21°], M [35°], E [48°x26°]	RGBW30, RGBW40	DMX, DMX/RDM	71.8 kg	
240x240 mm - 5180 mm - Decorative pattern type 2 (Optic) - 4 projectors (Optic 2nd) IP66 - RGBW									
VANCOUVER 18	**VA-20134**	7 LED & 4 x 7 LED (Projectors)	165 W	4837 - 6558 lm	N [21°], M [35°], E [48°x26°]	RGBW30, RGBW40	DMX, DMX/RDM	72.6 kg	
240x240 mm - 5180 mm - Decorative pattern type 3 (Optic) - 4 projectors (Optic 2nd) IP66 - RGBW									
VANCOUVER 19	**VA-20144**	7 LED & 4 x 7 LED (Projectors)	165 W	4960 - 6679 lm	N [18°], M [30°], E [34°x21°]	RGBW30, RGBW40	DMX, DMX/RDM	71.1kg	
240x240 mm - 5180 mm - No decorative pattern (Optic) - 4 projectors (Optic 2nd) IP66 - RGBW									
VANCOUVER 16	**VA-20114**	7 LED & 4 x 7 LED (Projectors)	165 W	5190 - 6911 lm	N [21°], M [35°], E [48°x26°]	RGBW30, RGBW40	DMX, DMX/RDM	68.8 kg	
3700 mm - Decorative pattern type 3 - LIGHTCONNECT™									
VANCOUVER 10	**VA-20071-LC**	1 COB	40 W	1560 - 1670 lm	G [56°]	3000K CRI80, 4000K CRI80	DALI	54.3 kg	
VANCOUVER 54	**VA-20243-LC**	1 COB	40 W	2586 - 2781 lm	G [134°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	54.3 kg	
4500 mm - No decorative pattern - LIGHTCONNECT™									
VANCOUVER 1	**VA-20001-LC**	1 COB	40 W	2775 - 2969 lm	G [65°]	3000K CRI80, 4000K CRI80	DALI	55.0 kg	
VANCOUVER 42	**VA-20201-LC**	1 COB	40 W	2775 - 2969 lm	G [134°]	3000K CRI80, 4000K CRI80	On/Off, 1-10V, DALI	55 kg	

We reserve the right to make technical and design changes.

THAILAND
LIGMAN Lighting Co.,Ltd.
17/2 Moo 4, Monthong, Bang Nam Priao,
24150 Chachoengsao - Thailand
info@ligman.com

Accessories

	Root mount kit **A20991**	Circuit breaker box IP44 **A21291**	Root mount kit **A21391**	NEMA 7 socket **A90891**	Zhaga Book 18 socket (Up) **A90991-U**	Smart Pole Accessories **Accs-Smart-Pole**	DALI Control System **Control-DALI**
VA-20001		•	•				•
VA-20001-LC				•	•	•	•
VA-20011	•	•					•
VA-20021		•	•				•
VA-20021-LC				•	•	•	•
VA-20022		•	•				•
VA-20022-LC				•	•	•	•
VA-20023		•	•				•
VA-20023-LC				•	•	•	•
VA-20031		•	•				•
VA-20031-LC				•	•	•	•
VA-20032		•	•				•
VA-20032-LC				•	•	•	•
VA-20033		•	•				•
VA-20033-LC				•	•	•	•
VA-20041		•	•				•
VA-20041-LC		•	•	•	•	•	•
VA-20042		•	•				•
VA-20042-LC				•	•	•	•
VA-20043		•	•				•
VA-20043-LC				•	•	•	•
VA-20051		•	•				•
VA-20051-LC				•	•	•	•
VA-20061		•	•				•
VA-20061-LC				•	•	•	•
VA-20071		•	•				•
VA-20071-LC				•	•	•	•
VA-20111		•	•				
VA-20112		•	•				
VA-20113		•	•				
VA-20114		•	•				
VA-20121		•	•				
VA-20122		•	•				
VA-20123		•	•				
VA-20124		•	•				
VA-20131		•	•				
VA-20132		•	•				
VA-20133		•	•				
VA-20134		•	•				
VA-20141		•	•				
VA-20142		•	•				
VA-20143		•	•				
VA-20144		•	•				
VA-20151		•	•				
VA-20161		•	•				
VA-20171		•	•				
VA-20181		•	•				
VA-20191	•	•					•
VA-20201		•	•				•
VA-20201-LC				•	•	•	•
VA-20211		•	•				•
VA-20211-LC				•	•	•	•
VA-20212		•	•				•
VA-20212-LC				•	•	•	•
VA-20213		•	•				•
VA-20213-LC				•	•	•	•

We reserve the right to make technical and design changes.

THAILAND
LIGMAN Lighting Co.,Ltd.
17/2 Moo 4, Monthong, Bang Nam Priao,
24150 Chachoengsao - Thailand
info@ligman.com

VANCOUVER

VA-20221		•	•				•
VA-20221-LC				•	•	•	•
VA-20222		•	•				•
VA-20222-LC				•	•	•	•
VA-20223		•	•				•
VA-20223-LC				•	•	•	•
VA-20231		•	•				•
VA-20231-LC		•	•	•	•	•	•
VA-20232		•	•				•
VA-20232-LC				•	•	•	•
VA-20233		•	•				•
VA-20233-LC				•	•	•	•
VA-20241		•	•				•
VA-20241-LC				•	•	•	•
VA-20242		•	•				•
VA-20242-LC				•	•	•	•
VA-20243		•	•				•
VA-20243-LC				•	•	•	•
VA-20251	•	•					•
VA-20261		•	•				•
VA-20281		•	•				•
VA-20282		•	•				•
VA-20283		•	•				•

	DMX Control System **Control-DMX**	DMX/RDM Control System **Control-DMX-RDM**
VA-20001		
VA-20001-LC		
VA-20011		
VA-20021		
VA-20021-LC		
VA-20022		
VA-20022-LC		
VA-20023		
VA-20023-LC		
VA-20031		
VA-20031-LC		
VA-20032		
VA-20032-LC		
VA-20033		
VA-20033-LC		
VA-20041		
VA-20041-LC		
VA-20042		
VA-20042-LC		
VA-20043		
VA-20043-LC		
VA-20051		
VA-20051-LC		
VA-20061		
VA-20061-LC		
VA-20071		
VA-20071-LC		
VA-20111	•	•
VA-20112	•	•
VA-20113	•	•
VA-20114	•	•
VA-20121	•	•
VA-20122	•	•

We reserve the right to make technical and design changes.

THAILAND
LIGMAN Lighting Co.,Ltd.
17/2 Moo 4, Monthong, Bang Nam Priao,
24150 Chachoengsao - Thailand
info@ligman.com

VA-20123	•	•
VA-20124	•	•
VA-20131	•	•
VA-20132	•	•
VA-20133	•	•
VA-20134	•	•
VA-20141	•	•
VA-20142	•	•
VA-20143	•	•
VA-20144	•	•
VA-20151	•	•
VA-20161	•	•
VA-20171	•	•
VA-20181	•	•
VA-20191		
VA-20201		
VA-20201-LC		
VA-20211		
VA-20211-LC		
VA-20212		
VA-20212-LC		
VA-20213		
VA-20213-LC		
VA-20221		
VA-20221-LC		
VA-20222		
VA-20222-LC		
VA-20223		
VA-20223-LC		
VA-20231		
VA-20231-LC		
VA-20232		
VA-20232-LC		
VA-20233		
VA-20233-LC		
VA-20241		
VA-20241-LC		
VA-20242		
VA-20242-LC		
VA-20243		
VA-20243-LC		
VA-20251		
VA-20261		
VA-20281		
VA-20282		
VA-20283		

We reserve the right to make technical and design changes.

THAILAND
LIGMAN Lighting Co.,Ltd.
17/2 Moo 4, Monthong, Bang Nam Priao,
24150 Chachoengsao - Thailand
info@ligman.com

VANCOUVER

VA-20001, VA-20201

VA-20011, VA-20191



VA-20151

VA-20251

VA-20261

VA-20111, VA-20112
VA-20113, VA-20114

Product code	Type	Height (H)
VA-20111	1 projector	4,070
VA-20112	2 projectors	4,440
VA-20113	3 projectors	4,810
VA-20114	4 projectors	5,180

VA-20121, VA-20122
VA-20123, VA-20124



Product code	Type	Height (H)
VA-20121	1 projector	4,070
VA-20122	2 projectors	4,440
VA-20123	3 projectors	4,810
VA-20124	4 projectors	5,180

VA-20131, VA-20132
VA-20133, VA-20134



Product code	Type	Height (H)
VA-20131	1 projector	4,070
VA-20132	2 projectors	4,440
VA-20133	3 projectors	4,810
VA-20134	4 projectors	5,180

VA-20141, VA-20142
VA-20143, VA-20144



Product code	Type	Height (H)
VA-20141	1 projector	4,070
VA-20142	2 projectors	4,440
VA-20143	3 projectors	4,810
VA-20144	4 projectors	5,180



VA-20021, VA-20022
VA-20023, VA-20211
VA-20212, VA-20213



VA-20031, VA-20032
VA-20033, VA-20221
VA-20222, VA-20223



VA-20041, VA-20042
VA-20043, VA-20231
VA-20232, VA-20233





VA-20061, VA-20161
VA-20241, VA-20281



VA-20061, VA-20171
VA-20242, VA-20282



VA-20071, VA-20181
VA-20243, VA-20283



THAILAND
LIGMAN Lighting Co.,Ltd.
17/2 Moo 4, Monthong, Bang Nam Priao,
24150 Chachoengsao - Thailand
info@ligman.com

VANCOUVER

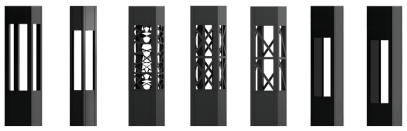

VANCOUVER
Bollards

Contemporary urban lighting furniture. Open-sided, three lattice pattern options or your bespoke design.

https://www.ligman.com/vancouver-bollards-va-bo3/

VANCOUVER
Pillar luminaires

Compact decorative landscape way-finding. Minimalist solutions delivering a play of illuminate patterns.

https://www.ligman.com/vancouver-pillar-luminaires-van-bo3/

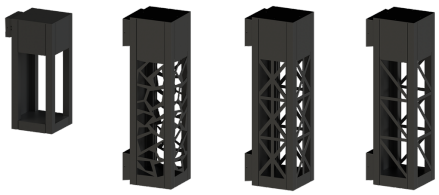

VANCOUVER
Surface facade luminaires

Contemporary urban lighting furniture. Open-sided, three lattice pattern options or your bespoke design.

https://www.ligman.com/vancouver-surface-facade-luminaires-va-su3/

We reserve the right to make technical and design changes.

THAILAND
LIGMAN Lighting Co.,Ltd.
17/2 Moo 4, Monthong, Bang Nam Priao,
24150 Chachoengsao - Thailand
info@ligman.com