

ATLANTIC 4 (AA-20076-2-2)**Product description**

Medium - Straight shade - Cone top - IP55 - IK04

**Luminaire Structure**

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry

- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Opal toughened glass diffuser

- Integral control gear

Optic

G

Product colour

01 - Black (RAL 9011)


02 - Dark Grey (RAL 7043)

03 - White (RAL 9003)

05 - Matt Silver (RAL 9006)



06 - Bronze (RAL 6014)

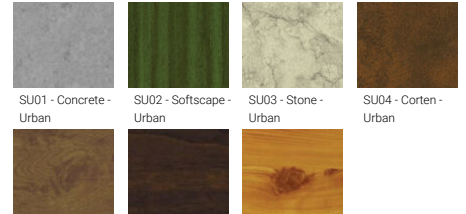Special finishes upon request

SU01 - Concrete - Urban

SU02 - Softscape - Urban

SU03 - Stone - Urban

SU04 - Corten - Urban

SW01 - Oak - Woodland

SW02 - Walnut - Woodland


SW03 - Pine - Woodland

ATLANTIC 4 (AA-20076-2-2)

Technical information

Material	Aluminium	Optic	G	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Light source	1 COB	Optic value	127°x 130°	Weight	8.2 kg
Power	41 W	CCT / CRI	3000K CRI80, 4000K CRI80	Operating temperature	-20 °C to 50 °C
Lumen	2601 - 2632 lm	Bug	B1-U3-G1	Through wiring	Single cable entry
Efficacy	63 - 64 lm/W	ULR	3%	Lens / Reflector / Optic	Opal toughened glass diffuser
Driver option	Integral control gear	ULOR	3%	MacAdam Ellipse	3 SDCM
Driver	Constant current (CC)	CIE flux code n°3	92	Lifetime L90B10 (hours)	> 55,000
Input voltage	220-240 V 50/60 Hz	Dimming type	On/Off, 1-10V, DALI	Variants (1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

AA-20076-2-2

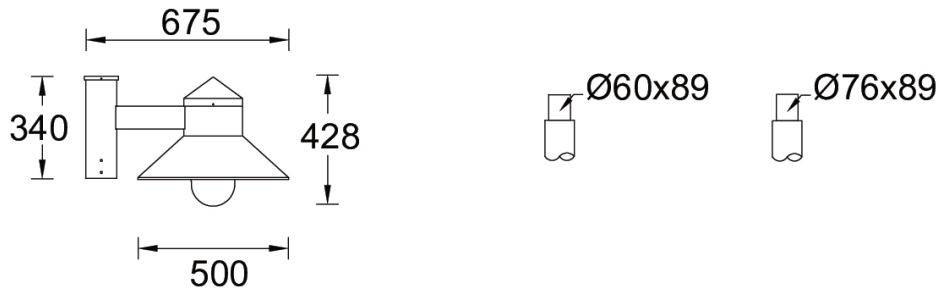

Accessories



DALI Control System
Control-DALI