

ATLANTIC 9 (AA-30186-1-1)**Product description**

Shepherd's crook - Medium - Swept shade - Dome top

**Luminaire Structure**

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Opal toughened glass diffuser
- Integral control gear

Optic

G

Product colour

01 - Black (RAL 9011)


02 - Dark Grey (RAL 7043)

03 - White (RAL 9003)

05 - Matt Silver (RAL 9006)



06 - Bronze (RAL 6014)

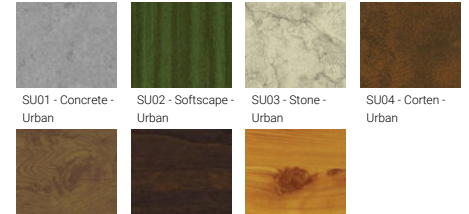Special finishes upon request

SU01 - Concrete - Urban

SU02 - Softscape - Urban

SU03 - Stone - Urban

SU04 - Corten - Urban

SW01 - Oak - Woodland

SW02 - Walnut - Woodland


SW03 - Pine - Woodland

ATLANTIC 9 (AA-30186-1-1)

Technical information

Material	Aluminium	Optic	G	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Light source	1 COB	Optic value	141°		
Power	41 W	CCT / CRI	3000K CRI80, 4000K CRI80	Weight	8.6 kg
Lumen	2976 - 3134 lm	Bug	B1-U3-G1	Operating temperature	-20 °C to 50 °C
Efficacy	60 lm/W	ULR	3%	Through wiring	Two cable entries for through wiring
Driver option	Integral control gear	ULOR	3%	Lens / Reflector / Optic	Opal toughened glass diffuser
Driver	Constant current (CC)	CIE flux code n°3	91	MacAdam Ellipse	3 SDCM
Input voltage	220-240 V 50/60 Hz	Dimming type	On/Off, 1-10V, DALI	Lifetime L90B10 (hours)	> 55,000
				Variants (1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

AA-30186-1-1

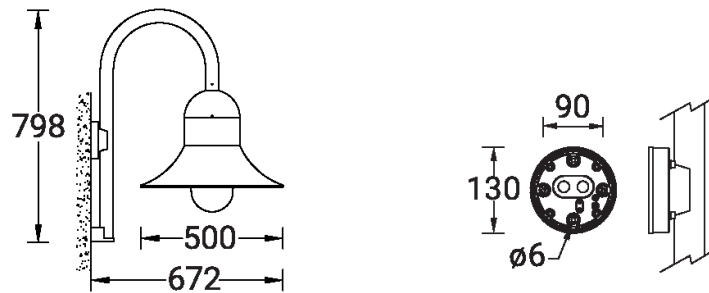

Accessories



DALI Control System
Control-DALI