

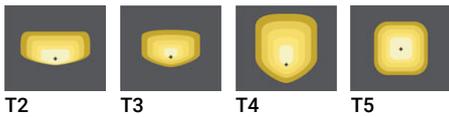
ABERDEEN 2 (ABA-20011-SO-40) (Version 1)**Product description**

Made to order for 40 W Vertical solar PV pole

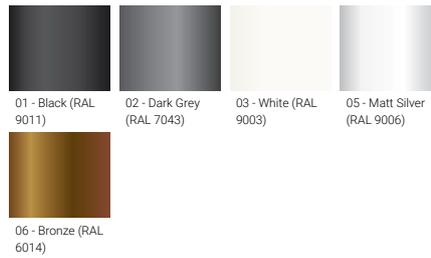
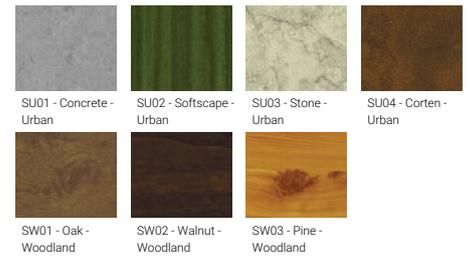
**Luminaire Structure**

- High-efficiency PMMA lens
- Clear acrylic PMMA diffuser

- Integral control gear

Optic

T2 T3 T4 T5

Product colour**Special finishes upon request**

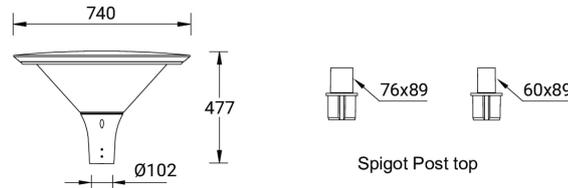
ABERDEEN 2 (ABA-20011-SO-40) (Version 1)

Technical information

Material	Aluminium	Input voltage	Solar 36 VDC	CIE flux code n°3	94
Light source	24 LED	Optic	T2, T3, T4, T5	Dimming type	Dusk to Dawn, 2 Step dimming with motion sensor override, Solar Custom
Power	40 W	Optic value	142°x59°, 142°x72°, 102°x63°, 119°x147°	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Lumen	5107 - 5582 lm	CCT / CRI	3000K CRI80, 4000K CRI80	Weight	10.5 kg
Efficacy	128 - 140 lm/W	Bug	B1-U3-G1, B2-U3-G2, B3-U2-G1	Operating temperature	-20 °C to 40 °C
Driver option	Integral control gear	ULR	100%	Lens / Reflector / Optic	High-efficiency PMMA lens, Clear acrylic PMMA diffuser
Driver	Constant current (CC)	ULOR	2%		

ABERDEEN 2

ABA-20011



Accessories



Remote solar charge controller for Solar Integrated Bollards and Vertical Solar PV poles
A92691



Vertical solar PV pole 1
SOL-20001



Vertical solar PV pole 2
SOL-20011



Vertical solar PV pole 6
SOL-20051

ABERDEEN 2 (ABA-20011-SO-40) (Version 1)



GPRS Module

A95591
