

ANDERSON 1 (AD-20001)



Product description

Medium



Luminaire Structure


- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Anodised, high-purity aluminium reflector
- Clear UV-stabilised polycarbonate diffuser
- Integral control gear
- White coated indirect shade on the top of luminaire

Optic




G

Product colour

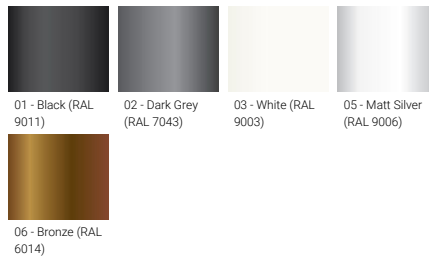

Special finishes upon request

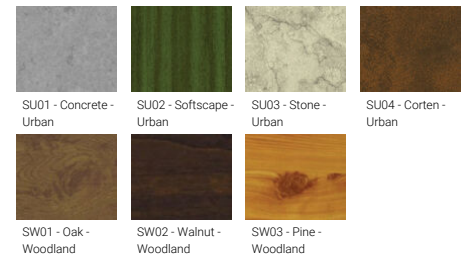

ANDERSON 1 (AD-20001)

Technical information

Material	Aluminium	Optic value	360°	Operating temperature	-20 °C to 40 °C
Light source	2 COB	CCT / CRI	3000K CRI80, 4000K CRI80	Cable	One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
Power	41 W	Bug	B1-U3-G1	Through wiring	Single cable entry
Lumen	2801 - 2997 lm	ULR	6%	Lens / Reflector / Optic	Anodised, high-purity aluminium reflector, Clear UV-stabilised polycarbonate diffuser
Efficacy	68 - 73 lm/W	ULOR	6%	MacAdam Ellipse	3 SDCM
Driver option	Integral control gear	CIE flux code n°3	91	Lifetime L90B10 (hours)	> 50,700
Driver	Constant current (CC)	Dimming type	On/Off	Lifetime L80B10 (hours)	> 63,500
Input voltage	220-240 V 50/60 Hz	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	Lifetime L80B50 (hours)	> 63,500
Optic	G		Weight	9.0 kg	Variants (On/Off)

AD-20001

