

ALDO 5 (ALD-30242) (Version 1)



Product description


Without remote driver - Constant voltage (CV) 24 V - 18x45 mm - 1025 mm - Class III - IK07




Luminaire Structure

- Powder coated aluminium alloy housing
- Adjustable aluminium extrusion bracket for ALD-30261, ALD-30262, ALD-30263, ALD-30264, ALD-30265, ALD-30266, ALD-30271, ALD-30272, ALD-30281, ALD-30282, ALD-30291, ALD-30292, ALD-30301, ALD-30302, ALD-30801
- Adjustable galvanised steel bracket for ALD-30241, ALD-30242, ALD-30243, ALD-30244, ALD-30251, ALD-30252, ALD-30253, ALD-30254, ALD-30255, ALD-30256
- Two cable entries for through wiring
- Two IP67 connectors supplied with 2x0.2 m of 2x1.0 sqmm outdoor cable
- Clear toughened glass
- Remote driver (not included)
- Uniform light distribution with uninterrupted end-to-end mounting.
- For ALD-30001 not included 24 VDC input, DMXRDM address with stable signal


Optic



Product colour

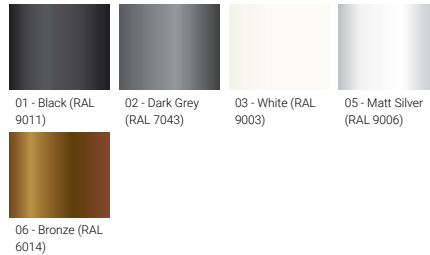

Special finishes upon request

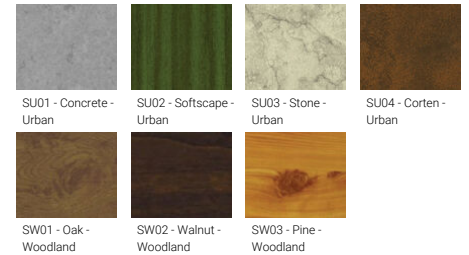


ALDO 5 (ALD-30242) (Version 1)

Technical information

Material	Aluminium	Optic	VW, EW	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Light source	60 LED	Optic value	68°, 89°		
Power	13 W	CCT / CRI	3000K CRI80, 4000K CRI80		
Lumen	652 - 808 lm	Bug	B1-U0-G0		
Efficacy	50 - 62 lm/W	ULR	0%		
Driver option	Remote driver (not included)	ULOR	0%		
Driver	Constant voltage (CV)	CIE flux code n°3	98, 99		
Input voltage	24 VDC	Dimming type	On/Off		
		Weight	0.35 kg		
		Operating temperature	-20 °C to 40 °C		
		Cable	Two IP67 connectors supplied with 2x0.2 m of 2x1.0 sqmm outdoor cable		
		Through wiring	Two cable entries for through wiring		
		Lens / Reflector / Optic	Clear toughened glass		
		MacAdam Ellipse	3 SDCM		
		Lifetime L80B50 (hours)	> 50,000		


ALD-30242

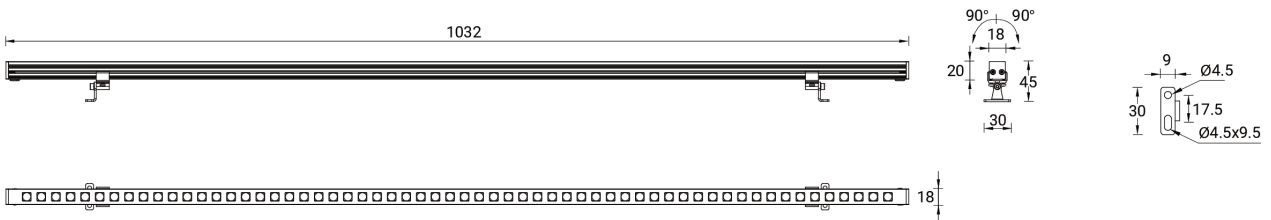

Accessories




Cable - Connector IP67 Female 2
Pin Power - 1000 mm
A65491-001

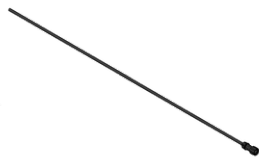

Cable - Connector IP67 Female 2
Pin Power - 5000 mm
A65491-005



Cable - Connector IP67 Female +
Male 2 Pin Power - 1000 mm
A65591-001

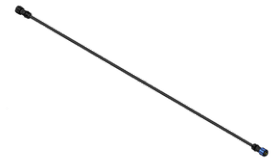

Cable - Connector IP67 Female +
Male 2 Pin Power - 5000 mm
A65591-005

ALDO 5 (ALD-30242) (Version 1)

Connector IP67 Female 2 Pin
Power
A68191



Connector IP67 Male 2 Pin
Power
A68291



End cap - Connector IP67
Female 2 Pin and 3 Pin Power
A67991



End cap - Connector IP67 Male 2
Pin and 3 Pin Power
A68091



Driver (CV) - On/Off - 36 W - IP67
- 24 V
A34491-ND



Driver (CV) - On/Off - 60 W - IP67
- 24 V
A34591-ND



Driver (CV) - On/Off - 100 W -
IP67 - 24 V
A34791-ND



Driver (CV) - On/Off - 150 W -
IP67 - 24 V
A34891-ND



Driver (CV) - On/Off - 200 W -
IP67 - 24 V
A34991-ND



Driver (CV) - On/Off - 350 W -
IP67 - 24 V
A35091-ND