

ALDO 5 (ALD-30244) (Version 3)



Product description

Without remote driver - Constant voltage (CV) 24 V - 18x45 mm - 1025 mm - Class III - IK07 - RGBW




Luminaire Structure

- Powder coated aluminium alloy housing
- Adjustable aluminium extrusion bracket for ALD-30261, ALD-30262, ALD-30263, ALD-30264, ALD-30265, ALD-30266, ALD-30271, ALD-30272, ALD-30281, ALD-30282, ALD-30291, ALD-30292, ALD-30301, ALD-30302, ALD-30801
- Adjustable galvanised steel bracket for ALD-30241, ALD-30242, ALD-30243, ALD-30244, ALD-30251, ALD-30252, ALD-30253, ALD-30254, ALD-30255, ALD-30256
- Two cable entries for through wiring


- Four IP67 connectors supplied with 2x0.2 m of 2x1.0 sqmm outdoor cable and 2x0.2 m of 2x0.5 sqmm outdoor shielded cable
- Clear toughened glass
- Remote driver (not included)
- Uniform light distribution with uninterrupted end-to-end mounting.

- For ALD-30001 not included 24 VDC input, DMXRDM address with stable signal


Optic



Product colour

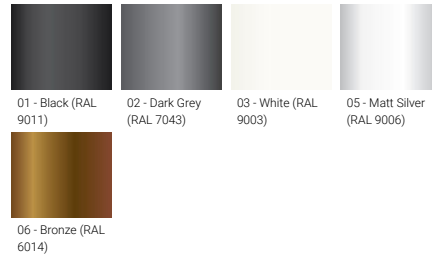

Special finishes upon request

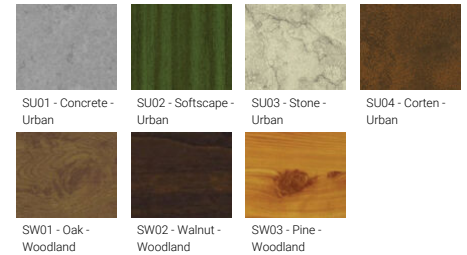


ALDO 5 (ALD-30244) (Version 3)

Technical information

Material	Aluminium	Optic	VW, EW	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	
Light source	60 LED	Optic value	67°, 93°			
Power	15 W	CCT / CRI	RGBW30, RGBW40			
Lumen	451 - 515 lm	Bug	B1-U0-G0			
Efficacy	30 - 34 lm/W	ULR	0%			
Driver option	Remote driver (not included)	ULOR	0%			
Driver	Constant voltage (CV)	CIE flux code n°3	98, 99			
Input voltage	24 VDC	Dimming type	DMX, DMX/RDM			
					Weight	0.35 kg
					Operating temperature	-20 °C to 40 °C
				Cable	Four IP67 connectors supplied with 2x0.2 m of 2x1.0 sqmm outdoor cable and 2x0.2 m of 2x0.5 sqmm outdoor shielded cable	
				Through wiring	Two cable entries for through wiring	
				Lens / Reflector / Optic	Clear toughened glass	
				MacAdam Ellipse	7 SDCM	
				Lifetime L80B50 (hours)	> 50,000	

ALD-30244

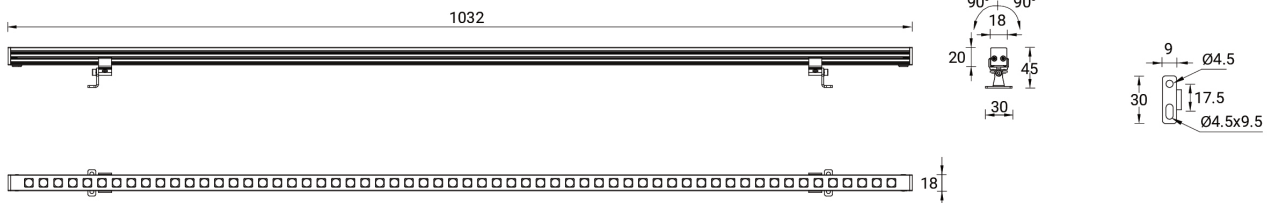

Accessories



DMX Control System
Control-DMX



DMX/RDM Control System
Control-DMX-RDM



Driver (CV) - On/Off - 36 W - IP67
- 24 V
A34491-ND



Driver (CV) - On/Off - 60 W - IP67
- 24 V
A34591-ND

ALDO 5 (ALD-30244) (Version 3)

Driver (CV) - On/Off - 100 W -
IP67 - 24 V
A34791-ND



Driver (CV) - On/Off - 150 W -
IP67 - 24 V
A34891-ND



Driver (CV) - On/Off - 200 W -
IP67 - 24 V
A34991-ND



Driver (CV) - On/Off - 350 W -
IP67 - 24 V
A35091-ND
