

ALDO 6 (ALD-30256) (Version 1)



Product description


Without remote driver - Constant voltage (CV) 24 V - 42x75 mm - 1000 mm - Class III - IK07




Luminaire Structure

- Powder coated aluminium alloy housing
- Adjustable aluminium extrusion bracket for ALD-30261, ALD-30262, ALD-30263, ALD-30264, ALD-30265, ALD-30266, ALD-30271, ALD-30272, ALD-30281, ALD-30282, ALD-30291, ALD-30292, ALD-30301, ALD-30302, ALD-30801
- Adjustable galvanised steel bracket for ALD-30241, ALD-30242, ALD-30243, ALD-30244, ALD-30251, ALD-30252, ALD-30253, ALD-30254, ALD-30255, ALD-30256
- Two cable entries for through wiring
- Two IP67 connectors supplied with 2x0.2 m of 2x1.0 sqmm outdoor cable
- Clear toughened glass
- Remote driver (not included)
- Uniform light distribution with uninterrupted end-to-end mounting.
- For ALD-30001 not included 24 VDC input, DMXRDM address with stable signal


Optic

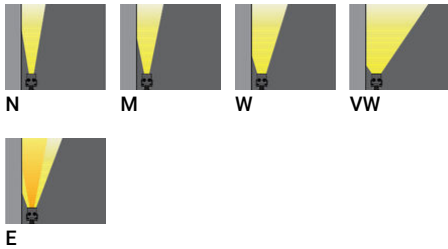

Product colour

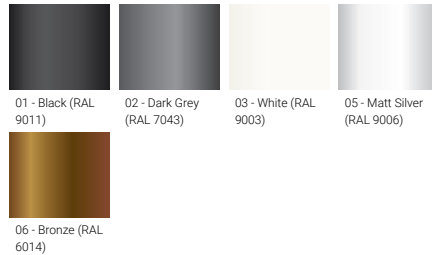

Special finishes upon request

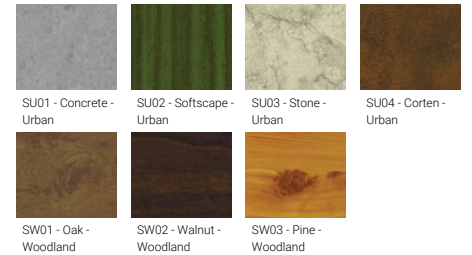


ALDO 6 (ALD-30256) (Version 1)

Technical information

Material	Aluminium	Optic	N, M, W, VW, E	Cable	Two IP67 connectors supplied with 2x0.2 m of 2x1.0 sqmm outdoor cable
Light source	24 LED	Optic value	11°, 17°, 33°, 72°, 12°x44°	Through wiring	Two cable entries for through wiring
Power	34 W	CCT / CRI	3000K CRI80, 4000K CRI80	Lens / Reflector / Optic	Clear toughened glass
Lumen	3509 - 4378 lm	Bug	B3-U0-G0	MacAdam Ellipse	3 SDCM
Efficacy	103 - 129 lm/W	Dimming type	On/Off	Lifetime L90B10 (hours)	> 120,000
Driver option	Remote driver (not included)	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	Lifetime L80B10 (hours)	> 120,000
Driver	Constant voltage (CV)		Lifetime L80B50 (hours)	> 120,000	
Input voltage	24 VDC		Weight	1.9 kg	
		Operating temperature	-20 °C to 40 °C		

ALD-30256

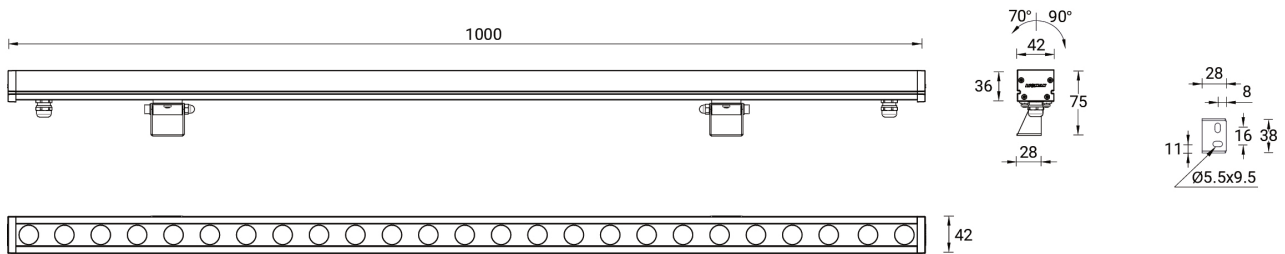

Accessories



Cable - Connector IP67 Female 2
Pin Power - 1000 mm
A65491-001

Cable - Connector IP67 Female 2
Pin Power - 5000 mm
A65491-005

Cable - Connector IP67 Female +
Male 2 Pin Power - 1000 mm
A65591-001

Cable - Connector IP67 Female +
Male 2 Pin Power - 5000 mm
A65591-005

ALDO 6 (ALD-30256) (Version 1)

Connector IP67 Female 2 Pin
Power
A68191



Connector IP67 Male 2 Pin
Power
A68291



Driver (CV) - On/Off - 36 W - IP67
- 24 V
A34491-ND



Driver (CV) - On/Off - 60 W - IP67
- 24 V
A34591-ND



Driver (CV) - On/Off - 100 W -
IP67 - 24 V
A34791-ND



Driver (CV) - On/Off - 150 W -
IP67 - 24 V
A34891-ND



Driver (CV) - On/Off - 200 W -
IP67 - 24 V
A34991-ND



Driver (CV) - On/Off - 350 W -
IP67 - 24 V
A35091-ND
