

**ALDO 8** (ALD-30292) (Version 1)



**Product description**


Without remote driver - Constant voltage (CV) 24 V - 80x95 mm - 1000 mm - Class III - IK07




**Luminaire Structure**

- Powder coated aluminium alloy housing
- Adjustable aluminium extrusion bracket for ALD-30261, ALD-30262, ALD-30263, ALD-30264, ALD-30265, ALD-30266, ALD-30271, ALD-30272, ALD-30281, ALD-30282, ALD-30291, ALD-30292, ALD-30301, ALD-30302, ALD-30801
- Adjustable galvanised steel bracket for ALD-30241, ALD-30242, ALD-30243, ALD-30244, ALD-30251, ALD-30252, ALD-30253, ALD-30254, ALD-30255, ALD-30256
- Two cable entries for through wiring
- Two IP67 connectors supplied with 2x0.2 m of 2x1.0 sqmm outdoor cable
- Clear toughened glass
- Remote driver (not included)
- Uniform light distribution with uninterrupted end-to-end mounting.
- For ALD-30001 not included 24 VDC input, DMXRDM address with stable signal


**Optic**

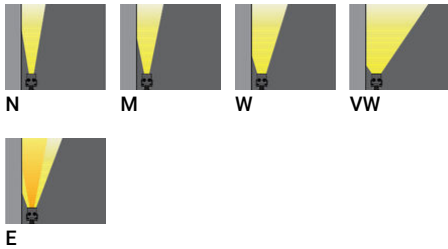

**Product colour**

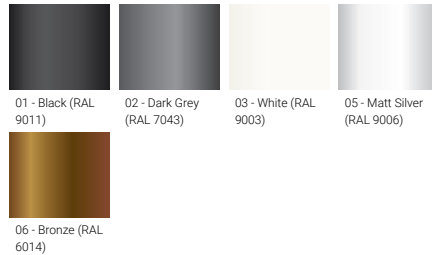

**Special finishes upon request**

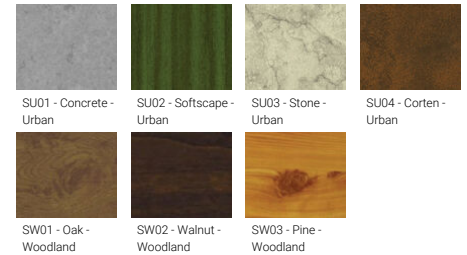


**ALDO 8** (ALD-30292) (Version 1)

**Technical information**

<b>Material</b>	Aluminium	<b>Input voltage</b>	24 VDC	<b>Weight</b>	3.2 kg
<b>Light source</b>	36 LED	<b>Optic</b>	N, M, W, VW, E	<b>Operating temperature</b>	-20 °C to 40 °C
<b>Power</b>	75 W	<b>Optic value</b>	10°, 17°, 29°, 71°, 12°x43°	<b>Cable</b>	Two IP67 connectors supplied with 2x0.2 m of 2x1.0 sqmm outdoor cable
<b>Lumen</b>	7368 - 9224 lm	<b>CCT / CRI</b>	3000K CRI80, 4000K CRI80	<b>Through wiring</b>	Two cable entries for through wiring
<b>Efficacy</b>	98 - 123 lm/W	<b>Bug</b>	B3-U0-G0, B4-U0-G0	<b>Lens / Reflector / Optic</b>	Clear toughened glass
<b>Driver option</b>	Remote driver (not included)	<b>Dimming type</b>	On/Off		
<b>Driver</b>	Constant voltage (CV)	<b>Product colours</b>	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland		


ALD-30292

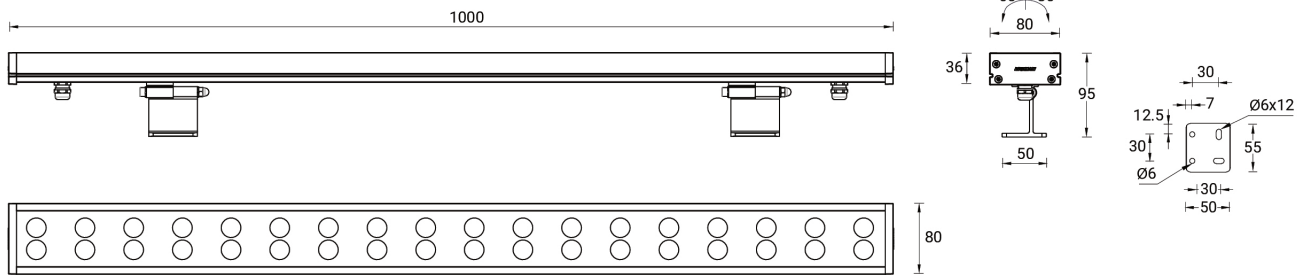

**Accessories**




Cable - Connector IP67 Female 2 Pin Power - 1000 mm  
**A65491-001**



Cable - Connector IP67 Female 2 Pin Power - 5000 mm  
**A65491-005**



Cable - Connector IP67 Female + Male 2 Pin Power - 1000 mm  
**A65591-001**



Cable - Connector IP67 Female + Male 2 Pin Power - 5000 mm  
**A65591-005**



Connector IP67 Female 2 Pin Power  
**A68191**



Connector IP67 Male 2 Pin Power  
**A68291**



Driver (CV) - On/Off - 36 W - IP67 - 24 V  
**A34491-ND**



Driver (CV) - On/Off - 60 W - IP67 - 24 V  
**A34591-ND**

**ALDO 8** (ALD-30292) (Version 1)

---

Driver (CV) - On/Off - 100 W -  
IP67 - 24 V  
**A34791-ND**

---



---

Driver (CV) - On/Off - 150 W -  
IP67 - 24 V  
**A34891-ND**

---



---

Driver (CV) - On/Off - 200 W -  
IP67 - 24 V  
**A34991-ND**

---



---

Driver (CV) - On/Off - 350 W -  
IP67 - 24 V  
**A35091-ND**

---