

## AQUA 2 (AQ-60011) (Version 1)



### Product description


Without remote box IP-rated - With remote driver /  
recessing box - Constant current (CC) 1050 mA



### Luminaire Structure

- Stainless steel body in grade 316
- Single cable entry
- One cable gland supplied with 2 m of 2x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 316
- Durable silicone rubber gasket
- Clear toughened glass
- Remote driver (included)
- Remote box IP-rated is not included and is to be ordered separately for constant current (CC) products
- Recessing box in PVC is included
- Luminaire must be submerged when operational
- Maximum depth 2 m
- Outdoor cable needs to be ordered with a specific length

### Optic



### Product colour



## AQUA 2 (AQ-60011) (Version 1)


### Technical information

<b>Material</b>	Stainless Steel
<b>Light source</b>	1 COB
<b>Power</b>	21 W
<b>Lumen</b>	1555 - 1648 lm
<b>Efficacy</b>	74 - 78 lm/W
<b>Driver option</b>	Remote driver (included)
<b>Driver</b>	Constant current (CC)
<b>Input voltage</b>	1050 mA, 18 VDC

<b>Optic</b>	M, W, VW
<b>Optic value</b>	26°, 43°, 60°
<b>CCT / CRI</b>	3000K CRI80, 4000K CRI80
<b>Bug</b>	B1-U0-G0, B2-U0-G0
<b>ULR</b>	0%
<b>ULOR</b>	0%
<b>CIE flux code n°3</b>	100
<b>Dimming type</b>	On/Off

<b>Product colours</b>	Stainless Steel
<b>Weight</b>	2.2 kg
<b>Operating temperature</b>	-20 °C to 40 °C
<b>Cable</b>	One cable gland supplied with 2 m of 2x1.0 sqmm outdoor cable
<b>Through wiring</b>	Single cable entry
<b>Lens / Reflector / Optic</b>	Clear toughened glass

### AQ-60011

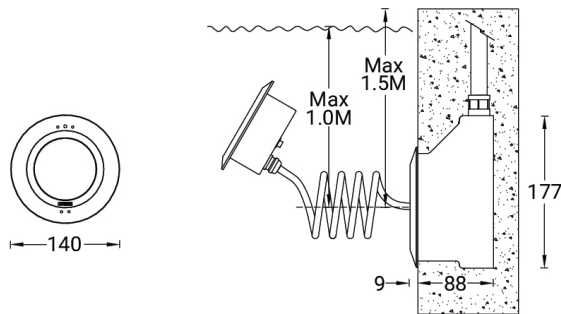

### Accessories



Remote box IP65  
**A80191**